AVIATION

The Oldest American Aeronautical Magazine

TACOMA PUBLIC LIBRARY

JANUARY 19, 1929 Issued Weekly PRICE 20 CENTS

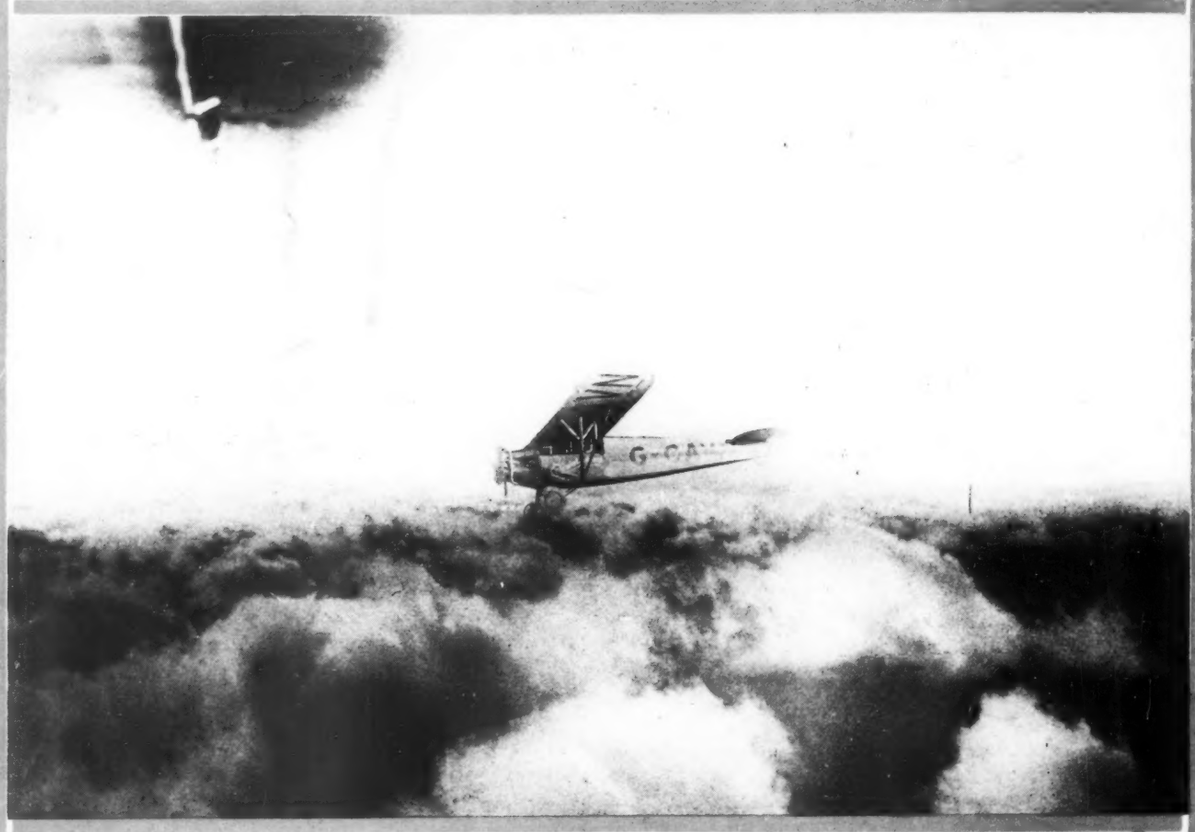

A C.C.A. Fairchild Cabin Monoplane above the clouds en route to Montreal

VOLUME XXVI

NUMBER 3

Special Features

Aeronautical Engineering Supplement

Short Distance Racing and Handicapping

The Refueling Flight of the "Question Mark"

AVIATION PUBLISHING CORPORATION
250 WEST 57TH STREET, NEW YORK

Entered as second class matter July 27, 1928, at the post office at New York, N. Y., under the act of March 5, 1879. Yearly subscription rates: Domestic, $4; Canada, $5. All other countries, $6.

TACOMA PUBLIC LIBRARY

Over frozen prairies

-TP- Aero
protects your motor

-TP- Aero, the original and only all paraffin base ZERO POUR TEST oil, will keep its fluidity as low as *40 degrees below zero.* This is a straight run and not a blended or compounded oil. Its wax free feature is responsible for its low cold test as well as its outstanding fluidity at extremely low temperatures. It also holds its viscosity at extremely high motor temperatures. It is an entirely new oil, made especially for aircraft motors. If your dealer cannot supply you, advise us.

Have you tried -TP- Aero Rocker Arm lubricant, a low cold test pure paraffin base mineral oil product?

free—

Pilot's Log Book, 36 pages of blank forms with handsome durable cover. Free to you — send the coupon.

TEXAS PACIFIC COAL & OIL CO.
Fort Worth, Texas

Please send me, without obligation, your Pilot's Log Book described above.

A-1-B

Name..... **Address**.....

City..... **State**..... **Your Oil Dealer's Name**.....

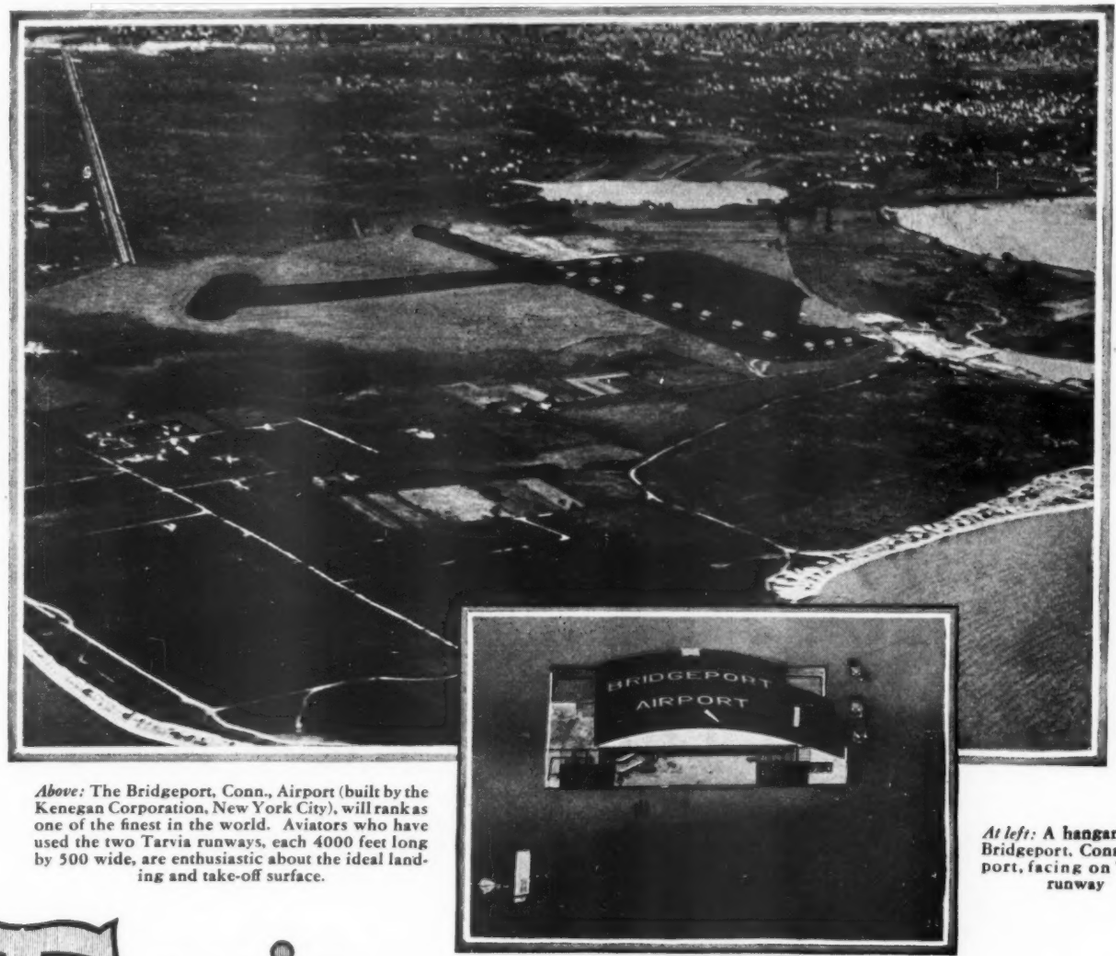

Above: The Bridgeport, Conn., Airport (built by the Kenegan Corporation, New York City), will rank as one of the finest in the world. Aviators who have used the two Tarvia runways, each 4000 feet long by 500 wide, are enthusiastic about the ideal landing and take-off surface.

At left: A hangar of the Bridgeport, Conn., Airport, facing on Tarvia runway

Tarvia

PATHWAYS *into the* SKY

SINCE 1903, Barrett Company engineers have specialized in road construction and maintenance in every section of the country. These men know how to utilize local materials—how to cope with local difficulties. They have made possible the tremendous mileage of Tarvia roads.

Now—a new field. Take advantage of the Tarvia man's vast fund of accumulated knowledge. Let him help you with this new problem.

Tarvia runways are resilient. They are economical—may be constructed largely of local materials. They are mudless, dustless and skid-safe.

For further information, get in touch with the Tarvia man at our nearest branch.

The Barrett Company

New York	Chicago	Minneapolis	Cleveland	Philadelphia	Birmingham	Boston
St. Louis	Salt Lake City	Syracuse	Providence	Buffalo	Bethlehem	Kansas City
Detroit	Milwaukee	Baltimore	Toledo	Cincinnati	Lebanon	Columbus
Youngstown						Rochester

In Canada:
THE BARRETT COMPANY, Limited: Montreal, Toronto, Winnipeg, Vancouver

You are *never* far from your next tankful of SOCONY

YOU'LL find Socony Aviation Gasoline and Aircraft Oil almost everywhere in New York and New England. Even in emergency landings, you can count on the Socony truck to arrive first.

Aviators have learned, like motorists, that Socony stands for quality products—available all over New York and New England.

In the Southwest use the products of Magnolia Petroleum Company, and on the Pacific coast standardize on General Petroleum Corporation products. These are two important subsidiaries of Standard Oil Company of New York

SOCONY

REG U S PAT OFF

AVIATION GASOLINE—AIRCRAFT OIL

STANDARD OIL COMPANY OF NEW YORK

THANK YOU *for mentioning* AVIATION

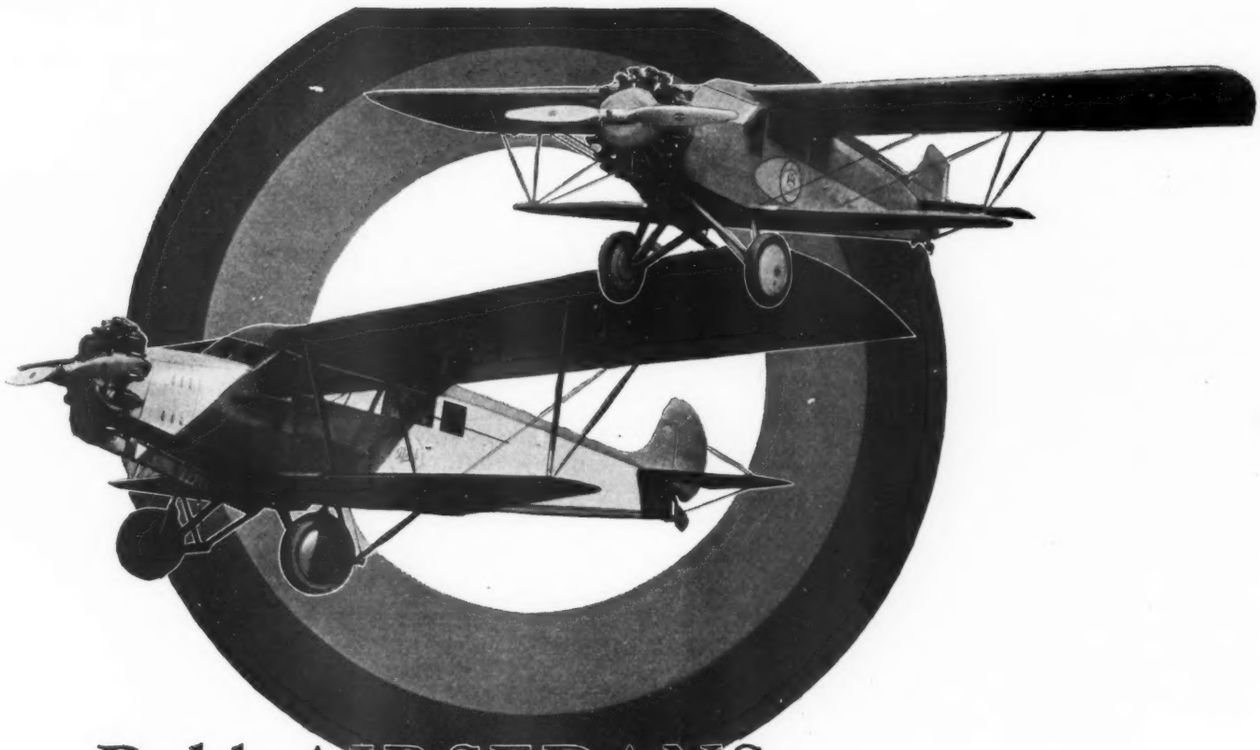

Buhl AIRSEDANS
are equipped with
BENDIX *wheels and brakes*

Alive to the vital part played by good brakes in aviation of the present and future, the Buhl Aircraft Company equips its AIRSEDANS—both Senior and Special models—with Bendix wheels and brakes.

It is natural that aviation engineers the world over should eagerly welcome this practical contribution to more efficient operation.

Their indorsement is based on these recognized and exclusive Bendix features—

perfect streamline	*high efficiency*
strength	*light weight*
precision workmanship	*water-tightness*

All standard sizes in regular production

Adopted on
ADVANCE WACO "10"
BOEING SCOUT
BUHL AIRSEDAN
CONSOLIDATED COURIER
CURTISS FALCON
CURTISS TRAINING
DOUGLAS BOMBER
FAIRCHILD CLOSED CABIN
LAIRD LC-B
MARTIN NAVY BOMBER
RYAN BROUGHAM
TRAVELAIR CLOSED CABIN
VOUGHT CORSAIR
U. S. ARMY AIR CORPS
(for all ships)

BENDIX BRAKE COMPANY
General Offices and Plant: South Bend, Indiana
Division of Bendix Corporation, Chicago

BENDIX (4) BRAKES

FOR SAFETY

FULLY PROTECTED BY PATENTS AND APPLICATIONS IN U. S. AND ABROAD

Install the "Challenger" Engine in *Your* Ship—

Travel Air; 3-place Open Cockpit Plane with Curtiss "Challenger" installed.

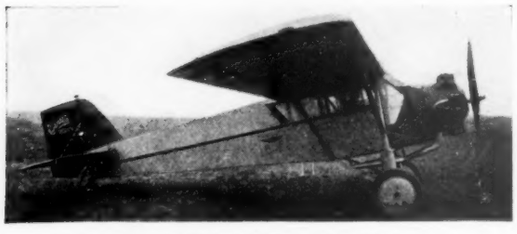

Robin; 3-place Cabin Monoplane with Curtiss "Challenger" installed.

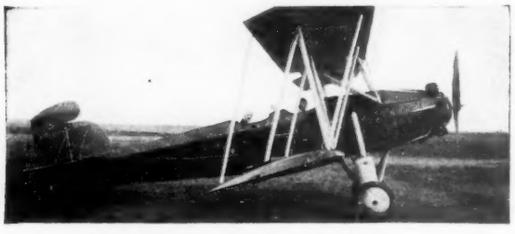

Fledgling; Open Cockpit Training Type with Curtiss "Challenger" installed.

Fairchild; 5-place Cabin Monoplane with Curtiss "Challenger" installed.

It Gives You:

Smoothness: The "Challenger's" unique arrangement of six cylinders on a two-throw crankshaft provides more perfect dynamic balance than is obtainable with any single row radial type of engine. For this reason the "Challenger" is exceptionally smooth in operation.

Reliability: One-two-three 50 hour runs on the block, plus hundreds of hours of flight-testing in the air—have established the unfailingly reliability of the "Challenger" engine, a fact attested everyday by "Challengers" in actual service.

Economy: Casey Jones on a recent 6000 miles transcontinental flight with a Curtiss "Challenger" averaged 11½ miles to the gallon of gas, without any expense for replacement or repairs.

And—

Curtiss Engineering Cooperation

With every "Challenger" goes the assistance of the Curtiss Engineering staff in designing your installation so that the "Challenger" may bring to *your* ship 100% of its known smoothness, reliability and economy.

The "Challenger" is the product of the same engineers who have produced engines for the U. S. Army & Navy planes with noteworthy success. Now the "Challenger" affords the same kind of performance in commercial use.

Eight representatives manufacturers have already purchased "Challengers" for immediate installation in their aircraft. If you want a "Challenger" for the coming season, better place your order now.

CURTISS FLYING SERVICE

INCORPORATED

GARDEN CITY, LONG ISLAND, NEW YORK

Sole Sales Agents in United States

Manufactured by Curtiss Aeroplane and Motor Co., Inc., Garden City, N. Y. Factories: Garden City and Buffalo, N. Y.

AVIATION

The Oldest American Aeronautical Magazine

EARL D. OSBORN, *Publisher* — R. SIDNEY BOWEN, JR., *Editor*
GEORGE NEWBOLD, *Business Manager* — HERBERT F. POWELL, *News Editor*
ALBERT F. MULLADY, *Asst. Business Manager* — DAVID J. LEISK, *Art Editor*

Vol. XXVI **January 19, 1929** **No. 3**

Index to Contents

EDITORIALS 157
THE REFUELING FLIGHT OF THE "QUESTION MARK" 158
SHORT DISTANCE RACING AND HANDICAPPING 163
PLYWOOD IN AIRCRAFT CONSTRUCTION.. 166
NOTES ON PROTECTION OF WOODEN PROPELLERS 168
NEWS SECTIONS .....169 TO 178
THE BUYER'S LOG..... 179
INDEX TO ADVERTISERS..... 201
AERONAUTICAL ENGINEERING SUPPLEMENT 203

AVIATION PUBLISHING CORPORATION
Business and Editorial Offices
250 West 57th Street, New York City
Cable Address: AEROENG

Publication Office: New York, New York

Subscription price: Four dollars per year. Canada, five dollars. Foreign, six dollars. Single current copies twenty cents. Back numbers, 25 cents. Advertising rates on application. Issued every Saturday. Forms close eight days previously. Entered as second class matter July 27, 1928, at the post office at N. Y., under the act of March 3, 1879. *Copyright 1928 by Aviation Pub. Corp.*

For Your Convenience in Subscribing

Please send AVIATION to

.....

.....

.....

Enclosed find check ( ) money order ( ) for $..

Breaking all records for sustained flight

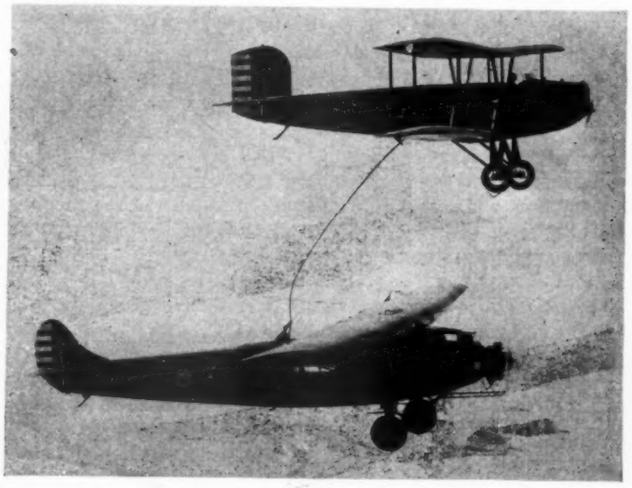

The Army Fokker, "Question Mark," powered with three 200 hp. Whirlwind Engines equipped with

SCINTILLA

Aircraft Magnetos

SCINTILLA MAGNETO CO., INC.
SIDNEY, NEW YORK
Contractors to the U. S. Army and Navy

THANK YOU *for mentioning* AVIATION

TACOMA PUBLIC LIBRARY

When the World's Crack Trains are too Slow!

Northwest Airways, Incorporated, in connection with three of the great western railroads, have selected Pratt & Whitney powered equipment to carry on the first air-rail route.

By the use of Ford tri-motor and Hamilton single-engine planes, now in daily operation between Chicago and St. Paul and Minneapolis, a full business day is saved the traveller on his trip to the East or West Coast.

Passengers have the assurance on this line that the Pratt & Whitney engines behind which they ride embody the finest in modern design and workmanship — engines with an international reputation for dependability.

THE
PRATT & WHITNEY AIRCRAFT CO.
HARTFORD CONNECTICUT

AVIATION

The Oldest American Aeronautical Magazine

Vol. XXVI JANUARY 19, 1929 No. 3

Future Production

ONE of the fundamental problems which faces the board of directors and stockholders of every aircraft concern is the number of different types which they shall produce. Off hand, it would seem as if the best policy was to bring out several different types, and, if possible, a complete line. Not only does this give a wider field for manufacturing, and thereby increases the possibilities of large volume, but, more important still, it gives an opportunity of supplying distributors and dealers with the various types which their customers may demand.

During 1928 there was a decided tendency to increase the number of types turned out by aircraft constructors, or to achieve the same end by combinations of manufacturers producing different types. Especially during this formative period, when the popular type cannot be predicted with too great accuracy, it may be well to have several different types under way.

In making their decision, however, the directors should not overlook the importance of concentration. Few people can be equally good at a variety of things. Most of them, if they are to be successful, must concentrate on one particular speciality. Too much time and effort cannot be spent on the design and construction of a plane. A plane may be outwardly much the same from one year to another, but actually it may be either vastly improved or may be not so good. For example, the air mail operated De Havillands, designed in 1917, up until 1926. Through all this period minor changes of improvements were made as defects were shown up. As a result those old mail planes held their own for a long time against planes designed ten years later, and it was with difficulty that many pilots were persuaded to bestow their favor upon the newer designs.

Concentration by an organization on one particular type must of necessity achieve better results than if the efforts of the same organization are spread over many products. From the manufacturing point of view, there is nothing that raises the cost more than too much diversification and change. From the engineering point of view, there is no doubt but that a detailed study of one particular type will lead to perfection that cannot be achieved if the staff is constantly bringing out new models. New models educate the engineer, but do not necessarily mean the production of the best planes. Even from the sales point of view, different methods and a different mentality are required to sell planes of different types. For example the selling of a few expensive transport planes requires a different mentality than the selling of quantities of two seater planes. Distributors and dealers can handle the products of different manufacturers provided that they do not compete and there seems to be no absolute necessity of their representing only one organization.

In the automobile field there has been a tendency in the past few years for companies to specialize in one particular branch of the field rather than to put out several radically different types and sizes. As production goes up in the airplane field it is perfectly possible that the present tendency towards several different types may be reversed. Large production of a single type in one plant is more economical than the same production of a variety of types. The company that establishes itself as the leader in a particular type such as the three seater open cockpit plane is in an enviable position and may be as successful as a company which produces several models but is not the leader in any of them.

Service Establishments

WITH aircraft sales completion becoming more keen each new dawn, and the item of service becoming a major factor in the sale of aircraft, there is now open a new field within a field which, if entered with a certain amount of business caution and a certain amount of knowledge pertaining to procedure of operation, should prove highly profitable to all parties concerned.

It stands to reason that the manufacturer can only act in an advisory, or perhaps a supervising capacity, in the matter of service. It is for him to see that his distributors and dealers perform the actual servicing duties. But, if such an arrangement is found to be impractical for financial reasons or lack of servicing knowledge, he must look elsewhere for the right parties and establish a service organization that is apart from his regular sales organization.

A combination sales and service organization is of course the ideal situation, but in view of the fact that at present many distributors and dealers must of necessity represent two or three non-competitive manufacturers, it follows that the servicing situation must be handled in a similar manner. Assuming that servicing must be handled outside of the sales organization because of the fact that more than one manufacturer must be represented in order to bring about a profit, it would seem altogether advisable for groups of well financed individuals (preferably those experienced in servicing work) to consider seriously active participation in this new field.

It is quite possible that state-wide representation of several non-competing manufacturers could be obtained. Then, a base of operation could be established at the largest airport in the territory. Such a base would handle local work and also act as a supply depot for the smaller shops scattered throughout the territory. The small shops could be independently owned for that matter and, act as representatives of the main service establishment. The initial capital required for such a venture is of course no small item, but the cooperation of the various manufacturers and the even closer cooperation of the various distributors and dealers in the territory, the amount of business obtainable should fully compensate for the original investment.

TACOMA PUBLIC LIBRARY

The Refueling Flight *of the* "Question Mark"

By CHARLES F. MCREYNOLDS

ALTHOUGH it has broken every record for sustaining human beings above the surface of the earth, either in balloons, dirigibles, or heavier-than-air craft, the Army's Atlantic C-2A monoplane "Question Mark" is in no sense of the word a "stunt" plane. It is a true flying laboratory; planned to test the durability of engines in continued operation while in the air, to test the plane, its equipment, and its crew for the affect of long continued flight; but most particularly planned to test the practicability of regular refueling of planes while in full flight and with present equipment. Following the record attempt, Maj. Carl Spatz, commanding ojcer of the endurance flight, stated that the chief thing they had accomplished was to refuel so many times and under so many varying conditions that no one could doubt the complete success of refueling methods which have been developed.

It is interesting to know that 37 contacts were made during the 150 hr. flight between the "Question Mark" and her nurse planes. The 37 contacts entailed a total of approximately four hours of contact flying. During this four hours of contact more than 5,000 gal. of gasoline, 250 gal. of oil, and approximately 2,000 lb. of food and supplies were transferred to the "Question Mark." This totals almost 42,000 lb. of weight handled or almost 21 tons of material that was placed on board the tri- engined Fokker while in flight. Numerous night contacts were made, some of them despite low visibility and bad air currents; and on one occasion a seven minute contact was made when all lights on the "Question Mark" were out due to low batteries, 180 gal. of gasoline being placed aboard. Nineteen full meals were transferred to the crew, while still warm, and more than two dozen quarts of ice cream were placed on board while still cold. Telegrams, letters, a collapsible bath tub, a supply of bath towels, woolen underwear, a rubber suit for Major Spatz, a window for the cabin, to replace one that had blown away, and many other items of miscellaneous nature were delivered to the crew. It is quite apparent that refuel and supply methods are now feasible enough to keep a plane up indefinitely if engines could be kept turning over.

Only Two Official Records Credited

The only official records to be credited to the plane are two new refueling records, one the new American record for having surpassed the 37 hr., 15 min. and 40 sec. flight of Lieuts. Lowell Smith and Paul Richter over San Diego, Calif., in an Army De Havilland during 1923, and the other a new world's record for endurance by means of refueling because of excelling the 60 hr. 7 min. flight of Adjutant Louis Crooy and Sergeant Victor Groenen, made in Belgium during 1928. The new American and world refueling endurance record now stands at 150 hr. 40 min. 14 sec., the start having been made at 7:26:46 A. M. Jan. 1, 1929, and the landing at 2:07:01 P. M. Jan. 7, 1929. Both start and finish were on the runways of the Los Angeles Metropolitan Airport, Van Nuys, Calif., under the supervision of N. A. A. officials headed by Dudley M. Steele, and with Joe Nikrent as timer.

Besides these two official records the "Question Mark" unofficially travelled approximately 10,000 mi. to break the former record of 4,417 mi. established by Capt. Arturo Ferrarin and Major Carlo del Prete when they flew a Savoia monoplane from Rome to Port Natal, Brazil, in

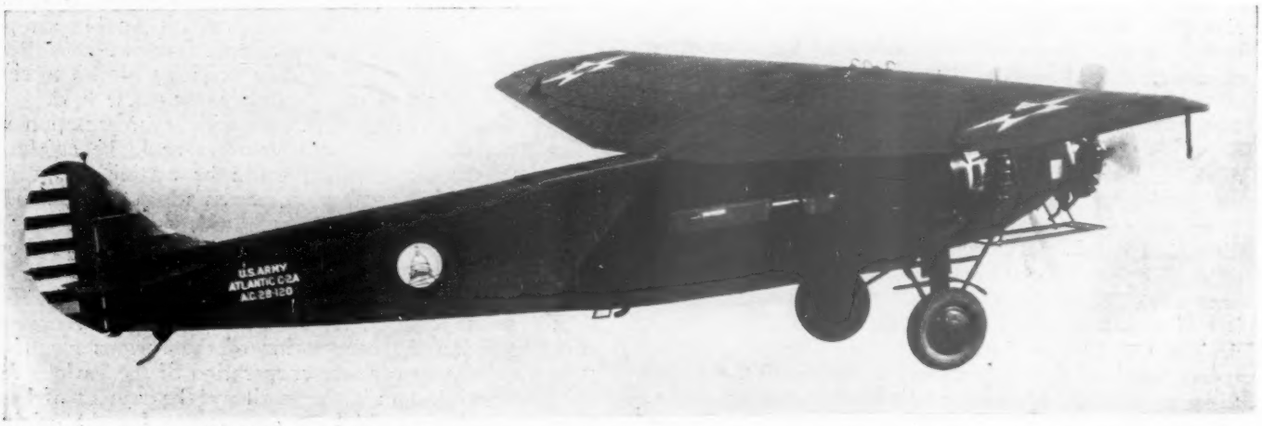

Action picture of the Army's Atlantic C-2A Fokker monoplane "Question Mark" in the air above Los Angeles.

1928, and also to surpass the 6,000 mi. flight of the Graf Zeppelin during its recent voyage to America, although the official distance over L. A.-San Diego course was only 11 laps, or 2,828.1 mi.

In addition to breaking all distance records the "Question Mark" surpassed the following records for endurance, but since they are in a different class she cannot claim any of them. American Endurance without refueling, Brock and Schlee, 59 hr., 1928; World's heavier than air, Johann Risticz and Wilhelm Zimmerman, 65 hr. 25 min., Germany; Spherical balloon endurance, Kaulen of Germany, 87 hr.; Graf Zeppelin, 111½ hr. on 1928 flight to America; French dirigible "Dixmude," 118 hr. 41 min.

Those technically minded will at once inquire just what it was that finally caused the plane to descend. Undoubtedly the fact that valve mechanisms and spark plugs functioned for more than 150 hr. without inspection or adjustment is the answer. The rocker arms on the left engine finally gave way, apparently after failure of the rocker arm lubrication system, causing that engine to cut out entirely. The other two engines were opened full to try to keep the plane in the air while Sergt. Roy Hooe repaired the trouble. Although Sergeant Hooe was able to climb out to the engine, diagnose the trouble and start work on the valve mechanism, the remaining two engines did not prove equal to the added strain and the plane was forced to the ground before the trouble could be remedied.

Dudley Steele, manager of the Aviation Department of Richfield Oil Co., congratulating the personnel of the "Question Mark." Left to right: Major Spatz, commander of the plane, Captain Eaker, Lieutenant Halverson, Lieutenant Quesada, and Sergeant Hooe.

In the opinion of Major Spatz, it will not be feasible to attempt the regular repair of engines in midair until they are placed completely inside an engine room where the mechanic can readily work on any part.

Although not wishing to make any definite prophecy for the future, Major Spatz pointed out that from a military standpoint the successful demonstration of refueling means that bombing plans can now take off with heavy loads of bombs and little gasoline, refuel over the lines with a greater load of fuel than they could have lifted from the ground and continue to a more distant objective than would otherwise have been possible. Also it is apparent that a large bomber returning against adverse winds and finding itself low on fuel could radio for a refuel plane, rendezvous in midair, and then continue safely to the home base instead of being forced down behind the enemy lines. At sea, important scouting planes could be kept aloft indefinitely by refueling, thus permitting the fleet commander an uninterrupted command of the scene of action.

An Asset to Non-Stop Distance Flying

An application of refueling which members of the "Question Mark" crew expect to see soon is its value for long distance non-stop flying. By taking off light and then loading in mid-air a plane can carry a materially greater load and thereby reach a more distant point safely.

Members of the Army endurance crew were all of the opinion that in the near future a system of aerial service stations will be inaugurated throughout the country, every large air terminal having a refuel plane to serve large passenger liners. Thus if a passenger plane finds bad weather ahead it will detour over the nearest clear refueling station take on fuel without stopping and continue by a longer route to the original terminal. A very practical point here is that by refueling often, a transport plane may carry less fuel and more pay load. By eliminating intermediate landing the wear and tear on the plane is greatly lessened and the element of danger which always enters into a landing is reduced in proportion as the intermediate stops are eliminated.

That aerial refueling will greatly speed passenger transport was demonstrated by two refuelings of the "Question Mark" during her flight to the west coast. Over Dallas, Texas, an aerial refueling was accomplished without delaying the plane more than seven minutes, which were used in circling the field and contacting the nurse plane. Continuing on to Tuscon, Arizona, the "Question Mark" landed for refueling by a good ground crew which was prepared to refuel quickly, yet the operation consumed 40 min., counting the time lost in landing and taking off. This is a clear gain of more than half an hour, in a fair test, on just one operation.

Having so definitely proved the advantages of aerial refueling, even with present crude equipment, Major Spatz visions the time in the near future when designers will build large transport planes especially for refueling and repair of engines in mid-air. These planes would probably be of 200 or 300 ft, wing spread, it is thought, with engines entirely housed and accessible to mechanics, propellers being gear driven. By using a somewhat longer hose any possibility of contact between the two planes in formation could be eliminated, and by periodically adjusting the engines before they begin to lose power the big plane could be kept in full flight across the country. Such large planes would probably be accommodated only at special terminals on each coast and would therefore eliminate entirely any intermediate stops.

Having noted the success of the "Question Mark" flight and the commercial developments which are indicated, it is interesting to study the equipment used on the recent endurance record.

The "Question Mark" is a standard Army Atlantic C-2A monoplane, known commercially as the Fokker F-7 It is powered by three stock Wright J-5 engines, each developing a maximum of 225 hp. and rated at 200 normal hp. The Atlantic C-2A is a high wing monoplane, 48 ft. 3 in. in overall length and with a wing span of 71 ft. 6 in. Height is 12 ft. 5 in., and weight empty 5,700 lb. The fuselage is of welded steel tubing, fabric covered; and the wing is of full cantilever construction plywood covered.

The Wright J-5 engines are nine cylinder, air cooled radials, weighing 500 lb. each and developing 200 hp. at 1,800 r.p.m.; 225 hp. at 2,000 r.p.m., with a piston displacement of 788 cu. in.

The refuel planes, of which there were two, were Douglas C-1C Army transports powered with the Liberty 12 water cooled engine developing 420 hp. at 1,700 r.p.m. The Douglas is a cabin biplane with a 56 ft. 8 in. span, overall height of 14 ft. and overall length of 35 ft. 8 in. This plane weighs 3,880 lb. empty and 6,450 lb. loaded. The Atlantic C-2A cruises at 90 m.p.h. and has a high speed of 115 m.p.h. while the Douglas C-1C cruises at

100 m.p.h. and has a high speed of 121 m.p.h. Two Boeing PW-9D planes were also used for message carrying, being converted into "flying blackboards" by painting each side black and writing the message on the side in chalk.

Refueling Planes Fitted With Special Tanks

The Douglas refuel planes were especially fitted with three large cabin tanks for carrying a supply of gasoline, and each also had room for several five gallon cans of lubricating oil and any incidental pouches of food or supplies. Aside from the fuel tanks and a 30 ft. hose which was dropped through the trap door in the cabin floor there was little special equipment on these planes. A block and tackle was rigged for lowering the cans and also to haul the hose up. The hose carried no valve on the lower end, there being a three way piping system in the refuel plane's cabin which permitted the operator to run gasoline from either or all of the three tanks as soon as the hose had been installed in the funnel on the "Question Mark" by Major Spatz. An additional item here was a copper wire runing down the refuel hose and grounded on the "Question Mark" each time by Major Spatz in order to prevent static electricity from the hose firing the gasoline.

Because it was necessary for the "Question Mark" crew to live on board for a protracted period and keep the engines going constantly in addition to the work of refueling, there was considerable extra equipment installed on this craft. This equipment both loaded the plane down and added to its wind resistance materially so that it was under a handicap from this angle throughout the entire flight.

To provide comfort for the crew there were three folding Army bunks built into the cabin behind the main reserve tanks, two lower and an upper. There was also a folding table and sufficient writing materials to keep the entire crew busy during the time aloft. An electric stove had been planned as part of the original equipment but was left out in order to save space. In the forward part of the main cabin there were two large gasoline tanks carrying a total of 300 gal. of gasoline in addition to 280 gal. carried by the wing tanks. Gasoline reached these tanks from the refuel hose through the large funnel at the rear trap door by means of light alumnium pipes. These pipes could be taken down and hung on wall racks between refuelings. While refueling, Major Spatz took position on a raised platform in the entry way at the rear of the main cabin, his head and shoulders projecting through a large opening in the top of the fuselage made by sliding a trapdoor aside. After the cabin tanks were filled the gasoline was pumped into the wing tanks by means of a large hand operated wobble pump on the right forward side of the cabin. For this flight the Army used Richfield aviation gasoline exclusively, pumping all gasoline carried aloft from the Metropolitan airport into the refuel planes from a permanent Richfield aviation service station which has been erected at the runway intersection.

Oil Received in Five Gallon Cans

Oil was passed to the "Question Mark" through the trapdoor in the cabin roof, being received in five gallon cans and poured into a 60 gal. reserve tank in the main cabin. Penzoil triple extra heavy was the only engine oil used, and it was pumped to the engine tanks by means of a large hand operated wobble pump on the left forward side of the cabin.

Probably the most interesting part of the special equipment was that by which the Penzoil triple extra heavy in the engines and engine tanks was periodically drained and replaced by fresh oil; and the manner in which all rocker arms of all three engines were kept lubricated from the main cabin.

From the reserve supply of lubricating oil, copper tubes led to the three engine tanks, permitting these tanks to be filled at will. Valves were also provided at each tank by which they could be drained of old oil. On the nacelles these valves were located below and to the rear of the nacelle proper and were operated by torque rods connected to an indicating board within the cabin, one on the right side and one on the left, which told whether the valves were feeding oil to the tank, draining it out, or were in the closed position. Periodically the mechanic, Sergt. Roy Hooe would turn the oil drain valve from inside the cabin, drain out the worn oil, close the oil drain valve, open the feed valve and pump the engine tank full

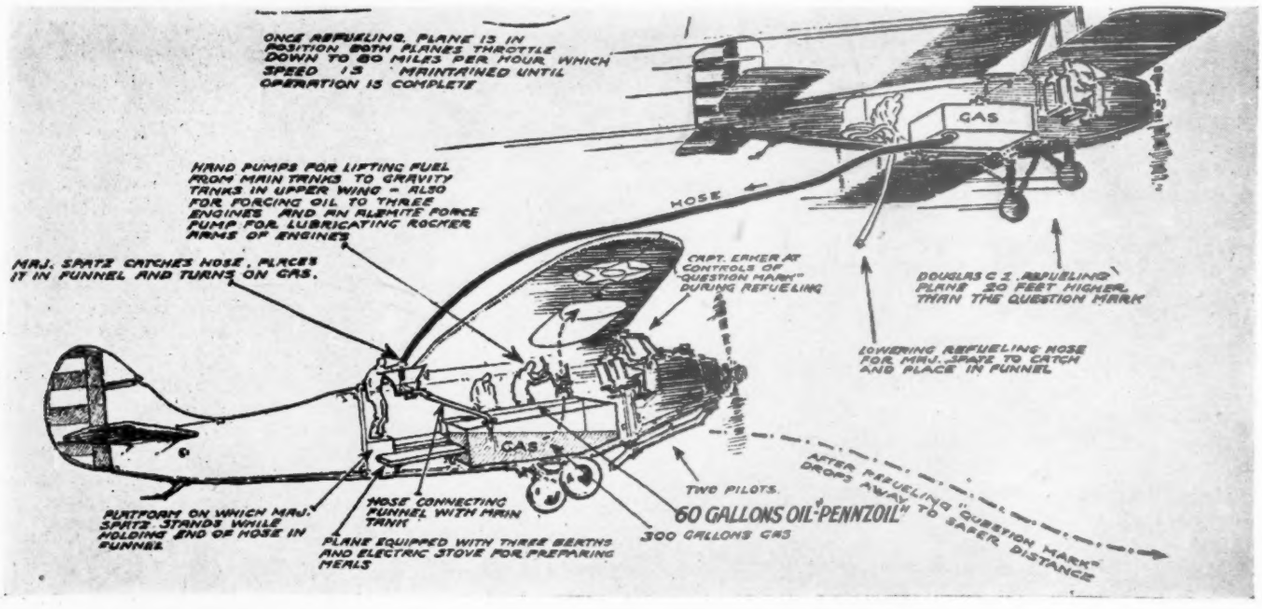
ONCE REFUELING PLANE IS IN POSITION BOTH PLANES THROTTLE DOWN TO 80 MILES PER HOUR WHICH SPEED IS MAINTAINED UNTIL OPERATION IS COMPLETE
HAND PUMPS FOR LIFTING FUEL FROM MAIN TANKS TO GRAVITY TANKS IN UPPER WING - ALSO FOR FORCING OIL TO THREE ENGINES AND AN ALEMITE FORCE PUMP FOR LUBRICATING ROCKER ARMS OF ENGINES
MAJ. SPATZ CATCHES NOSE, PLACES IT IN FUNNEL AND TURNS ON GAS.
HOSE
CAPT. ERKER AT CONTROLS OF "QUESTION MARK" DURING REFUELING
DOUGLAS C 2 REFUELING PLANE 20 FEET HIGHER THAN THE QUESTION MARK
LOWERING REFUELING HOSE FOR MAJ. SPATZ TO CATCH AND PLACE IN FUNNEL
GAS
PLATFORM ON WHICH MAJ. SPATZ STANDS WHILE HOLDING END OF HOSE IN FUNNEL
HOSE CONNECTING FUNNEL WITH MAIN TANK
PLANE EQUIPPED WITH THREE BERTHS AND ELECTRIC STOVE FOR PREPARING MEALS
TWO PILOTS
300 GALLONS GAS
60 GALLONS OIL-PENNZOIL
AFTER REFUELING "QUESTION MARK" DROPS AWAY TO SAFER DISTANCE

A cross section drawing show how the refueling contacts were made during the flight of the "Question Mark."

with the wobble pump, thus keeping fresh oil in all engines throughout the flight.

For greasing the rocker arms a system of copper tube leads was installed, all of which terminated at a board in the forward part of the main cabin. There were three typical Alemite connections on the board, one connection for the pipe line leading to each engine. In order to grease the valve mechanism of any particular engine Sergeant Hooe simply connected an ordinary Alemite pressure gun to the proper terminal and shot Alemite

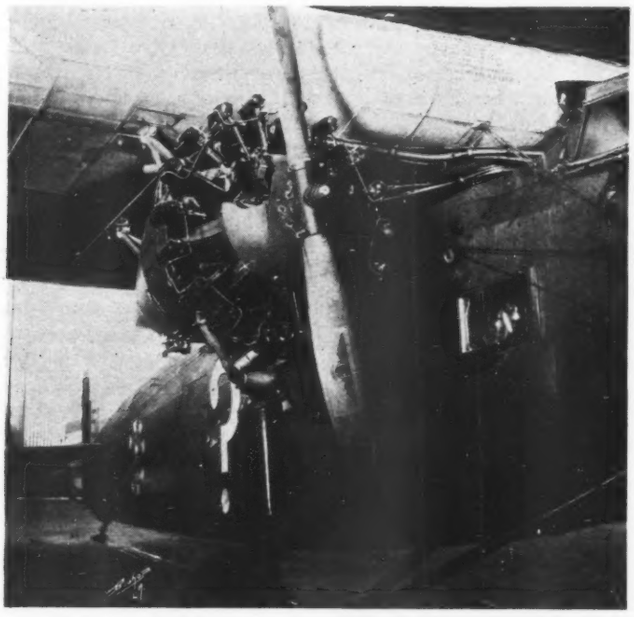

The starboard engine of the "Question Mark." Note the Westinghouse Micarta propeller, cat-walk below engine, Alemite pressure system tubing, and large lubricating oil lines from main cabin to nacelle.

grease through the pipe line to the rocker arms of the desired engine. The pipe line to each engine was divided between the upper two cylinders and lead in series from rocker arm to rocker arm each way around the engine until the lines joined at the bottom.

In order that the engines might be reached while in flight an extra door was provided on each side of the cockpit. From this door a walkway led out to each engine. The walk was of steel tube construction braced to the upper longeron and to the nacelle at the forward end of the walk, and with a hand rail running along its rear side. A step was built on the landing gear just above the tire in order that mechanic might reach the outside of the engine. Just before the "Question Mark" landed Sergeant Hooe did go out on the left catwalk, get around the nacelle to the outside step and start work on the failing cylinders but rapid loss of altitude forced him to return to the cabin before being given an opportunity to perform any repairs.

A large platform of steel tubing was mounted below the nose of the plane around the forward engine. This is reached by climbing up through the pilot's cockpit and down over the nose. This platform was not used during the flight but provides an excellent footing in case of emergency. The mechanic going out on the catwalks is equipped with a safety belt which he can hook to the engine in such a way as to leave both hands free to work. The two side walk ways are covered with composition board while the forward platform is a simple grid of steel tubing.

The crew on the "Question Mark" consisted of Maj. Carl Spatz, in command; Capt. Ira C. Eaker, second in command and chief pilot; First Lieut. Harry A. Halverson, pilot; Sec. Lieut. Elwood R. Quesada, pilot; and Staff Sergt. Roy W. Hooe, mechanic.

Capt. Ross G. Hoyt piloted refuel plane No. One, and First Lieut. Odas Moon, piloted refuel plane No. Two. First Lieut. Auby C. Strickland, Second Lieut. Andrew F. Solter, Second Lieut. Irvin A. Woodring, and Second Lieut. Joseph C. Hopkins, were all members of the refueling crews.

During the progress of the flight Major Spatz was in charge of operations on the "Question Mark," issued daily orders to the crew, and at all times made the decisions as to the route to be flown, and procedure followed in emergency. Such an emergency arose when the entire coast of Southern California was blotted out by heavy fog on Thursday night, January 3, but Major Spatz ordered refuel plane No. Two to follow him to the Imperial Valley with a load of gasoline. Although the air was very rough over the Imperial Valley, making the night flying period there most difficult and at times dangerous, the visibility was good and Major Spatz was able

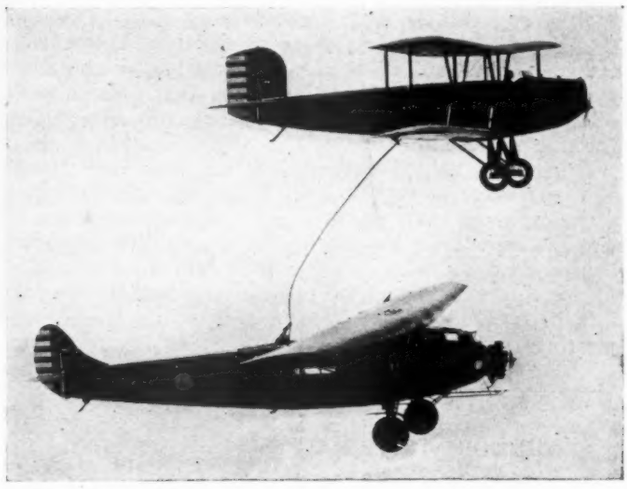

The "Question Mark" taking on fuel. Major Spatz is at the hose and Captain Eaker at the controls.

to refuel twice during the hours of darkness before returning again to the Los Angeles Metropolitan Airport when conditions had improved on the coast.

An excellent idea of the duties aboard the "Question Mark" is given by the first order published aboard her by Major Spatz, and which reads as follows:

General Instructions:

(1.) *Captain Eaker will be at the controls, with Lieutenant Halverson assisting. Major Spatz and Lieut. Quesada will be at refueling point and Sergt. Hooe will be at the pumps.*

(2.) *Duty hours for piloting and flight officer will be published at daylight each day to cover the ensuing 24 hr., commencing at 8 A. M. on the day of issue.*

(3.) *Pilots will normally fly course—Los Angeles Metropolitan Airport—Rockwell Field and return, rounding tower at Metropolitan Airport and wireless masts at Rockwell Field.*

(4.) *In case of uncertain visibility of weather conditions or motor trouble or unusual circumstances of any nature should arise, Major Spatz and Captain Eaker will be notified immediately.*

(5.) *In case of emergency requiring landing, Capt. Eaker will take the controls.*

(6.) *Capt. Eaker will be charged with winding the barographs.*

(7.) *The flight officer on duty will be responsible that the gasoline in the wing tanks is maintained at the proper level.*

(8.) *The pilot on duty is responsible for switching the gasoline feed from one tank to another.*

(9.) *Throttle setting will not be changed by pilots after having been determined by Capt. Eaker. Any condition requiring a change in throttle setting will be considered an emergency and paragraph four will be complied with.*

(10.) *Sergt. Hooe will be responsible for changing oil in the motors. This change will always be accomplished while Capt. Eaker is at the controls.*

(11.) *In case of emergency requiring jumping, the flight officer on duty is responsible that all members of crew are notified and are ready to jump before he leaves airplane. Pilot will remain at controls until last man has left cabin unless mishap is of such nature as to render controls completely useless.*

(12.) *Flight officer on duty is responsible that the proper entries are made as called for in instructions in log entries during his tour of duty.*

(Signed) CARL SPATZ,
Major Air Corps, Commanding.

Lieuts. H. W. Keefer, Roger V. Williams and Archie Roth acted as pilots for the "Blackboard" messenger planes, and First Lieut. Ray G. Harris was in charge of all preparation and servicing of the "Question Mark" for its flight. The Boeing PW-9D "Blackboard" planes were sent up with special messages and with reports on the weather as determined by the Antar Deraga laboratory which was maintained in the operations tower of the Metropolitan Airport throughout the flight. Mail and all messages not sent up on the sides of the blackboard planes were placed with the meals which were regularly passed to the fliers. Major Spatz communicated with his ground crew by dropping weighted messages with streamers attached. On several occasions, particularly at night, these messages were almost lost, indicating that a light radio communicating set would probably be more nearly ideal for this purpose.

During the refueling operations Captain Eaker would fly the Fokker in normal level flight while the refueling plane came up from the rear and took position about 20 ft. above the "Question Mark" and a very little bit ahead, usually with the tail skid about over Major Spatz's head. Major Spatz completed the refueling connection by opening the trap door in the roof and standing on a raised platform with his head and shoulders out of the plane, then as the 1½ in. hose was lowered he would grab and shove it into the funnel which fed to the "Question Mark" reserve tanks, thereafter holding the hose in place until the fueling was completed. Normally there was no perceptible variation in the distance between the two planes but on three separate occasions the refuel plane pulled away and showered Major Spatz with gasoline before the operator above was able to stop the flow.

It was interesting to observe, at the close of the flight, that oil drained from the three engine tanks had completely drenched the tail surfaces and rear of the fuselage.

A novel propeller combination employed on the "Question Mark" proved completely satisfactory. Stock two blade Westinghouse Micarta propellers of 8 ft. 10 in. diameter were used on the wing engines while a special three blade Standard Steel propeller was mounted on the nose engine. This arrangement seemed more quiet than the usual propeller equipment and greatly added to the comfort of the crew. Additional equipment consisted of Eclipse hand inertia starters, Pioneer instruments and fuel pump, Willard 12 volt batteries and Goodyear tires.

All Pass Physical Examination

At the end of the flight all members of the crew were given the Air Corps physical examination. With the exception of normal fatigue, which was not as much as had been anticipated, all of the men were in first class condition, Major Spatz passing a better examination at the close of the flight than he had before the start.

The other four members of the crew seconded Major Spatz's statement that he had enjoyed a six day vacation in the air. Every angle of the flight strongly indicates the complete feasibility of keeping crews aloft for long periods and of indefinite refueling without undue effort or trouble, forecasting the very early application of these methods to certain phases of commercial flying.

VENDORS' MATERIAL USED ON WRIGHT ENGINES No. 9447-9448-9449 OF THE QUESTION MARK

Parts.	*Vendors.*	*Address.*
Valves	Thompson Products Co.	Cleveland, Ohio.
Piston Rings	American Hammered Piston Ring Co.	Baltimore, Md.
Ignition Wire "Airtite"	The Acme Wire Co.	New Haven, Conn.
Outer Ball Bearings, S.R.D.	Standard Steel & Bearing Co.	Plainville, Conn.
Rear Ball Bearings	Standard Steel & Bearing Co.	Plainville, Conn.
Thrust Bearings S.K.F.	S. K. F. Industries, Inc.	2004 Broadway, N. Y. C.
Accessory Ball Bearings (Normal)	Norma Hoffman Bearings Corp.	Stamford, Conn.
Magnetos (Scintilla)	Scintilla Magneto Co., Inc.	Sidney N. Y.
Carburetor NAT—4-B	Stromberg Motor Devices Co.	58 E. 25th St., Chicago, Ill.
Valve Springs	Miller and Van Winkle	18 Bridge St., Brooklyn, N. Y.
Spark Plugs BG	B. G. Corporation	136 W. 52nd St., N. Y. C.
Crankshaft	Union Switch & Signal Co.	Swissvale, Pa
Articulated Rods	Bethlehem Steel Corp.	Bethlehem, Pa.
Master Rods	Bethlehem Steel Corp.	Bethlehem, Pa.
Master Rod Bearings	Bohn Aluminum & Brass Corp.	Detroit, Mich.
Cam Drive Gear Rough Forging	The Bassick Manufacturing Co.	2650 N. Crawford Ave., Chicago, Ill.
Cylinder Barrell Rough Forging	Bethlehem Steel Corp.	Bethlehem, Pa.
Cam and Gear Rough Forging	Bethlehem Steel Corp.	Bethlehem, Pa.
Cam Driving Gear Rough Forging	Tioga Steel & Iron Co.	Easton, Pa.
Cam Driving Pinion Rough Forging	Bethlehem Steel Corp.	Bethlehem, Pa.
Ex. Valve Rocker Rough Forging	Bethlehem Steel Corp.	Bethlehem, Pa.
Int. Valve Rocker Rough Forging	Bethlehem Steel Corp.	Bethlehem, Pa.
Valve Tappet Guide Rough Forging	Bethlehem Steel Corp.	Bethlehem, Pa.
Ex. Pipe Flange Rough Forging	Endicott Forging & Mfg. Co.	Endicott, N. Y.
Intake Pipe	Endicott Forging & Mfg. Co.	Endicott, N. Y.
Crankshaft Bearing Rear	American Tube & Bending Co.	New Haven, Conn.
Aluminum Alloy	Bohn Aluminum & Brass Co.	Detroit, Mich.
Gaskets	Aluminum Company of America	Pittsburgh, Pa.
Counterweights	The Vellumoid Company	Worcester, Mass.
Alemite	Tioga Steel & Iron Co.	Easton, Pa.

Uniflows were not installed on engine at factory.

Short Distance Racing *and* Handicapping

By LADY MARY HEATH

AS one who has "suffered" much from the loss of the odd second in short distance races, and has worked hard to catch up on the allowances, the work of the man behind the scenes has always much intrigued me.

The handicapper is everyone's whipping post. Everyone comes to him with grievances and imagined wrongs, and he has usually a very hard time to straighten everything out.

It was of great interest to me, therefore, some little time ago to nail down our official British handicapper, Mr. Goodman-Crouch, now in this lovely country, in this reciprocity business, and to pick his brains a little. Mr. Goodman-Crouch is one of the most important member of the Civil Flying Department of the Air Ministry, and for many years has been in the Research Department at Fainborough when he was not engaged in officially handicapping for the Royal Aero Club.

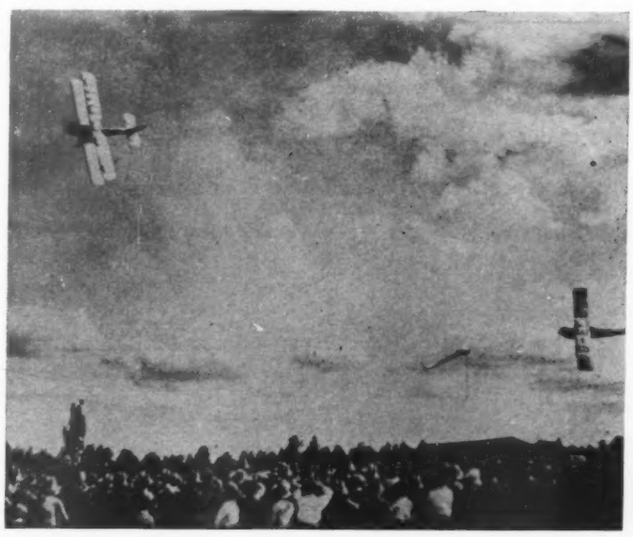

Action picture of a DH "Moth" winning a light plane handicap race held in England.

It has always amazed us racing pilots how he can ferret out our humble efforts in hoodwinking him by reducing load and resistance, by cutting out, droop, by exchanging cylinder head gaskets for brown paper dipped in goldsize and in other ways trying to "get past him." That we are all still on speaking terms after a couple of seasons including well over a hundred races—mostly with a bunch of four or five splitting seconds across the finishing line—speaks volumes for the efficiency and the fairness of his work.

Handicapping means real hard work. It means taking in the official reports of every air race all over the country, to keep in touch with the performances of machines and pilots all through the season. It means watching the performances of machines that go outside of the country and compete abroad. It means giving up, perhaps the hardest condition of all, the cheery evening spent in aviation small talk with a dozen boon companions the night before a race or a race meeting, and it means the closest scrutiny of every machine on the day of the race to see that it fulfills its declared conditions of weight, and streamlining, etc., before it goes out to the starting line. It means, above all, a display of race tact, as, for instance, when the man possessed of a 200 hp. pursuit plane solemnly expects one to believe that it will not do more than 40 m.p.h.

For air races, handicap allowance is arrived at by the following means:

It is necessary to know the speed of each machine, founded on some recognized basis, such as actual performance, i. e.—

(a) Known speed or estimated speed.
(b) Speed that should be obtained by the application of the recognized formula.

Whichever of these means is applied, and they will be described later, the manner in which the handicap allowance is obtained, is the following:

The machines are put put down in order of speed in column four*, starting at the slowest. The second column is made to contain the times estimated on those speeds which will be taken for completing the course. Corrections are then necessary, which will be made in the third column.

The corrections can, of course, be equally well made on the speed basis. That is to say, the original speed estimated, or known, can be modified to take into account the meteorological conditions, the turning points in the course and other considerations of like nature.

For instance, it is obvious that a machine which is capable of 200 m.p.h. in level flight will certainly attain a very much reduced speed when flown over, say, a triangular course of short lap length. This reduction of speed is greater in the case of fast machines than slow ones, since a greater distance is flown.

Meterological conditions are taken into account, and it has been the practice in English racing never to publish the final handicap allowances until the morning of the races so that the latest weather reports may be taken into account when introducing the weather factor.

Before talking about time for the course, the speeds

* See table on page 164.

of the air craft being thus adjusted, it is a simple mathematical problem to work out the estimated time taken by each machine to cover the lap, or if the race is not flown in more than one lap—the entire course.

It should perhaps be mentioned that the actual measurements of the course and distance are extremely difficult, and the results of one race can only be used as a basis for estimating speeds over a separate course on a relative basis. This is mostly due to the extreme difficulty of obtaining the exact length of any leg, or course, and a variation of 10 m.p.h. has often been found in the results obtained by the most accurate timing, due entirely to this cause.

From the time taken to fly the course (see column 2), the time taken from zero, or starting time (see column 3), is then obtained. For instance, if the slowest machine, or "limit man," takes three hours and the fastest, or "scratch man," takes one hour, the "limit man" is placed at zero starting time, while the "scratch man" is placed at two hours behind zero hour.

The actual handicap allowances (see column 4), which are posted up for public information prior to race, are then obtained by the reverse process, i. e., that of subtracting the estimated time taken for the course by the scratch man from the times taken by the other competitors.

The resulting table then is as follows:

1. *Speed of air craft in m.p.h.*	2. *Estimated time for lap or course.*	3. *Time from zero or starting time.*	4. *Handicap allowances.*

The above is obviously a simple mathematical process and it remains to discuss the actual method of which the estimated speeds are obtained.

There are two main headings under which this work falls.

1. That of estimating, as nearly as possible, the actual speed contained by the aircraft considered. This may be done (and this is the simplest method) by a knowledge of the actual performance on some previous occasion of the aircraft in question.

Here again it is necessary to bear in mind the fact that these factors have to be considered:

(a) The fact that the speeds quoted from previous timings can only be considered as relative to one another, due to the human element in course measurement.

(b) The fact that these speeds may have been obtained by pilots of varying racing capacity.

(c) The fact that the weather conditions on the varying occasions considered, may not have been consistent.

Of the above three conditions, the second possibly is the only one which requires explanation.

Speed Considerations Important

It will be readily realized that if one aircraft is continuously flown by a pilot of exceptionally good racing capacity, the times obtained will be better than those which would have been obtained by a racing pilot of normal capacity. Since the above method is only employed when it is desired to give the prize to the best pilot, it is only right that all considerations bearing on the speed of the aircraft should be taken into account, the necessary corrections being made for piloting skill, which on former occasions had led to success.

It should be pointed out that when this method has been employed in air races in Great Britain, the official handicapper has always made a point of noting, during all races, the number of seconds lost on turning points within sight of the airdrome at which he is stationed.

This method then leads to the prize being gained purely and solely by the piloting skill of the one in charge of the machine, and this method in the same way leads to the extremely close finishes which give the finest element of sport that has characterized air racing in Great Britain.

2. Now it is obvious that it may be desirable to give a prize to aircraft designers who are capable of reducing the parasitic resistance to the utmost minimum, or

A typical scene at any air carnival held in England, showing the crowds that gather at such events.

Lined up for a heat in a recent handicap race. The author's plane, second from right, won the race.

possibly to engine designers who are capable of obtaining the best power to weight ratio.

In this case, a formula is used for obtaining the speeds on which the handicap allowances of the race are based. Any suitable formula can be used for this purpose, according to the ideas of the promoters. One such formula, which has been used in England, has been based on the span and the weight of each competing plane. This has led to interesting results.

A Premium on Freak Machines

It must be borne in mind, however, that this second method places a premium on freak machines which are designed to defeat the formula. Moreover, close and sporting finishes cannot be hoped for, as it is a matter of coincidence, of quality, or design, if two machines happen to cross the finishing line together.

These two methods for obtaining the speed, which is placed in the first column of the table, are the main ways in which this work is carried out.

It is, of course, a fact that very often a new type of machine is entered. The application of the second method to such a type is a matter of mathematical simplicity, while that of the former demands a knowledge of the theoretical method of estimating performances.

A factor which, however, is common to both methods, is that of applying the course correction figure, and it may be of interest to know that while a light aeroplane, such as the "Moth" or "Avian," is capable of a speed on a straight course in level flight of about 100 m.p.h., it is reduced to a figure of approximately 93 m.p.h. when flying on a triangular lap with a total length of five miles. A machine such as the Avro "Avenger," which approximates 200 m.p.h. in straight flight, is reduced on such a lap to a figure in the neighborhood of 170 m.p.h.

If it is desired, however, to hold race meetings at which the prizes are to be given for the best piloting, it is advisable to use the first method of obtaining the speeds on which the handicap allowance figures are based, while if it is desired to give prizes for aircraft design, or for engine boosting, the second method with an appropriate formula, is suitable.

Before the estimation of speed with regard to figures under column one, it is, of course, necessary to bear in mind the effect of passengers, not only as regards their weight, but also as regards the resistance of their heads and shoulders in machines with open cockpits, while the streamlining of struts and fittings must also be taken into account.

For instance, the effect of the weight and resistance of one passenger in a two or three seater with open cockpits, and capable of some 120 m.p.h., is something in the order of 3/5 m.p.h., while lower down, the speed scale in the two seater light plane class, is approximately 1½ m.p.h. The covering in of passenger's open cockpit by a streamlined cover has a further effect of from 1 to 2 m.p.h.

The author winning her first Trans-African race, held at Johannesburg.

Plywood *in* Aircraft Construction

By JAMES R. FITZPATRICK
Vice President, Haskelite Manufacturing Corp.

FROM the very beginning of man's efforts to fly, wood has played a major part in the construction of successful flying machines. Both light weight and exceptional strength are required for airplanes, so it was natural that the early builders turned to wood and, as the design improved and more complex problems arose, they turned to plywood for many structural purposes.

Plywood as first used was not waterproof and consequently was not suitable for service in all kinds of weather. During the World War, however, the Government found and successfully tested a really waterproof plywood, which had been developed for use in canoes. The plies of this plywood were attached to each other with a blood albumen glue, which produces an all weatherproof material, capable of being formed into various curvatures without injury to the glue or the product. Huge quantities of it were used by the Government in airplane construction. Every test possible was applied to the finished plywood to insure that only the best reached the finished plane, thereby increasing the factor of safety.

Plymetl a Post-War Development

The Haskelite Manufacturing Corp., at Chicago, Ill., played an important part in supplying the government demands and today its factories turn out plywood and Plymetl which are known and tested in many industries. Plymetl is a steel or metal-faced plywood developed after the war in response to a demand for a plywood which had exceptional resistance to impact. A method was worked out for gluing thin metal faces to the weatherproof plywood and the resulting combination was termed "Plymetl."

At the main plant in Grand Rapids, great quantities of high grade veneer, from which the plywood is to be made, are stored in large warehouses. When veneer is cut from a steamed log, it is necessary that it be thoroughly dried before it is used. On receipt of a shipment of veneer at a Haskelite plant, the first thing done is to dry it in great large oscillating hot plate redriers, not only reducing the moisture content, but leaving the pieces of veneer substantially flat. Since the veneer as received contains numerous defects due to careless cutting or defects in the log, it is necessary that these imperfections be cut out. This is done at the Haskelite plant by large clippers which trim each piece to a width free of defects and to one of a

A section of the Grand Rapids, Mich., plant of the Haskelite Manufacturing Corp.

number of standard lengths. The pieces thus dried and clipped are passed to the stock room, where veneers of the same kind of wood, same thickness, and same length are kept together.

Very large storage is necessary for the veneer in order that an ample supply of dried veneer of the proper kind, size, etc., be on hand at all times. Not only are many different kinds of wood veneer stored, but each kind must be available in a large number of sizes, widths, thicknesses, and lengths.

When an order is received to make a set of panels

The main plant of the Haskelite Manufacturing Corp. at Grand Rapids, Mich.

Two interior views of the Haskelite Manufacturing Corp. factory at Grand Rapids, Mich.

of a certain material, size, and so on, sufficient veneers are withdrawn from stock and placed upon a movable platform. The length of these veneers withdrawn are generally correct, but their edges have to be made straight and perpendicular to the faces. This work is done by jointer machines. The various veneers are then sorted to make the several plies of the different panels wanted. Usually one piece has to be cut narrower to make the proper total width.

Following the sorting, the veneers for the face plies are sent to a taping machine which holds the veneers together by pasting a thin paper tape on the faces with the edges butted together. In this way each panel is assembled to the desired full size. Great pains are taken at the Haskelite plant to eliminate any small stresses which might be set up between the plies. Core plies are thoroughly dried after their faces have been coated with glue, but the glue is not set by this drying process. After this is done, fresh glue is spread on the backs of the two face plies that form a single panel, and these are placed above and below the core so that the grain of the plies runs at right angles to the grain of the core. The edges of the assembled veneers are coated with Haskelite glue, and the plies so assembled are placed in larger presses, whose steam heated plates are 5 x 8 ft. in size, to be unified by pressure and heat.

In order that the very best results can be secured, all plies of the panels are very dry just before the glue is spread on them. Also, the time between the application of the glue and the pressing operation is very short so that no ply has a chance to absorb moisture. This procedure eliminates the chances of the plies shrinking and producing initial stresses which are common with many gluing systems. The moisture of the glue spread on the face plies soaks up the dried glue on the core so the glue between the plies has the right consistency for producing a highly waterproof joint. The gluing press consists of smooth faced hollow plates heated to 210 deg. by steam circulating through the plates. Plies to be glued together are placed between two of these plates and hydraulic pressure applied. The pressure used is adjusted to the size of the panel and the pressure required per square inch of the panel surface. During the pressing, heat penetrates the plies; setting the glue and producing a thoroughly unified plywood.

Following the gluing and pressing, the panels are carefully planed to insure an absolutely uniform thickness. This point in the preparation is particularly important for airplane manufacturers as they require uniform thickness in the materials they use. Usually the panels are about two inches oversize all the way around and before stored, these edges are trimmed off. Finished panels intended for flat work are stored flat in the drying room, but panels intended for curving are sent to the molding department for that operation.

In molding Haskelite plywood, it is first actually boiled in vats to soften the wood. The blood albumen glue reveals its ability in this process, for it retains its properties and when the molding process is completed, the finished product is just as waterproof and just as well unified as the original flat panels.

In addition to carrying huge stocks of plywood and Plymetl, the Haskelite Manufacturing Corporation carries on extensive research and testing of these materials. Massive as well as delicate testing machines are employed constantly in making actual tests on all sorts of woods and plywood. These tests include tests in column-bending, tension strength, splitting resistance, shearing strength, cupping tendencies, twisting tests, determination of elasticity, and many others. Results of thousands of these tests have been tabulated and provided in convenient blue print form for the convenience of users.

Stocking Haskelite plywood at the main plant at Grand Rapids.

Primarily the business of the Haskelite Manufacturing Corp. was the production of airplane plywoods and Plymetl. Scores of other uses have been found for these materials as the light weight, strength and waterproof qualities have proven valuable in the manufacture of automobile roofs, truck bodies, marine bulkheads, etc.

Notes *on* Protection of Wooden Propellers

By CHASE S. STORY

DUE to the fact that the performance and income of the airplane depends so greatly upon the condition of its propeller, or propellers, every precaution should be taken to prevent costly repairs and tie-ups during the rainy season.

The wooden propeller requires more care and attention than other types. There have been numerous cases in the history of wooden propellers where a spinner, or even the propeller itself, would burst in the air due to the action of the weather in soaking up unprotected portions of the wood. Rarely indeed is there any record of a propeller that had been properly inspected and protected failing in flight.

To protect the wooden propeller from watersoaking, first make sure that the propeller is dry. If damp it must be very slowly dried in a warm dry room, the process extending over several days depending upon the amount of water which has been soaked up. When the propeller is dry, remove the hub and give the hub hole two coats of spar varnish or waterproof paint. Use plastic wood, well pressed in, to fill cracks between the wood spinner and the propeller. Next touch up all places on the blade where the finish has been scarred leaving bare wood, especially on the back side of the blade where sand cutting is greatest. If possible, two coats of spar varnish or high grade enamel should be applied to the propeller. The finish should be applied as evenly as possible in order not to affect the balance, and particular care must be taken that the varnish does not run or sag, caused by too heavy application. Do not attempt to varnish over lacquer finishes. Propellers with lacquer type finish must be sprayed by persons well familiar with the process.

Should Keep Leading Edge Touched Up

When complete refinishing is necessary, from seven to nine coats are required to withstand possible flying through rain. It pays to keep the leading edge touched up when it is not protected by metal tipping.

It must be remembered that for any given amount of finish which is added to one blade an equal amount must be added to the corresponding place on the other blade in order to keep within reasonable balance.

On the ground, the greatest menace to the propeller is the person who, unable to place his plane under cover, carefully wraps up the propeller with burlap, canvas, oil cloth, etc. In the first place when the airplane is at rest on the ground, or has been stored away, even in a well-protected hangar, always leave the propeller in a horizontal position. The reason for this is apparent in the varying temperatures found in a room at altitudes sometimes as little as two or three feet apart, while outdoors there is almost always an area of high humidity close to the ground and if the propeller is allowed to remain at rest with one blade closer to the ground than the other, the lower will almost certainly absorb more moisture.

In the second place, never wrap a propeller in anything which can become saturated with water, or which can catch and hold water or moisture in such a way that it will be against the propeller blade. Particularly is this true where close fitting spinners are used. A propeller without covers will quickly drain off and dry after a storm, but one wrapped up in wet fabric which will remain damp for days, may absorb enough water to become out of balance or even to open up glue joints to a point where the propeller will fail at high r. p. m.

No Water Collecting

The best propeller cover is one made of waterproof auto top or some such rubberized material, perferably without seams on top, and open from end to end along the lower edge with snap buttons along this edge to safety it. Water cannot possibly collect in this type as it sometimes does in other standard or homemade propeller covers, especially those in which one end is sewed up to slip over one blade of the propeller, while the other end is provided with snaps.

Great care must be taken that no water be allowed to collect about the spinner as it may seep through minute holes or cracks into the interior and open up the glue joints in the hub of the propeller. If sufficient water collects inside a built on wood spinner it will literally blow the spinner apart from centrifugal action at high r. p. m. in some cases.

The last important thing to do is to inspect the extreme ends of the metal tipping and open up the vent holes for draining out oil and moisture that occasionally works out under the metal. There should be at least three 1-32 in. holes provided for this purpose. Failure to see that these drain holes are provided and kept open will usually result in the metal swelling out from the wood and throwing the propeller badly out of balance from centrifugal action, which has been great enough in several instances to strip off the metal tipping, badly damaging both the engine and the plane.

Before remounting the propeller for flight work it is essential that it be balance tested again, no matter how carefully the finish may have been applied. There are many very accurate propeller balancing racks in use about the country but if none of these happen to be available it is quite possible to rig up a home-made balance stand that will be sufficiently accurate to check the propeller before again placing it in service.

Aeronautics Branch Licenses 4,690 Pilots

WASHINGTON, D. C.—There were 4,690 licensed pilots in the United States and territories on January 1, which figure, when increased by those who have been temporarily permitted to pilot planes, shows approximately 5,200 pilots authorized by the Department of Commerce, according to figures compiled by its Aeronautics Branch. Of the 4,690 licensed pilots, 2,927 are transport; 532, limited commercial; 66, industrial, and 1,165, private. Included among the 4,690 were 34 women, of whom two have transport pilot licenses; six, limited commercial licenses; and 26 private licenses.

California led the states in the number of licensed pilots, having 894, followed by New York with 472. The other states which have more than 100 licensed pilots, as of January 1, are Illinois with 280; Michigan, 249; Pennsylvania, 239; Ohio, 228; Texas, 218; Missouri, 178; District of Columbia, 165; Virginia, 117; Massachusetts, 109; and Wisconsin, 101.

In addition to the above, the Commerce Department licensed four pilots intending to fly in Canada, three in New Zealand, two in the Philippines, and one in each of the following: Canal Zone, Egypt, Nicaragua and Paraguay.

Pilots by States

Licensed pilots, according to states, are listed as follows:

Alabama 35, Arizona 13, Arkansas 42, California 894, Colorado 73, Connecticut 44, Delaware 6, Dist. of Col. 165, Florida 75, Georgia 35, Idaho 12, Illinois 280, Indiana 86, Iowa 55, Kansas 94, Kentucky 33, Louisiana 35, Maine 7, Maryland 44, Massachusetts 109, Michigan 249, Minnesota 97, Mississippi 17, Missouri 178, Montana 22, Nebraska 45, Nevada 8, New Hampshire 5, New Jersey 88, New Mexico 4, New York 472, North Carolina 28, North Dakota 7, Ohio 228, Oklahoma 81, Oregon 48, Pennsylvania 239, Rhode Island 7, South Carolina 12, South Dakota 17, Tennessee 59, Texas 218, Utah 29, Vermont 5, Virginia 117, Washington 97, West Virginia 14, Wisconsin 101, Wyoming 27, Alaska 9 and Hawaii 25.

Guardian Control to White

ST. LOUIS, MO.—Derek White has announced his resignation as general manager of the Parks Air College, although he is retaining his interest in the business. According to his announcement, he has purchased the controlling interest in the Guardian Airseater light plane.

Loening Deliveries Made

NEW YORK, N. Y.—Announcement is made by Albert P. Loening, vice president and general manager of the Loening Division of the Keystone Aircraft Corp., that Pan American Airways, Inc., has accepted delivery on two more Keystone-Loening Air Yachts.

Name Lindbergh Technical Adviser of P. A. A. Services

Will Fly First Mail Consignment to Canal Zone In Miami-Cristobal Line Opening

NEW YORK, N. Y.—Col. Charles A. Lindbergh now states that he has been retained as technical adviser by Pan American Airways, Inc., and its affiliated operating companies, and also as consultant to the Aviation Corporation of the Americas, the holding company. The announcement came in an interview granted by Colonel Lindbergh and J. T. Trippe, Pan American firm president, in which it was explained that the Colonel will in the future pass on all matters pertaining to routes, airports, equipment, etc., relating to the Pan American service. It was pointed out that the new duties of the trans-Atlantic flier in no way interfere with his advisory position with Transcontinental Air Transport, Inc.

Pan American Airways planned to institute service between Miami and the Panama Canal Zone on January 11, as stated in the last issue of this magazine, but with the new association of Colonel Lindbergh it was decided to postpone this inauguration until February 4, at which time the Colonel will fly the first consignment of mail over this fourth foreign mail route of P.A.A. It is said a Sikorsky S-38 will be employed in this initial flight.

Interrogated concerning his new connection, the Colonel stated he would work with Pan American "in the hope of bringing inter-communication with the South American Republics closer than is now possible."

Route Outlined

The itinerary of the trip to the Canal is as follows: Miami, Fla.; Havana, Cuba; Belize, British Honduras; Tela, Honduras Corinto, Nicaragua; Managua, Nicaragua; Puenta Arenas, Costa Rica; David, Panama; and Cristobal, Canal Zone.

In his capacity of T. A.T. adviser, Colonel Lindbergh left Mitchel Field, L. I., January 12 to make an inspection tour of the company's transcontinental air-rail route. He flew in the new Ford plane "Columbus," accompanied by Charles Goodfellow of the Curtiss Flying Service, and John Collings, T. A. T. pilot.

Curtiss Service Buys Hartford, Conn., Firm

HARTFORD, CONN.—The newly-formed Curtiss Flying Service of New England, a subsidiary of the Curtiss Flying Service, has bought the interests of the New England Aircraft Co. and its subsidiary, the New England Flying Service, it was learned January 10. The new service has also leased a space at the East Boston Airport and will erect a hangar there soon, and will have the entire management of the Worcester, Mass., airport.

The Curtiss Flying Service of New England will operate from Hartford, Worcester, and Boston, carrying on pilot instruction, air taxi service, sight seeing service, aerial photography, and aerial advertising. The Curtiss Flying Service is now operating from its new field at Bridgeport, Conn. In addition to its regular commercial service, the new company will be distributor for Curtiss, Sikorsky, and Ireland planes.

Stinson Plans Attempt At Endurance Record

DETROIT, MICH.—Eddie Stinson, president, and Randolph G. Page, chief test pilot, of the Stinson Aircraft Corp., will attempt to break the world's record for non-refueling endurance flight during February, it was learned here recently.

The attempt, according to William A. Mara, secretary of the corporation, who confirmed the report, will be made, if possible, either on the ice of Lake St. Clair, near Selfridge Field, or from that of Saginaw Bay. Should weather conditions in Michigan be unsuitable, Stinson will again take off in Florida.

Schedule New York Session

NEW YORK, N. Y.—Mayors of 10 upstate cities will be guests of Mayor Walker in the next session of the New York State Aviation Conference, scheduled to be held in the Aldermanic Chamber, City Hall, February 6.

Guggenheim Fund for Chile

NEW YORK, N. Y.—Believing that South America offers great opportunities for air transport, Daniel Guggenheim, it is reported, has provided a fund of $480,000 for aviation development in Chile where the Guggenheim family has nitrate and copper producing interests. It is said that the offer has been accepted but the terms have not been announced. While Chile will be able to use the fund as it sees fit, it is understood that Mr. Guggenheim hopes an endowed training school will be established. Daniel Guggenheim's gifts for the development of aviation are already said to total more than $3,000,000.

Chapman Airliner Tested at Newark

Burnelli Plane is Powered by Two Geared Conqueror Engines

NEWARK, N. J.—First official test flights of the 20 passenger Chapman airliner were conducted recently at Newark Airport by Lieut. Leigh Wade. This airplane is an all metal, externally braced, monoplane designed and built by Vincent J. Burnelli for P. W. Chapman and owned and operated by Sky Lines, Inc. A series of cross country trips are planned to follow the completition of trial flights.

Four flights were made on the first day of the tests during which Lieut. Wade was assisted by E. F. Stewart. On the first flight the plane took ofl in 440 ft. and in 6 sec. and climbed to 3,000 ft. in 7 min., with engine throttled down. In the second trial flight the plane took off with the two pilots and five passengers in 7 sec. in a run of less than 300 ft. On the third and fourth flights 12 passengers were carried and the plane took off in 9 sec. The landing speed was approximately 50 m.p.h.

Fuselage An Airfoil

The Chapman airliner is an all metal plane of unusual design with a fuselage having a true airfoil section which is said to contribute to the lift of the plane. The wing structure is of the transverse stringer type of construction without ribs and having drag trusses at intervals in the structure. Currugated duralumin sheathing is used for wing and fuselage covering. The plane is powered with two Curtiss Geared Conqueror engines each developing 600 hp. at 2,400 r.p.m. The engines are mounted side by side with radiator between in what might be called the leading edge of the airfoil shape which constitutes the fuselage.

The Chapman airliner has a wing span of 90 ft. and a 14 ft. chord. The overall length is 47 ft. The weight of the plane empty is 8,700 lb. and the useful load 4,000 lb. The estimated high speed is 145 m.p.h. and cruising speed 115 m.p.h.

The cabin which is 18 ft. long by 11 ft. 4 in. wide, is roomy and is furnished with upholstered swivel chairs. In the center of the forward portion is a lounge which is built over the main fuel tank. Abaft the cabin are a toilet room and kitchen. The cabin is insulated against weather and engine noises and is fitted with electric lights and radio receiving equipment. Forward of the cabin and accessible from it or through openings in either side of the fuselage, is the control compartment which is completely equipped and so placed as to afford excellent visibility for both pilots.

To decrease parasite drag, a retractable landing gear is provided. The mechanism for this consists of a system of cables and pulleys which are wound on a drum by means of a crank in the control compartment. Two gasoline tanks of 280 gal. capacity each are built into the wings and the cabin tank has a capcity of 440 gal.

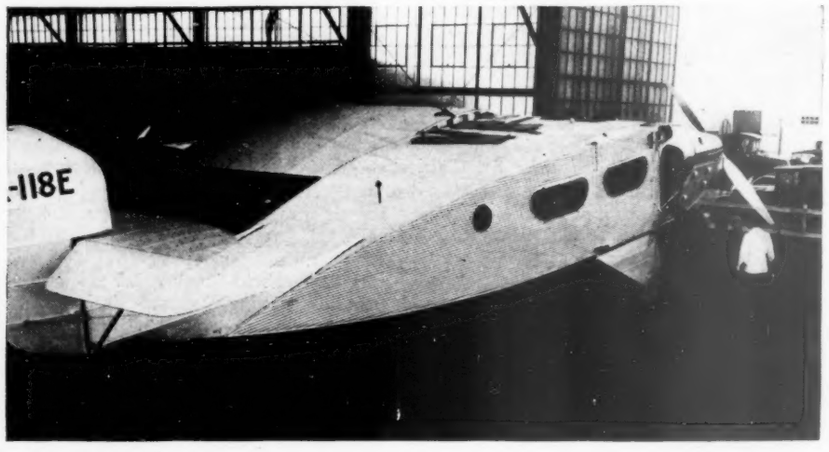

With one wing removed, a view of the airfoil-like fuselage of the twin Curtiss Conqueror powered Burnelli is afforded. Note the construction of the empennage.

Aviation School Seeks Imposter

KANSAS CITY, MO.—A reward of $100 for information leading to the arrest of an impostor who recently victimized a score of prospective flying students in South Carolina and Georgia is offered by Dr. George L. Bennett, director of the Bennett Flying Schools, with main offices at 217 West 14th Street, this city.

Using the name "Capt. James C. Hall," the man whose apprehension is desired is alleged to have absconded with money collected as down payments for tuition in what he called the "Bennett Memorial Flying School."

Named Travel Air Dealer

EUGENE, ORE.—Hobi Airways, this city, has been named Oregon distributor of Travel Air planes, it is announced.

Gates-Day Company Changes Firm Name

PATERSON, N. J.—Official announcement is made that the name of the Gates-Day Aircraft Corp. of this city has been changed to New Standard Aircraft Corp. The firm manufactures the New Standard sesquiplanes.

Changes in personnel were also announced, principal among which was the resignation of Ivan R. Gates as president and member of the board. Ill health was the reason advanced by Mr. Gates for his severance of connection with the company. Charles L. Auger, Jr., and Felix J. Pittit were elected to the board of directors; George H. Daws, secretary and advertising manager with the firm, has been placed in charge of New Standard sales, and G. Wilson England is cooperating in this work. Management of the factory, furthermore, is being undertaken by Charles F. Rupprecht.

Charles Healey Day, chief engineer and designer, stated he would announce plans for a new dual engined transport plane in the early Spring. Meanwhile the New Standard engineering force is working on the specifications and details of the proposed new plane.

Production of the New Standard sesquiplane which is now in units of 10, will be increased to units of 25 when work begins in the corporation's new factory. The new factory which has triple the amount of floor space as the present building was recently purchased for $100,000. Since then the work of installing electric equipment, boilers, and heating equipment has been under way. The corporation's production schedule will start in the new plant about January 20.

Fairchild Export Sales $193,000 in One Week

FARMINGDALE, L. I.—Export sales of airplanes totalling $193,000 in one week are announced by the Fairchild Airplane Manufacturing Corp. of this city. Eight stock Fairchild monoplanes with spare parts and accessories are represented by the figure. They are to be placed in a variety of commercial services in widely differing climates and countries and under diversified conditions.

Three were bought in Canada by the Dominion Explorers, Ltd., two in Mexico by the Compania Mexicana de Aviacion, one in Peru by the Peruvian Airways, Inc., one by Chilean Airways, Inc., and one by Pan American Airways at Costa Rica.

Prize for World Flight

DENVER, COLO.—A $50,000 prize has been offered by the Denver *Post* for the crew of the first airplane to make the first non-stop flight around the world following as closely as possible the 40th parallel, north latitude, and ending and starting at this city. The offer remains good until Jan. 1, 1931, and is open to any pilot in the world.

Whitaker to Organize Szekely Sales Force

HOLLAND, MICH.—John T. Whitaker, who for the last two years has been aeronautical and automotive engineer for the Tide Water Oil Sales Corp., has become vice-president in charge of sales of the O. E. Szekely Aircraft Corp., it has just been announced by officials of the aircraft concern. In his new capacity, Mr. Whitaker will undertake to organize the sales personnel, and will establish a field service organization, as well as distributing agencies for the planes and engines manufactured by his company.

Mr. Whitaker was one of the first American students of Louis Paulham, under whom he learned to fly in California in 1911, and since that time he has been in active contact with the industry. During the war, he served with the special intelligence service of the French Air Corps. His activities since that time include a circuit tour of the United States made by plane in 1927 for the purpose of increasing the interest of the public in aviation and to encourage municipalities in establishing, adequate landing fields. On this trip, he interviewed officials of the Los Angeles *Examiner*, and is said to have been responsible for the starting of a special aviation supplement by the paper, the first of the Hearst group to adopt this scheme. Mr. Whitaker's work with the Tide Water Oil Sales Corp. is equally well-known.

John T. Whitaker

Florida Cities See Dirigible

MIAMI, FLA.—The dirigible Los Angeles which was scheduled to fly over the Miami Municipal Airport as part of the dedication ceremonies held last week, did not make the flight until Sunday, January 13. At that time the ship flew over Miami and a number of Florida cities. Weather regarded as dangerous was the cause of the delay.

Stromberg Production Up

CHICAGO, ILL.—Stromberg carbureters for aircraft are to be manufactured on a large scale, according to C. W. Stiger, president of the concern. This branch of the operations of the Stromberg firm, which did not begin to show a profit until the latter part of 1928, now promises to be at least a third of this year's business. The plant has a capacity of 5,000 carbureters a day and it is expected production will average about 4,200 a day.

New Aviation Finance Concern Is Organized

NEW YORK, N. Y.—Formation of Aviation Business Bureau, Inc., which plans to carry on extensive research work and to offer a confidential weekly service to those interested in aviation finance, has just been announced by Dr. Frederick L. Hoffman, who has been consulting statistician for a large insurance company for the last 30 yr. and is director of research for the new firm.

Dr. Hoffman is known for his research work and statistical investigations, as well as for his interest in aviation. He has made a great number of flights both here and abroad, and is said to have flown 20,000 mi. by plane. In the near future, he contemplates a trip to the West Indies over the routes of Pan American Airways, Inc.

Aside from Dr. Hoffman, the personnel of the new concern includes Col. Harold E. Hartney, Charles H. Payne, Maj. William J. Hammer, Maj. J. B. Lent and John W. Bishop. Mr. Bishop will be in charge of the editorial work for the company and will also handle the sales of service, according to the announcement. Offices are being maintained at 72 Wall Street, New York.

Delivering Command-Aires

LITTLE ROCK, ARK.—Production on 369 planes ordered during the Chicago show is well underway at the Command-Aire plant here. Four OX-5 craft, making the fifth since signing at the show, were recently delivered to the General Aviation Co. at Syracuse, N. Y., the Aviation Service and Transport Co., Chicago, has received its first plane, and another has gone by freight to Northwestern Air-Lines, Inc., Seattle. With seven planes delivered earlier this year, a good 1929 start is reported.

Plane's Accessories Stolen

NORMAL, ILL.—Report of a theft at the Bloomington Airport is made by H. A. Mill, field manager. Left on the airport the night of January 4, a Stearman plane was stripped of two landing lights, two Scintilla magnetos for the J-5 power plant, one compass, several spark plugs, one altimeter, one bank and turn indicator, airspeed indicator, clock, some flares, two flying suits, helmets, and goggles.

TACOMA PUBLIC LIBRARY

Manufacturers Enter Craft in Detroit Show

DETROIT, MICH.—Thirty-seven manufacturers have entered a total of 71 airplanes in the second annual All-American Aircraft Show, to be held here April 6-14, according to the latest announcement of Edward S. Evans, chairman of the show committee, Aircraft Bureau, Detroit Board of Commerce. Space reservations made by accessory manufacturers, the figures show, totalled 63 on January 10.

Following is a list of aircraft entries received up to January 10:

Advance Aircraft Co., Alliance Aircraft Corp., Aeromarine Klemm Corp., Aircraft Development Corp., American Eagle Aircraft Corp., Bellanca Aircraft Corp., Berliner Aircraft Co. Inc., Buhl Aircraft Co., Butler Aircraft Corp., Cessna Aircraft Co., Chance Vought Corp., Cunningham-Hall Aircraft Corp., Curtiss Flying Service of Michigan, Driggs Aircraft Corp., General Aircraft Corp. by its distributor, Wolverine Flying Service, Hamilton Metalplane Co., Invincible Metal Co., Kreider-Reisner Aircraft Co., by Skyways, Inc., E. M. Laird Airplane Co., Lenert Aircraft Co., Mahoney-Ryan Aircraft Corp. by Knapp Flying Service, Metal Aircraft Corp., Mohawk Aircraft Corp., Moth Aircraft Corp., Overcashier Aircraft Corp., Pitcairn Aviation, Inc., R. A. Rearwin Airplane Co., Swallow Airplane Co., Swift Aircraft Corp., Stearman Aircraft Co., by Skyways, Inc., Stinson Aircraft Corp., Stout Metal Airplane Co., Swallow Air-Aircraft Corp., Spartan Aircraft Co., and the Travel Air Manufacturing Co.

Planning Production Of Lycoming Engine

WILLIAMSPORT, PA.—Plans are now under way for production in the near future of an aircraft engine by the Lycoming Manufacturing Co. The first model, which is a nine cylinder, air cooled static radial type, has undergone preliminary tests and soon will be under production and other models will follow. The Lycoming engine was exhibited for the first time at the recent Automobile Show in New York City.

The new engine is a conventional design and is rated at 185 hp. at 1900 r.p.m. It has a bore of 4½ in. and a stroke of 4½ in. giving a piston displacement of 645 cu. in. The overall length of the engine is 37 11-16 in., the overall diameter 43¼ in., the diameter of mounting ring 19¼., and the weight complete 470 lb. A Stromberg carbureter and a dual Scintilla magneto are used.

Places Large Dural Order

MARSHALL, MO.—The Nicholas-Beazley Airplane Co., Inc., this city, has placed an order with the Aluminum Company of America, New Kensington, Pa., for duralumin sheeting sufficient to manufacture 100 planes of the Barling NB-3 type.

Plane Licensing To Be Changed

Special Cards Will be Issued All Owners; Metal Plates to Go

NEW YORK, N. Y.—Adopting a system similar to that employed by some states in the registration of automobiles, the Aeronautics Branch, Department of Commerce, is instituting a new method for licensing aircraft which will be placed in operation within the next two months, according to a statement issued by the Aeronautical Chamber of Commerce.

The system embodies a number of features, which make it highly advantageous and in keeping with the progress of aviation, the statement says. In addition to expediting the licensing of aircraft, all registrations will be more closely controlled as a result of the elaborate cross filing system that is a part of the new method.

New Form to be Issued

Metal plates in the planes will no longer be used. When a number is assigned by the Department, whether it is a license, temporary, experimental or indentification number, a card describing the aircraft will be issued. This will be displayed or carried in the plane. Besides this, the Government will issue a "record, transfer and reassignment" form, which the recorded owner will keep in his possession.

In case the title of the plane is transferred, the vendor, that is, the operating agency, endorses the card carried in the plane, giving his name, the name of the purchaser and the date of the sale. The "bill of sale" portion of the record, transfer and reassignment form is then filled in by the vendor, in this instance the recorded owner, and the form is given to the purchaser, or the newly recorded owner, who completes the portion of the form devoted to reassignment and sees that the operating agency does likewise. Where the operating agency and the recorded owner are the same, this portion of the form need only be signed and dated.

Owners Newly Defined

When the record, transfer and reassignment form is completely filled out, it is forwarded by the purchaser to the Department of Commerce, or it may be placed in the hands of one of the authorized representatives. When this is received, a new card for the plane and a new form, giving the name of the purchaser, will be issued by the Department, but until this is received, the plane cannot be operated.

Under the new system, the recorded owner of a plane is defined as being the individual, company or corporation, which has presented evidence of its legal title to the plane, which is acceptable to the Department. The operating agency is defined as the individual, company or corporation, which is in possession of the aircraft and is entitled to control its operations.

The application forms for registration have been changed and now include spaces for giving additional information required by the Department as a result of the new system. This includes a supplement to be filled in by the operating agency, showing the citizenship of the plane. The other forms are being printed, and the mechanical devices necessary for the multiple copying, which the method entails, are being installed in Washington, the Chamber of Commerce statement says.

Sanction Given Four Big Races

WASHINGTON, D. C.—The National Air Races for this year, to be held at Cleveland August 24 to September 2, is outstanding among the four competitive events which have been sanctioned by the National Aeronautics Association. The staging of the races at Cleveland is dependent upon the raising in that city of $100,000 for prize money. The other three events are the National Balloon Race at Pittsburgh, May 4, the Gardner Cup Race at St. Louis, May 28, 29 and 30; and the Gordon Bennett International Balloon Race at St. Louis, October 1.

Purchase of Supply Concerns Negotiated

COLLEGE POINT, L. I.—Negotiations for the purchase of the Standard Automatic Products Co. of Corry, Pa., and the Johnson Airplane & Supply Co. and National Steel Products Co., both of Dayton, O., have been completed tentatively by the Aero Supply Manufacturing Co., it is reported.

The consummation of these negotiations, expected to be completed some time this month, would bring together under the direction of the local concern a wide range of aeronautical accessories. The interests involved are reported to anticipate no obstacles in the merger plans.

The local concern was organized in New York City seven years ago.

Open Martin Unit

BALTIMORE, MD.—A force of some 250 employes brought from Cleveland are now at work in the new Glenn L. Martin Co. experimental factory here on aircraft designs for the Navy. Regular production, it is said, will not commence until the completion of the main plant, which is expected to be ready within four months.

First Pittsburgh Show Committee Announced

PITTSBURGH, PA.—Virtually every phase of aviation in the tri-state region is represented in the group of men selected to comprise the show committee of the First Annual Pittsburgh Aircraft Show, to be held March 9 to 16, inclusive, in Motor Square Garden, Baum Boulevard and Beatty Street, under auspices of the Aero Club of Pittsburgh.

Members of the show committee, as announced by Raymond A. Tucker, its chariman, include representatives of virtually every airport, aircraft operator, airplane manufacturer, and aircraft accessory manufacturer in the Pittsburgh district. Other organizations represented are the Pittsburgh Chamber of Commerce, the Aero Club of Pittsburgh, the Pittsburgh-Cleveland air mail line, the Pennsylvania National Guard, the Aero Club of Penn-Commission, and the Pittsburgh City-County Air Board.

Headquarters for the aircraft show have been established in the lobby of the William Penn Hotel, with Ray Krimm, show director, in charge. William J. Austin, a pilot at Rodgers Field, has been appointed sales manager for the Pittsburgh exposition.

Consolidated Merges With Two Companies

NEW YORK, N. Y.—Consolidated Instrument Company of America has acquired control of Julien P. Friez & Sons of Baltimore, manufacturer of meteorological instruments, and the Moulded Insulation Co. of Mount Vernon, N. Y., maker of Bakelite parts for precision and meterological instruments.

The merger, one of the largest in the airplane accessory field to date, makes the Consolidated concern one of the largest distributors of aviation instruments in the country. It will handle the entire output of the acquired plants. Negotiations for the acquisiiton ot a third concern are reported to be under way.

Will Test Supercharger

HARTFORD, CONN.—Tests are to be conducted shortly on a special supercharger developed by the Pratt & Whitney engineers, it is announced here. The device is expected to enable a Wasp engine to give sea level horsepower at 20,000 ft. altitude. A Vought Corsair O2U-2 has been loaned by the Navy for the experimental flights.

Schneider Date Announced

NEW YORK, N. Y.—Information has been received here that the Schneider Cup Race is to be held on September 6-7 over the Solent, near Cowes, England. The United States plane, it is said, will be powered by a Packard X 24 cylinder engine.

Universal Buys Continental Line

Say New Acquisition Will Form First Unit of Souuhern Route

NEW YORK, N. Y.—Purchase by his company of Continental Airlines, Inc., operator of the air mail line from Cleveland to Louisville, for an unreported sum has just been announced by Louis H. Piper, president of Universal Aviation Corp.

Acquisition of the Continental line has added an extremely important link to the large system controlled by the Universal corporation, according to the announcement, in that it gives the company a route through one of the largest industrial centers of the country. In addition, it is said that the Continental lines will form the first unit of the proposed "Southern Cross" continental air mail line, which the Post Office Department is planning for Cleveland, Louisville, Nashville, Memphis, Dallas, El Paso and the Pacific Coast.

"Importance is attached to the purchase of Continental Airlines by Universal, because of the increasing interest in a southern air mail and passenger route across the United States, where the weather is less severe and of shorter duration, and schedules are more easily maintained than in the north," the announcement says. "Whatever the rest of the routing may be, the Cleveland and Louisville route will be the first step, and it presents the possibility of tremendous poundage of air mail and larger passenger revenue, because of the territory covered."

Auxiliary Features Planned

The cities on the route covered by Continental Airlines are Cleveland, Akron, Columbus, Dayton, Cincinnati and Louisville. In accord with the policy of the Universal corporation, both passengers and air mail will be carried over the route. Fokker planes of the type ordered for use on the other routes of the Universal system will be used on the new unit. Besides the passenger and mail service, the company plans auxiliary features, such as photography, schools and taxi service.

Announce New Swift Models

WICHITA, KAN.—Production in the near future on a two place sport biplane built around the Warner Scarab engine is announced by the Swift Aircraft Co. of this city. A special OX-5 training plane is also to be manufactured.

Excelsior Plans Monoplane

WICHITA, KAN.—The Excelsior-Henderson Cycle Company of Wichita announces a low wing semi-cantilever monoplane to be turned out here during 1929.

Keep Fragments Of Wright Plane

PITTSFIELD, MASS.—Fragments of the second successful plane built by the Wright brothers, called the first plane to go 10 mi. in a single flight, are lying in the basement of the Museum of Natural History and Arts here, awaiting the attention of the one man, Orville Wright, who can restore them to the semblance of the original frail craft.

For 20 yr., or since the wreckage of the plane was collected at Kitty Hawk Beach and sent to Pittsfield, influential men of the city have been eager to have Orville Wright direct this work.

W. A. E. Reorganizes To Get More Capital

LOS ANGELES, CALIF.—Formal announcement of reorganization of Western Air Express, Inc., under Delaware laws to provided for a larger capitalization and for the division of shares into smaller units, has been made by Harris M. Hanshue, president.

A new corporation has been formed known as Western Air Express Corp. with an authorized capitalization of $5,000,000 divided into 500,000 shares of $10 par value. Directors have authorized the issuance of 25 shares of the new capital stock issue for each share of the old stock, provided a majority of stockholders of the old company consent to the transfer.

Directors and officers named for the new corporation are said to be only temporary and it is intimated that they will be replaced by those of the present Western Air Express, Inc., following completion of the exchange of shares.

Will Build I. F. Engines

NEW YORK, N. Y.—The Italian Isotta-Fraschini aircraft engine is to be manufactured in this country, it is reported by the group headed by Enea Bossi, of the American Aeronautical Corp., which has also undertaken to build the Savoia-Marchetti seaplanes in this country. The engines range from six-in-line air cooled type developing 80 hp. to the powerful water cooled type which in tests has developed 1,200 hp. These engines are widely used in Italian planes and have been installed in many German machines.

Name Skyways Moth Agent

LOWELL, MASS.—Skyways, Inc., of Boston, Portland, Lawrence, and Wareham has been named as the first distributor for the American-made D. H. Moth planes being produced here by the Moth Aircraft Corp. The first plane will be used as a factory demonstrator, while the second and third will go to Skyways.

Many Fliers at Miami Air Meet

Big Dedication Reaches Climax In Opening of Pan American Services

MIAMI, FLA.—Dedication of the Miami Municipal Airport last week was marked by the greatest aerial activity this city has known. Nearly 100 planes, both military and commercial, competed in the All-American Air Meet Exposition held the first two days of the official opening, and on the third day Pan American Airways formally inaugurated its passenger and mail service to the Bahamas and the extended service to the West Indies.

Well over 100 pilots had responded to the invitations sent out asking them to participate in the event, but on the first day there were less than 50 commercial and 20 military planes at the field. The others had been delayed by the bad weather. However, the weather cleared, and on the second day, from 30 to 40 more fliers arrived. This group was headed by Brock and Schlee, who flew in with their Lockheed "Vega" monoplane.

Many Races Held

The air meet was opened both days with an aerial parade over the city, in which both the military and commercial planes participated, and on both days it was followed immediately by various events at the field. These events included races for planes with engines of 50 hp. or less, those powered with engines up to the OX-5 class and those powered with engines of 200 hp. or less; races for cabin and open cockpit planes; races for the Army and Navy machines; balloon bursting contests; dead stick landing contests, and the selection of the plane presenting the neatest appearance. Cash prizes and trophies were presented the winners in each event.

The second day of the meet, Pan American Airways conducted a rehearsal of its service from Miami to Nassau, in the Bahamas. The run between the two cities is 188 mi. and is normally made in two hours; but on this occasion, Harry Rogers piloted one of the "Wasp" powered, Sikorsky "Amphibions" over the route in 1 hr., 50 min. each way. This was the first flight made with passengers. It is interesting to note that the only competition the line will have at present is that offered by an 18 hr. steamer service.

New Lines Opened

The dedication of the Miami Airport was culminated the morning of the third day with the formal inauguration of the Nassau line and the new 1,400 mi. system that includes stops at the principal cities in the countries of the West Indian group. The ceremonies were attended by many notables from the island nations, as well as a number of prominent United States government and aviation officials.

Personnel

ALLEN W. MORTON, who has been connected with the American Hammered Piston Ring Co., Baltimore, Md., for 10 yr., has been named president and general manager of that concern. W. C. Stettinius has resigned from that position but will remain on the board of directors as vice chairman.

A. T. LEBLANC has joined the aircraft division, manufacturers sales department of the Robert Bosch Magneto Co., Inc., Long Island City, N. Y.

JAMES A. BOWERS has been named assistant chief engineer of the Consolidated Instrument Company of America, Inc., New York City.

HERBERT HOOVER, JR., son of the president-elect, has accepted a position with Western Air Express as head of the radio department. His title will be assistant to Harris M. Hanshue, president of the firm, and he will have charge of radio telephone installation on W. A. E. passenger planes.

J. G. NALL of San Francisco and R. G. HAZEN of Dallas, inspectors, have been added to the staff of the Southern California Branch, U. S. Department of Commerce Aviation Division, Los Angeles.

CAPT. ARCHIBALD B. JOHNSON, who is well known for his war time service and his activities in commercial aviation since then, has been appointed sales manager of the Moth Aircraft Corp., it has just been announced. WILLIAM R. OSTERTAG, graduate of the U. S. Naval Academy of the class of 1924 and graduate of the U. S. Marine Corps Reserve training course, has joined the sales staff of the company, it is announced also. Headquarters of the aircraft company are maintained in the Graybar Building, New York.

F. L. BARCHARD, builder and owner of the Pal-Waukee Airport near Chicago, Ill., and formerly the Swallow dealer in the Chicago district, has become sales manager for the Swallow Airplane Manufacturing Co., one of the oldest and best known aircraft manufacturers in the country.

COL. HALSEY DUNWOODIE, vice president of Gardner Motor Car Co. and executive vice president of Universal Aviation Corp., COL. CEDRIC FAUNTLEROY, New York banker, and WALTER W. HEAD, Omaha financier, were recently elected directors of Universal Air Lines System, according to an announcement made by L. H. Piper, president of the Universal organization.

JAMES COOPER and KENNETH RODGERS, former students of the Rankin aviation school, Portland, Ore., are taking over the ground school instruction at the Eyerly Aeronautical School, Salem, Ore., it has been learned. A new class room and office building have been erected at the school, which was operated formerly under the name of Pacific Airplane Service, and night classes are now a regular feature. W. A. Hazelwood is the chief pilot.

ARTHUR SNOWDEN, who has been a member of the New York sales force of Detroit Steel Products Co., manufacturer of hangar doors and steel window frames, has been promoted to the position of aviation sales director, according to an announcement made by officials of the firm. Mr. Snowden is an experienced pilot and was formerly engineering officer at Miller Field, Staten Island, N. Y.

GEORGE PARKER of Berkeley, Calif., has joined the staff of Metro Air Service, according to an announcement by Lieut. Franklin Rose. The Metro organization is operating at the Oakland Municipal Airport.

CAPT. IENAR ELM, former Army pilot, has joined with MAJ. LIVINGSTON IRVING and will conduct the ground school classes offered by the Irving and Rhodes Flying Service, according to a recent announcement. This service operates from the Oakland Municipal Airport, Oakland, Calif.

R. D. ELLIS, formerly airport manager at the Robbinsdale Airport near Minneapolis, and R. W. JACKSON, former automobile dealer of the same city, have joined the sales staff of the Mohawk Aircraft Corp.

MARK M. MCCOMB, formerly with the Hamilton Metalplane Co. of Milwaukee, has been named field representative for the Mahowk company. Mr. McComb will have complete charge of dealers' organizations in the Wisconsin territory. He will establish headquarters in Milwaukee.

ROGER SCHUPP, former secretary for the Louisville, Ky., Board of Park Commisioners and more recently acting secretary of the Louisville and Jefferson County Air Board, was elected the secretary of the air board at its last meeting, it has been learned.

A. J. EDWARDS, formerly of the Ryan Aircraft, Corp., has become the general manager of the Swift Aircraft Corp., Wichita, Kan., according to a report.

Trade Tips

It Has Been Reported That—

—The city commissioners of Amarillo, Tex., are taking bids on construction of a hangar at the local airport.

—A. Gilhaus, 36th Street, Hialeah, Fla., is taking bids for erection of a hangar for Pan American Airways, Inc.

—Construction of an assembly shed, one-story, 40 by 60 ft., at 320 West Front Street is planned by the Boeing company, Georgetown Station, Seattle, Wash.

—Contract for hangars at the Seattle airport is soon to be let by the King County Commissioners. Improvements to cost about $150,000 are planned.

—The Arkansas Airplane Cotton Dusting Co., Inc., of Pine Bluff, Ark., will erect a hangar to accommodate 12 planes and a machine shop equipped for full aircraft repair work. Operation of eight planes is planned.

—C. R. Wassell, 1221 South Grand Boulevard, St. Louis, Mo., of the Missouri National Guard, will soon let the contract for construction of an 80 by 100 ft. and a 100 by 100 ft. hangar and also an 85 by 125 ft. administration building at the Lambert-St. Louis Flying Field. The cost is put at about $80,000.

—State Aviation Commissioner Knox of Connecticut stated in his first report to Gov. John H. Trumbull that "the effectiveness of the state aviation department in maintaining proper control of planes will dwindle to practically zero" without additional equipment in the form of a state-owned airplane.

—A company may be formed by the citizens of Greenville, Pa., for the purpose of constructing a $50,000 airport there. If the plan is carried out, approximately $20,000 will be spent in the purchase of land, while $30,000 will be used in buying equipment as it is needed. F. A. Conner, president of the Chamber of Commerce, is the author of the plan to form the organization.

Approved Airplanes Total 95

WASHINGTON, D. C.—With certificates lately granted to 12 new models, the total of approved type airplanes now reaches 95, according to the Aeronautics Branch. Approved planes, 84 through 95, are as follows:

No. 84—Consolidated Model 14, two place open land biplane, Scarab engine; No. 85—Hamilton H-45 eight place closed land monoplane, Wasp engine; No. 86—Laird LC-B, three place open land biplane, Whirlwind; No. 87—Ford 4-AT, 14 place closed land monoplane, three Whirlwinds; No. 88—Kreider-Reisner C-4, three place open land biplane, Comet; No. 89—Fairchild 71, seven lace closed convertible land or sea monoplane, Wasp; No. 90—Loening C2-C, six place closed amphibian biplane, Cyclone; No. 91—Loening C2-H, six place closed amphibian biplane, Hornet; No. 92—Pitcairn PA-6, single lace open land biplane, Whirlwind; No. 93—Lockheed Vega, five place closed land monoplane, Wasp—No. 94—Hamilton H-47, eight place closed land monoplane, Hornet; and No. 95—Mohawk Pinto, two place open land monoplane, Velie M-5.

AIRPORTS AND AIRLINES

Newark-Atlantic City Air Service Planned

LAKEHURST, N. J.—Inauguration of a passenger service, ultimately operating on an hourly schedule, between Newark and Atlantic City with Lakehurst as an intermediate stop is planned by Great Eastern Airways, Inc. William H. Mallon Co., Inc., Asbury Park engineering firm, will build the Lakehurst Airport.

A two hour schedule is to be maintained at first, but it is planned to place five cabin planes in service on the new line, which will permit the institution of the hourly schedule during the day. No night service is planned. The airline distance from Newark to Atlantic City is 120 mi. With the intermediate stops, the run will be made in an hour and one-half. The fare charged, it is said, will be based on a rate of about 20c a mile.

Great Eastern Airways, Inc., which was recently organized, is incorporated under the laws of the State of Delaware with a capitalization of $100,000. In addition to the operation of the airline, the firm is taking over the operation of the Lakehurst Airport. A new hangar measuring 60 x 80 ft. is to be erected, and overhaul and repair shops will be maintained there. The company plans also to inaugurate a taxi and photographic service.

Installation Reported Of 250 "Aerovanes"

NEW YORK, N. Y.—Within the last four months, 250 "Aerovanes" have been erected in New York, New Jersey, Pennsylvania and North Carolina, it has just been announced by E. C. Learock, sales manager for Aerovane Utilities Corp., manufacturer of the Aerovane marker.

The company is adding other models to its line, and contemplates the erection of at least 5,000 more markers this year. The new models are of all-steel construction and carry town marking arrows from 30 to 100 ft. in length bearing letters of from six to 15 ft. in height. Some of these will be illuminated.

The sales force of the firm, it is declared, will be functioning nationally by February. Special manuals regarding the Aerovane are being completed for sales work.

May Lease Buffalo Sites

BUFFALO, N. Y.—Corporation Council Gregory U. Harmon has ruled that land may be leased by the city to private corporations wishing to construct hangars or other buildings at the Buffalo airport. Hangars and other structures are requested at the Buffalo airport by the Gray Goose Lines of Chicago, Airport Director N. E. Duffy states.

Mails at Newark Soon

NEWARK, N. J.—Air mail will be handled at the metropolitan airport here instead of at Hadley Field, the old terminal, beginning some time during the first 10 days of February, it was announced recently by Assistant Postmaster General Glover. Insufficient lighting facilities and runways have delayed opening the new field. The companies to operate from here are the Colonial planes to Boston and Montreal, National Air Transport to Chicago and Pitcairn Aviation to Atlanta and Miami. James W. Costello, city chief engineer, is supervising the improvements.

Boeing Firm Reports Traffic and Mileage

SAN FRANCISCO, CALIF.—Boeing services, it is reported, completed a total of 3,335,973 mi. of flying as the year closed. Boeing Air Transport, inaugurated July 1, 1927, and Pacific Air Transport, which came under the Boeing system Jan. 1, 1928, accrued this mileage while transporting 1,413,586 lb. of mail.

Passengers totaling 3,907 were carried over 2,143,777 passenger miles. Several tons of air express were transported under contract with the American Rail way Express Co. W. G. Herron, vice president in charge of traffic, issued the report and said that he expects an enormous increase during the present year.

Totals for 1928 on Boeing Air Transport, San Francisco & Oakland-Chicago route are: miles flown 2,178,365; mail carried, 986,279 lb.; passengers carried, 1863; passenger miles flown, 1,279,778. Totals for 1928 on Pacific Air Transport, Seattle-Los Angeles are: miles flown, 703,542; mail carried, 137,972 lb.; passengers carried, 1484; passenger miles flown, 506,509.

Winter Activity at Duluth

DULUTH, MINN.—The Great Lakes Airways will carry on activity during the remainder of the winter from Lake Superior and St. Louis Bay, which have frozen solid enough to be used with safety. R. J. Sergent, the chief pilot, has mentioned that skis will be ready to use as soon as there is too much snow to operate with wheels.

Sikorsky Cruise Ends

JACKSONVILLE, FLA.—The cruise of J. M. Patterson's "Amphibion" Liberty ended here January 10, having concluded a long trip through the Carribean. Lieut. Frederick H. Becker piloted the plane, which took off from Miami on December 7.

December Mails Show New Gains

Surpass November and October Marks as Total Goes to 537,113 Lb.

WASHINGTON, D. C.—During December, 1928, the United States air mail services carried 537,113 lb. of mail as compared with 165,768 lb. during December, 1927, and 39,350 lb. for that month in 1926, according to figures made public by postal authorities. The increase in December, 1928, over November, 1928, amounted to 112,648 lb., or 26.5 per cent. An increase of 69,691 lb. over the October total was also noted.

Some 30,544 mi. of flying is scheduled daily over the 22 mail routes now in operation. Poundage figures according to run, November total, and December total, respectively, follow:

Boston-New York, 6,993, 8,344; Chicago-St. Louis, 6,923, 7,185; Chicago-Dallas, 25,769, 29,813; Salt Lake-Los Angeles, 43,066; 65,624; Salt Lake-Pasco, 16,544, 20,238; Seattle-Los Angeles, 15,467, 20,267; Chicago-Minneapolis, 8,875, 14,003; Cleveland-Pittsburgh, 12,126, 11,962; Cheyenne-Pueblo, 6,766, 9,099; Cleveland-Louisville, 6,248, 6,262; New York-Chicago, 105,293, 126,179; Chicago-San Francisco, 112,187, 142,897; New York-Atlanta, 16,688, 20,906; Albany-Cleveland, 10,225, 7,679; Dallas-Galveston, 3,267, 3,846; Dallas-Laredo, 5,614, 6,736; Atlanta-New Orleans, 4,096, 4,352; Chicago-Cincinnati, 4,910, 5,286; Atlanta-Miami, 0, 5,841 (newly opened); Great Falls-Salt Lake, 4,165, 5,121; Chicago-Bay City, 8,829, 8,694; and Chicago-Atlanta, 1,076, 7,779.

It may be noted that increases over November were shown on every route but three—the Cleveland-Pittsburgh, Albany-Cleveland, and Chicago-Bay City runs.

Plan Greenville Field Firm

GREENVILLE, PA.—Plans for the formation of a $50,000 company, for the purpose of building and operating an airport here, were outlined by F. A. Conner, president of the local chamber of commerce, at a recent meeting held in the Penn High School. According to the plan, $20,000 in common stock would be issued to provide for the purchase of the land, while the remaining $30,000 in stock would be sold to raise money needed for the development of the field. Unless the common stock is subscribed by April 1, however, the plan probably will be abandoned, Mr. Conner told the prospective backers.

Bid on Air Mail Line to Mexico

To Award 10 yr. Contract for Brownsville-Vera Cruz Service

WASHINGTON, D. C.—Announcement has been made that the office of the Second Assistant Postmaster General will receive sealed bids until 12 Noon, January 26, for the carrying of United States mail under a 10 yr. contract over the proposed air mail route from Brownsville, Tex., to Vera Cruz, Mexico. The service is to be inaugurated not later than six months after the award of the contract.

While it is understood that the international exchange point will be shifted from Laredo, Tex., to Brownsville, and that the route from New Orleans to Houston may be extended to that city, the Post Office Department is reserving the right to designate any other point in Texas as the Northern terminus of the line. Vera Cruz has not been definitely established as the southern terminus either.

Terminal Undetermined

The line may terminate at Vera Cruz, Mexico City, or "such other points in Mexico as may be acceptable to the Mexican Government," the announcement says. In addition, the Postmaster General is reserving the right to extend the route by way of Vera Cruz, Puerto Mexico and Tuitla Cutierrez to any of the Central American countries, if it should be desired later on. Stops will be made in those countries at points acceptable to the individual governments.

The proposed service to Mexico will be maintained over the shortest practicable airway for land planes, one way, seven times a week. The maximum load, which will be required, will not exceed 800 lb. per trip. In submitting proposals, the bidders must send in statements showing to the satisfaction of the Postmaster General that they can meet the requirements of the Mexican Government concerning the transport of mails by air to Mexico. The bidders must also state the rate per mile of outbound flights on the route and the approximate mileage, subject to a correction of 500 mi. A bond of $25,000 will be required with each bid.

Facilities Not Provided

The contractor must maintain his own arrangements for landing fields, lighting equipment, radio stations and any other aids that may be necessary for the proper maintenance of the service, the announcement provides. No compensation will be granted for any trips that are not made, although on a partially completed trip, pro rata pay will be allowed for the airline distance if there is no delay in the mails over the ordinary railroad or ship service. Instructions to bidders, blank forms for the proposal and accompanying bond may be obtained from the Second Assistant Postmaster General, Division of International Postal Service, Washington.

Oregon's Bonds Declared Valid

SALEM, ORE.—Oregon cities which have voted bonds for the establishment of municipal airports are within their rights, according to a decision of the state supreme court. The opinion holds an airport, owned by a city and open to the use of all airplanes as a community, is for the benefit of the city as a community and not to any individuals. Legality of a $50,000 bond issue in Salem and $25,000 in Roseburg for airports had been challenged.

New Flagging System At Los Angeles Field

LOS ANGELES, CALIF.—A new flagging system has been inaugurated at the Los Angeles field of the Aero Corporation of Calif. in order that plane traffic in and out of the field may be effectively controlled from the ground.

Display of a red flag forbids landings, white flag signifies that the field is clear, and if a green flag is displayed it means the party signalled is to land at once. Flags are controlled by a field attendant who is permanently stationed at the head of the runway where he controls signals and does all checking of planes in and out of the field.

Braniff Plans New Line

OKLAHOMA CITY, OKLA.—Paul R. Braniff, operating the Braniff Air Lines, has announced his intention of opening a passenger line between this city and Dallas, Tex. Fokker monoplanes, it is said, are to be used in the service, which is to start on delivery of the planes. Mr. Braniff recently added a new Travel Air six passenger plane to the Oklahoma-Tulsa line and has placed orders for two more to be used on the same route. The company, furthermore, contemplates a flying school here.

Knoll Plane to Make Tour

WICHITA, KAN.—The six place Knoll plane, recently completed and successfully tested, shortly is to be taken on a tour of the country by Howard Jones, chief test pilot of the company, it is announced. Capt. Richard Duncan, newly associated with the firm as representative, will accompany Jones.

Record Field Revenue Announced at Oakland

OAKLAND, CALIF. — Ten times greater revenue accrued to the city for the operation of the Oakland municipal field during the month of December, 1928, than was received for the same period in the previous year, according to the board of port commissioners' report.

The gross revenue last month totalled $4,571.30, it is said, while revenue in December, 1927, was but $456. The month's revenue also represented a new record for the field, since the greatest amount previous received was $4,004.16, the October gross.

New commercial operators at the airport and a greater number of visiting planes are responsible for the increased revenue, it was said. Passengers and students carried at the airport tripled in number during December, as compared with the same month of 1927. Last month 2,203 passengers were carried and 428 student flights were made. During December, 1927, 790 passengers and students were carried.

Plane landings recorded at the airport in December totaled 3,961, while the figure for December, 1927, was 2,056. During the year 1928, 66,432 plane landings were recorded at Oakland municipal airport, 40,691 passengers were carried, 8,297 student flights were made and the gross revenue totaled $30,794.34. Transient plane landings at the airport during the year totaled 3,443. Passengers carried in transient planes totaled 4,732.

Buffalo Airport Will Have Improvement

BUFFALO, N. Y.—The common council has voted to expend between $400,000 and $500,000 to make Buffalo's airport one of the best in the country. Bids were asked immediately for the erection of two hangars, the construction of five more runways, the installation of a railway switch, the grading and seeding of the airport area to put the entire port in flying condition, additional office space, and the construction of a control tower atop the administration building, in order to supervise air traffic fully both day and night.

Allotment of hangar space for from two to five airplanes was made to the United States Army Air Corps Reserve at the yearly rental of $1. Bids were to be opened January 18. It is expected all improvements will be made by summer.

Airports Planned by 14 Cities

WASHINGTON, D. C.—Fourteen more cities have announced plans for municipal airports, according to the Aeronautics Branch. They are: Montgomery, Ala.; Newhall, Calif.; Gainesville, Fla.; Melbourne, Fla.; Jay, N. Y.; Ada, Okla.; Pawnee, Okla.; Erie, Pa.; Denton, Tex.; Saint Jo, Tex.; Buena Vista, Va.; Chilhowie, Va.; Pullman, Wash.; and Shelton, Wash.

Air Station Kite Wires a Menace

WASHINGTON, D. C.—A special warning to pilots of the danger existing in the vicinity of the Upper Air Stations as a result of the piano wire holding the captive balloons and kites used in making daily observations, has been issued by the Aeronautics Branch, Department of Commerce.

The kites and balloons at times reach altitudes well over 10,000 ft., and have been sent up as high as four and one-half miles. In clear weather, they are clearly discernible, but are usually hidden from view in cloudy weather. However, the wire is extremely difficult to see from any great distance. Pilots are warned to keep a sharp lookout when operating within a 10 mi. radius of the stations at Broken Arrow, Okla.; Due West, S. C.; Ellendale, N. D.; Groesbeck, Tex.; and Royal Center, Ind.

Army's Clover Field Station to Long Beach

LONG BEACH, CALIF.—Recommendation of the Commanding General, Ninth Corps Area, to move the air corps reserve activities from Clover Field, Santa Monica, to this city has been approved by the War Department. Long Beach has offered the use of a strip of ground 150 by 450 ft. on the new airport for the erection of hangars and other necessary buildings and has also agreed to move the air corps structures from Clover Field.

In addition, the city will erect suitable buildings for use as a headquarters and flight surgeon's office together with a club building for transient officers. The move is to be made sometime prior to July 1.

Air Board for Duluth

DULUTH, MINN.—The local chamber of commerce has announced through its president, Donald S. Holmes, that an air board has been appointed. The 11 men chosen will work under the direction of C. E. Foster, a consulting engineer, who has been selected chairman and all are to serve without pay for the best interests of the city. The problem is to hasten the selection, acquisition, and development of a site suitable for a municipal airport.

Newark is Entry Point

NEWARK, N. J.—The metropolitan airport here has been designated by the Treasury Department as an airport of entry in the New York district.

Colonial Makes Mail Record

NEW YORK, N. Y.—A new air mail record was established by Colonial Air Transport for the month of December when 8,312 lb. of mail were carried over the New York-Boston run. This is an increase of 820 lb. over the previous record for the line made in October and an increase of 1,329 lb. over November. The line carried 1,999 lb. of mail during December, 1927, and 1,057 lb. in the same month of 1926.

To Increase Weather Information at Buffalo

BUFFALO, N. Y.—Word received here by James H. Spencer, meteorologist of the Buffalo Weather Bureau, stated that there will be an improvement of the weather report service at the Buffalo airport and along the Cleveland-Albany airmail route. Officials of the weather bureau of the Department of Commerce at Washington will arrive here about the middle of January for the purpose of arranging an extension of the weather report service.

Establishment of branch stations at Dunkirk, under Mr. Spencer's jurisdiction, and one at Ashtabula, under the Cleveland meteorologist office are contemplated.

The Buffalo airport at the present time is receiving special weather reports from Albany, Little Falls, Syracuse, Rochester, Erie and Cleveland besides numerous reports at 8:00 A. M. daily, covering all routes out of Buffalo. Zone forecasts are also furnished, covering the lake region and North Atlantic states.

Stamped Government Envelope is Available

WASHINGTON, D. C.—Known as the Government No. 13, a new air mail stamped envelope has been brought out. The borders of the envelope are encircled with red, white and blue parallelograms. The special embossed stamp impression on this new piece is circular in shape and shows a monoplane in flight outlined in white and printed in blue ink with the words "U. S. Postage—Via Air Mail" encircling the border. A large numberal 5c appears in white in a field of blue directly beneath the plane.

This envelope is issued to meet the ever-increasing demand for air mail dispatches and it is estimated that approximately 100,000,000 will be issued during the present calendar year. Postmasters have been instructed to receive orders, and they will be printed and delivered as fast as production will permit. This envelope will also be available in a No. 5 and 8 size at an early date.

Palm Beach Airport Now Open

WEST PALM BEACH, FLA.—Palm Beach Airport is now open, it has just been announced by Waldo E. Thompson, manager of Palm Beach Flying Service.

Announces Air Customs Rules

Regulations of United States Will Go into Effect On February 1

WASHINGTON, D. C.—Supervision of entry of merchandise into this country by air will take its place beside that of shipments by water and land when the Customs Bureau of the Treasury Department puts into effect February 1 the first aircraft customs regulations promulgated in this country.

It is provided that aircraft arriving from a foreign country must make the first landing only at an official airport of entry, except in case of a forced landing or unless special permission is obtained from the commissioner of customs. The person in charge of the plane shall report his arrival immediately to the customs officer and shall produce a manifest, signed under oath by him and certified by the person in charge at the airport of departure, describing the baggage or freight carried or the nature of repairs done to the plane while in a foreign country, in the case of an American plane. The plane must not depart after the landing or discharge its cargo without permission of the customs officer.

Rule on Forced Landings

In case of a forced landing, the person in charge is not allowed to remove any baggage or merchandise or allow any passengers to leave the plane, except for the sake of safety or preservation, until a customs officer has been notified and permission obtained from him. Mail may be removed at once but must be delivered directly to a responsible postal employee.

If the plane is able to proceed after repairs or servicing, it should be flown to the original destination and a full report of the incident made. If it is impossible to proceed, the report should be made as soon as possible to the nearest customs authority. If the person in charge is disabled, the owner of the aircraft, mechanic or other employee must make the report.

The flight of a plane from a foreign point to an airport of entry on a trip that is not scheduled must be reported to the customs officials at the destination before the flight stars and in time to allow the officials to meet the plane. The markings on the plane and the name of the person in charge charge must be included in this information to assist in the identification of the plane when it arrives.

Vehicle Laws Apply

The second administrative provisions of the customs laws applicable to vehicles arriving from contiguous foreign territory shall apply to aircraft and the baggage, merchandise and passengers carried therein. Administrative laws applicable solely to vessels, however, do not apply.

FOREIGN ACTIVITIES

New Plane Built By Hawker Firm

Jupiter Powered Craft Has Metal Wings and Fuselage Frames

KINGSTON ON THAMES, ENGLAND—The Hawker "Hawfinch" is a biplane with an all metal frame embodying the type of construction devised by the Hawker Engineering Co., Ltd., of this city. The general lay-out of the machine is conventional, though the form of cowling used on the Bristol Jupiter air cooled radial engine, which leaves only the extreme cylinder heads exposed, is worthy of note. Either the Bristol Jupiter Series VI air cooled engine of 480 hp. or the Series VII supercharged engine of the same make may be fitted.

The "Hawfinch" has a span of 33 ft. 6 in., length of 24 ft. 4 in., and has 295 sq. ft. wing surface. The empty weight stripped is 1,835 lb. The total load is 900 lb., giving a loaded weight of 2,735 lb., a wing loading of 9.3 lb. per sq. ft., and a power loading of 5.8 lb. per hp.

High Service Ceiling

With the unsupercharged engine the machine climbs to 3,000 m. (9,840 ft.) in 5½ min. and to 6,000 m. (19,680 ft.) in 16 min. and attains a speed of 159 m.p.h. at 9,840 ft., 149 m.p.h. at 19,680 ft and has a service ceiling of 27,000 ft. With the supercharged engine 9,840 ft. is reached in 4.7 min., 19,680 ft. in 11.8 min., with speeds of 171 m.p.h. and 165 m.p.h. at these heights. The service ceiling is then 30,000 ft.

The "Hawfinch may be equipped with a twin float seaplane undercarriage employing duralumin "Vee" bottomed floats, and stainless steel undercarriage fittings. This adds about 300 lb. to the weight and naturally reduces both climb and speed. The machine will nevertheless reach 153 m.p.h. unsupercharged and 165 m.p.h. supercharged at 9,840 ft. and climb to 19,680 ft. in 20 and in 13.2 min. respectively.

Uses Ball-Ended Struts

The fuselage is constructed of steel tubing. Longerons are solid-drawn circular tubes, which are flattened by a rolling process at every strut joint. The two side frames each form an independently assembled unit, tubular struts also with flattened ends being attached to the longerons by flat steel flitch-plates. These plates are secured to the longerons by a single bolt with a cup head. The side struts are riveted to the flitch plates. The two side frames are assembled to form the complete frame with ball-ended struts, which fit into the cup-head bolts, and wire cross-bracing. The whole frame is a simple production job, which can be dissembled and packed as two flat girders for transport.

The wings are built on spars of solid drawn tubes, rolled to what is known as the "double-eight" section. Though this type of spar is slightly heavier than certain other types of metal spar, it is cheap, presents no difficulties in regard to the attachment of fittings, and is remarkably robust. Drag struts are of steel and ribs of aluminum alloy.

The undercarriage, of the cross-axle type, has rubber in compression plus an oil dashpot and provides a very long travel.

Military equipment comprises the usual two .303 calibre machine guns with Constantinescu synchronizing gear, 1,200 rounds of ammunition, oxygen-apparatus, sending and receiving short wave wireless, and a full equipment of flying and engine instruments. The fuel capacity is 54 Imperial (65 U. S. gal.)

European Fares Reduced

BERLIN, GERMANY.—A reduction of about 10 per cent. in round trip fares on airlines in 11 European countries, making the cost by plane less than for first class passage on international express trains, has been approved at a recent conference of operating companies at Berlin. The change was based on the results of last year's business.

Hinkler Gets Medal

LONDON, ENGLAND—Bert Hinkler, British pilot who flew from England to Australia, 16,000 mi., last year in an Avro Avian in 15½ days, has been awarded the 1928 gold medal of the Federation Aeronautique Internationale and the Royal Air Force Cross in recognition of his feat.

Bleriot Building Flying Boat

PARIS, FRANCE.—It is reported that Bleroit works are now building a transocean flying boat with a span of 91 ft., an overall length of 52 ft., equipped with four engines developing a total of 3,200 hp. and capable of carrying 30 passengers. A flight across the Atlantic is planed after a series of tests in the spring over Asia and Africa under supervision of Bleriot's son.

Would Circle Continent

MEXICO CITY, MEXICO—A flight around South America, including the first rounding of Cape Horn by an airplane, is proposed by Lieut. Col. Roberto Fierro, Mexican pilot who has made a non-stop flight from Lower California to this city and later a good will tour to Havana and Central American republics. He expects to start as soon as funds for the project have been received.

Peruvian Fliers Halted

NATAL, BRAZIL—As we go to press the Peru-to-New York fliers, Carlos Martinez de Pinillos and Naval Lieut. Carlos Zegarra, are here waiting for further information about landing conditions at Belem, their next objective, before continuing their flight. They took off from Lima, Peru, December 11 and had hoped to reach New York City by January 15.

To Open Canada Mail Line

SAINT JOHN, NEW BRUNSWICK—Air mail service between Ottawa, Montreal, Saint John, and Halifax will be opened on January 28, according to Hon. P. J. Veniot, postmaster general. Daily Ottawa-Montreal and Saint John-Halifax service is planned, with the Montreal-Saint John link bi-weekly initially.

The Bristol Jupiter powered Hawker "Hawfinch."

THE BUYER'S LOG BOOK

South Bend Lathe

ONE OF the most recent additions to the products manufactured by the South Bend Lathe Works, 404 East Madison St., South Bend., Ind., is the Nine Inch Junior Back Geared Screw Cutting Precision Lathe. This machine is made in five lengths of bed and is available in bench or floor leg models with counter shaft drive or any one of four styles of motor drive. Mechanical parts of all models are identical. This lathe may be used in machining all kinds of metal and in working wood, hard rubber, fibre and other composition materials.

The semi steel lathe bed is a heavy gray iron casting containing about 18 per cent. steel. Beds are rough planed, then seasoned for a period of four to six weeks and then finished planed and hand scraped to insure accuracy. The headstock is back geared and the three step cone permits six spindle speeds. All gears are covered with guards. A quick acting bull gear clamp permits changing from direct cone drive to back geared drive or vice versa without the use of a wrench. The headstock spindle is made of special quality carbon spindle steel and is finished ground all over. It has a ¾ in. hole which permits rods, bars and tubing to be passed through it and held in a lathe chuck or draw-in collet chuck for machining. Phosphor bronze bearings, adjustable for wear, are used in mounting the headstock spindle.

The carriage is strong and deep with a wide bridge capable of supporting a heavy cut and the cross feed is fitted with a micrometer collar graduated in thousandths of an inch. The apron is provided with a pair of half-nuts which are fitted and hand scraped and held by gibs. The power longitudinal feed is obtained by clamping these half-nuts on the lead screw. This feed has ample power

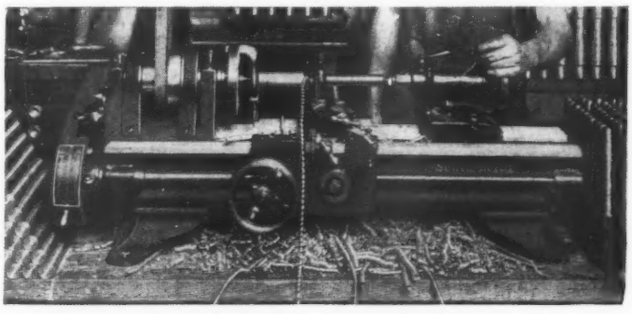

The Nine Inch Junior South Bend Lathe.

as it is operated by the feed gears at the head end of the lead screw.

The compound rest is graduated to 180 deg. on the base and the feed screw is fitted with a micrometer collar graduated in thousandths of an inch. The lead screw is a precision screw with an Acme Standard thread and made of special steel. A heavy and rigid tailstock is provided with a long bearing surface on the bed. The longitudinal power feed has a range of fine to coarse feeds which are adjusted by the aid of the change gears which are attached to the head end of the lead screw. This feed can be operated to make the carriage travel either right or left.

Standard screw threads from 4 to 40 per in. including 11½ pipe thread, right or left hand, can be cut. A number of attachments for this lathe are offered.

Elgin Tachometer

THE ELGIN chronometric tachometer offered by the Tachometer Division of the Elgin National Watch Co., 35 East Wacker Drive, Chicago, Ill., indicates directly in r.p.m. the speed of any rotating member. This speed may be carried to the tachometer through a flexible shaft or by an adaptor; the latter being the case when the tachometer is used portably.

The driving mechanism takes the power from the flexible shaft, or adaptor, transmitting it to the power plant. The power plant furnishes the power for driving the watch mechanism, the counting mechanism and the synchronizing cams. The watch mechanism times the

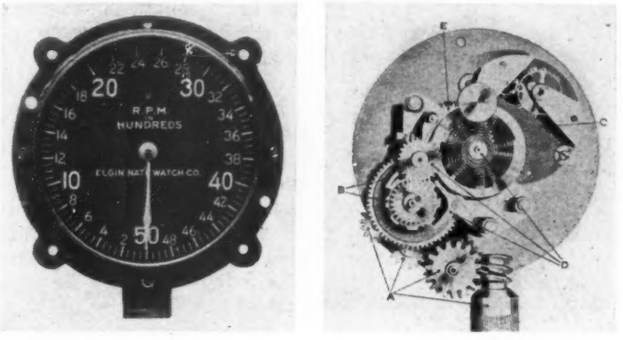

The Elgin chronometric tachometer. Photo with top plate removed (right) shows: A—Driving mechanism; B—Power plant and synchronizing cams; C—Watch mechanism; D—Counting mechanism; E—Intermediate unit.

action of the synchronizing cams, while the counting mechanism counts the revolutions transmitted to it during periods of one second each, and indicates the result on the dial.

According to the manufacturer, the Elgin chronometric tachometer is positively gear driven, is not influenced by external forces, is dead beat, indicates accurately in both directions of rotation, and is of unalterable calibration.

"Oil-Chek" Piston Ring

THE SIMPLEX Piston Ring Company of America, Inc., Cleveland, O., has recently perfected and introduced the new Simplex "Oil-Check" piston ring. This ring functions under the check-valve principle and serves as a positive means of oil control.

This new type piston ring is not a substitute for the regular Simplex piston ring but is an addition, designed for a specific purpose—to stop oil pumping only in motors in which piston clearances do not exceed .0015 in. per inch of diameter. The Oil-Chek piston ring is also suitable for use in new engines.

Like the regular Simplex piston ring, this new Oil-Chek ring embodies the now familiar patented principle of up-and-down expansion in the ring groove and the ability to mold itself to cylinder wall irregularities. One Oil-Chek ring per cylinder is sufficient—always installed in the groove just above the wrist pin. It can be used wherever any regular piston ring is used by simply removing the old piston ring and slipping on the Oil-Chek.

Aerovanes

A COMBINATION airway and highway marker has been developed by the Aerovane Utilities Corp., 292 Madison Ave., New York City. These products are now being installed by many air minded towns and cities.

The "Aerovane" is erected in clear, open spaces, right off the main automobile highways leading to municipalities. It is of all steel construction. The structural steel mounting pole is 30 ft. in height. Anchored to the top of this pole is a red windsock, 5 ft. long, which gives the aviator his ground wind direction. Seven feet below the windsock, centered on a horizontal plane, is a large arrow 13½ ft. in length, and, painted on this arrow in black, against a chrome yellow background, is the name of the town the pilot is approaching. Superimposed on the tail of the large arrow is a smaller arrow pointing true north.

An "Aerovane" erected near Chicago, Ill.

The 4 x 10 ft. panel immediately beneath the arrow is used for road travel information and suspended from this panel are two plates, 4 x 5 ft., which can be used for advertising purposes.

An Aerovane is clearly visible at 1,000 ft. and thus an aviator, by following any main artery of ground travel, can easily pick up an Aerovane, the presence of which is readily identified by the distinctive color of the windsock, ascertain his ground wind direction, name of the town he is approaching and get his compass bearing.

Shock Absorber Products

SHOCK ABSORBER cord in a variety of forms and sizes is offered by the B. F. Goodrich Rubber Co., Akron, O. This shock absorber cord meets recent Army Air Corps and Navy specifications and is made in ⅜, ½ and ⅝ in. sizes. Ring type cord specially adapted to split landing gear and tail skids may also be furnished in the same diameters to inside circumferences of 22, 25, 30, 35, 40 and 45 in.

Great tension and elongation are obtained in this cord by weaving a jacket of specially treated cord on rubber threads while they are stretched approximately 100 per cent. The jacket cord is treated to resist weathering and wear.

Goodrich shock absorber discs are lathe cut and ground from hand made tubing to obtain accurate dimensions and the best advantage of grain in the rubber. These discs can be furnished in any size and quantity. Soft, medium and hard compounds are available so that various degrees of resiliency may be obtained by combining discs of different degrees of hardness. Metal spacers may be inserted between the rubber discs to establish greater compactness at intervals.

The company includes tables on load deflection tests on the three different grades of rubber discs in its general catalogue of aeronautical products which will be sent to persons interested on request.

Lamps for Airport Lighting

A NEW line of lamps has just been offered for airport lighting by the National Lamp Works of General Electric Co., Nela Park, Cleveland, O. Five lamps especially designed for aeronautical uses are included.

The 10,000 watt (10 kw.), 115 volt, aviation field floodlight lamp has a prong type of base and should be mounted base down. It can be used in either reflector or lens type projectors. The 5,000 watt (5 kw.), 115 volt aviation field floodlight lamp, for use in either lens or reflector equipments also is fitted with the prong base and should be burned base down.

To produce a narrow spread of light in a vertical plane the 3,000 watt (3 kw.), 32 volt, field floodlight lamp has been developed. It is designed for either lens or reflector type projector units. The prong type of base is used. The 1,500 watt, 32 volt, lamp is recommended for field floodlight or advertising beacons. For a field floodlight lamp, its application is the same as for the 3,000 watt lamp. Where a strong beam of light is required, as in advertising beacons, this lamp is very effective. The lamp is fitted with the prong base and should be mounted base down.

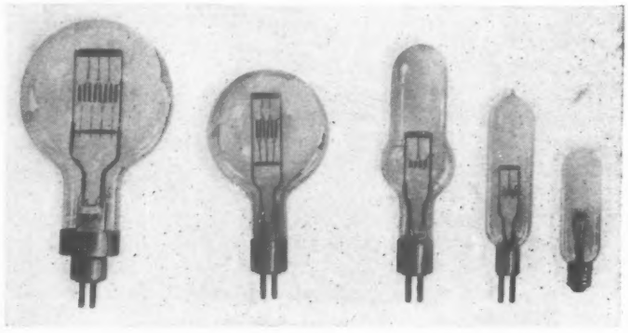

New General Electric lamps. Left to right: 10 kw., 5 kw., and 3 kw. field floodlight; advertising beacon and airport beacon type.

The 1,000 watt, 115 volt, standard airway and airport beacon lamp is designed to give a narrow, intense beam of light. It is fitted with the mogul screw base. Base down burning is recommended for this type of lamp.

AC Flame Arrester

A DUAL air cleaner-flame arrester has been developed that removes all hazards due to carburetor backfires from airplane engines. This device is the result of long research work by engineers of the AC Spark Plug Co., Flint, Mich., and has been tested and approved by the National Board of Underwriters. According to the underwriters' report no flame can be made to pass through the air cleaner-flame arrester even under the most severe conditions.

The device, attached to the intake of the carburetor also prevents dust particles from reaching the engine. The dust as it comes in contact with copper ribbons in the apparatuus adheres to the oiled surfaces and is retained there. The cleaning element should be washed in gasoline and re-oiled at regular intervals to maintain its efficiency.

The principle of the flame arresting feature is the quenching of the flame by a material which will absorb it at such a rate that the gas is cooled below the point of ignition. This material consists of flat copper ribbon knitted and arranged in a container so that any flame emerging from the carburetor inlet must pass through.

Where dependability was paramount . . .

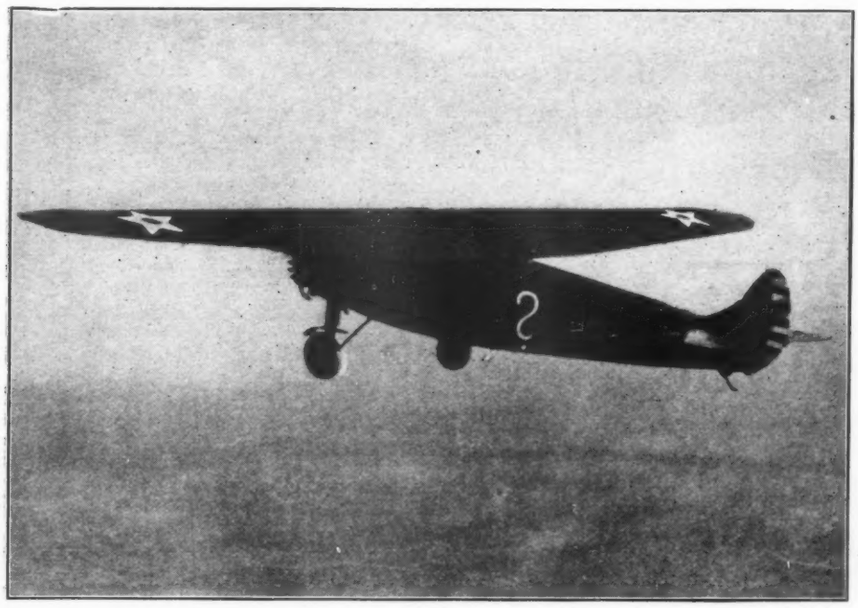

The Bethlehem Alloy and Special Steel Forgings did not fail

A NUMBER of vital parts* in the three Wright Whirlwind Engines which drove the "Question Mark" were made from forgings manufactured by Bethlehem Steel Company, from Bethlehem Alloy and Special Steels.

Imagine the terrific stresses, repeated thousands of times every minute, which these parts withstood during 150 hours of unbroken flight! Such conditions necessitate steels of the highest character.

The same facilities, the same experience in steel-making, the same organization that produced the alloy and special steel forgings which performed their vital tasks so well in the engines of the "Question Mark" are available to serve you.

BETHLEHEM STEEL COMPANY
General Offices: Bethlehem, Pa.

DISTRICT OFFICES:

New York, Boston, Philadelphia, Baltimore, Washington, Atlanta, Pittsburgh, Buffalo, Cleveland, Detroit, Cincinnati, Chicago, St. Louis, San Francisco, Los Angeles, Seattle, Portland, and Honolulu.

Bethlehem Steel Export Corporation, 25 Broadway, New York City, Sole Exporter of our Commercial Products.

***Bethlehem forgings used for parts of "Question Mark" engines included forgings for Inlet and Exhaust Cams, Cam Driving Gears and Pinions, Inlet and Exhaust Valve Rocker Arms, Master Connecting Rods and Straps, Articulated Connected Rods, Cylinder Sleeves.**

BETHLEHEM

ALLOY AND SPECIAL STEELS

THANK YOU *for mentioning* AVIATION

Schools —

How Will You Attract Your Students?

BY excellence of instruction, of course, which will bring, in years to come, a fine repute. For that there is no substitute. But what is the answer to the problem in the meantime?

Authorities at the Chicago Aeronautical Exposition estimated an increase of from 500% to 800% in the number of flying schools for 1929. The competition to secure students will be keen.

Beauty is a convincing influence upon a man buying a car. Even more, beauty appeals to the flying student. Combine this beauty with sturdy construction and ease of handling as has been done in the Mohawk "Pinto," and you have the ideal school plane.

Complete information about the Mohawk "Pinto" will be sent upon request. Also distributors' proposition for schools and other responsible persons or organizations.

Write or wire at once.

Mohawk Aircraft
CORPORATION

2603 Delaware St., S. E., Minneapolis, Minnesota, U. S. A.

Approved Type Certificate No. 95, U. S. Department of Commerce

BERRYLOID *boosts* *Command-Aire sales*

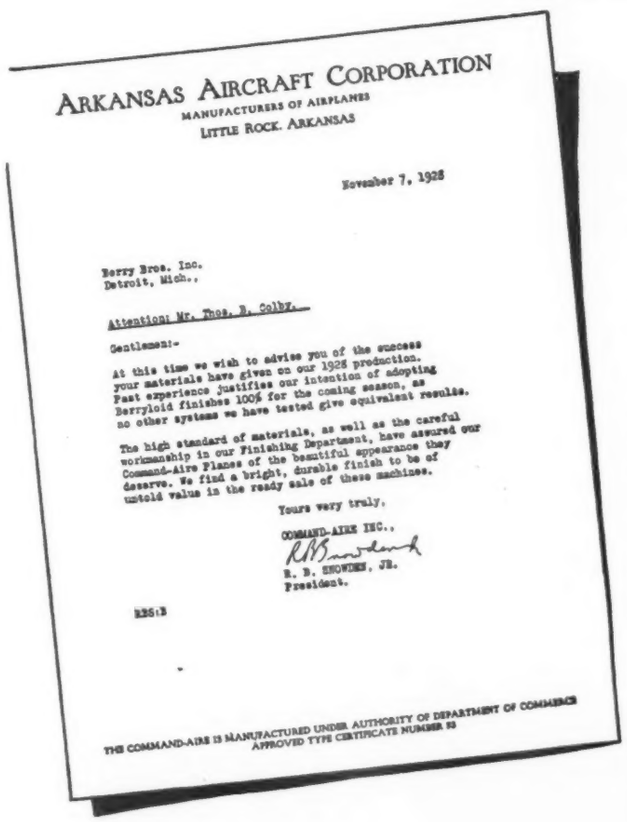

ARKANSAS AIRCRAFT CORPORATION
MANUFACTURERS OF AIRPLANES
LITTLE ROCK, ARKANSAS

November 7, 1928

Berry Bros. Inc.
Detroit, Mich.,

Attention: Mr. Thos. B. Colby.

Gentlemen:-

At this time we wish to advise you of the success your materials have given on our 1928 production. Past experience justifies our intention of adopting Berryloid finishes 100% for the coming season, as no other systems we have tested give equivalent results.

The high standard of materials, as well as the careful workmanship in our Finishing Department, have assured our Command-Aire Planes of the beautiful appearance they deserve. We find a bright, durable finish to be of untold value in the ready sale of these machines.

Yours very truly,

COMMAND-AIRE INC.,
R. B. Snowden
R. B. SNOWDEN, JR.
President.

RBS:B

THE COMMAND-AIRE IS MANUFACTURED UNDER AUTHORITY OF DEPARTMENT OF COMMERCE APPROVED TYPE CERTIFICATE NUMBER 93

"We find a bright, durable finish to be of untold value in the ready sale of Command-Aire planes." This brief sentence, an extract from the letter at the left, accounts in part for the general use of Berryloid, the high luster lacquer, on the commercial ships manufactured in this country.

PROGRESSIVE AIRCRAFT FINISHES

Berry Brothers is constantly strengthening its position in the aircraft industry. Examination of the airplanes exhibited at the Chicago show reveals the fact that Progressive Aircraft Finishes are used by practically every builder.

Any Berry Brothers' customer will tell you why.

Progressive Aircraft Finishes carried in stock for immediate shipment by

Central Wall Paper & Paint Co., *Indianapolis, Indiana*
Johnson Airplane & Supply Company, *Dayton, Ohio*
Nicholas-Beazley Airplane Co., Inc., *Marshall, Missouri*
Paul R. Braniff, Inc., - - *Oklahoma City, Oklahoma*
Woodward, Wight & Co., - - *New Orleans, Louisiana*

Member Aeronautical Chamber of Commerce

BERRY BROTHERS
Varnishes Enamels and Lacquers

Detroit, Michigan — *Walkerville, Ont.*

Manufacturer of Progressive Aircraft Finishes

THE CHOICE
of Those Who Know:

LAIRD'S unending string of air victories prove the high standards of durability and reliability built into each Laird plane.

There's a vital reason when one make of plane so consistently proves the winner in race after race. In the gruelling elimination of contest after contest standard Laird planes have been consistently winning:

First in 1928 Los Angeles Closed Course Event No. 4.

First and Second in Los Angeles-Cincinnati Air Derby.

Both First and Second in the '27 National Air Derby.

Second in 1928 Class B National Air Derby.

For fast, practical, and dependable air transportation, Laird proves itself outstanding in reliability as well as speed. This *habit of winning* demonstrates Laird's *extra* dependability—the factor that enables you in a Laird plane, to come through when needed.

The Ideal Model for Commercial Transportation

The Laird cabin-ship has been a major development of the commercial air travel. A constantly increasing number of firms and business executives are finding fast transportation in these safe cabin ships—enclosed and finished in de luxe comfort. We welcome the opportunity of offering free demonstrations to responsible parties.

Profitable Distributor Franchise Open

In a few open territories Laird's Distributor proposition offers unusual opportunity to parties with airport facilities and funds to handle the sale of Laird Commercial planes.

The growing list of Laird owners is a gratifying sign of recognition from those best qualified to know.

E. M. LAIRD AIRPLANE COMPANY - 4500 West 83rd Street, Chicago, Ill.

Not connected in any way with any other manufacturer of airplanes. Laird Planes are made only at the E. M. Laird Company factory, Asburn Field, Chicago, Ill.

The AMERICA, which carried Commander Byrd to France, was equipped with Exide Batteries for radio reception.

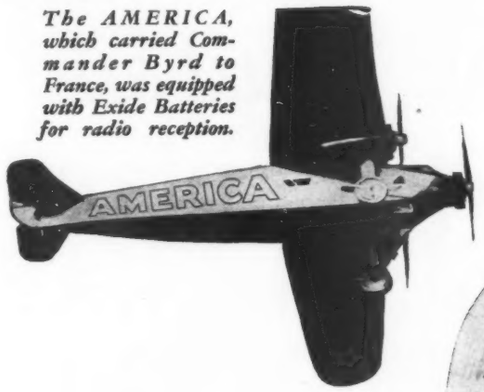

The FLOYD BENNETT is equipped with Exide Batteries

Byrd Antarctic Expedition

uses Exide Batteries exclusively

Bark CITY OF NEW YORK, equipped with a 60-cell Exide for emergency radio operation.

Over the North Pole . . . across the Atlantic . . . to the South Pole . . . these dependable batteries accompany Commander Byrd

AGAIN a Byrd Expedition chooses Exide Batteries. This time to the South Pole. Exide Batteries are on the "City of New York" . . . Exide Batteries on the dog-sleds . . . Exide Batteries on the "Floyd Bennett" as it zooms over Antarctic wastes.

For these dependable batteries proved themselves on the Arctic Expedition in 1925 and on the Byrd North Pole Flight in 1926. They were faithful again on the Byrd Transatlantic Flight to France in 1927. And now, in 1928 and 1929, they're proving themselves once more.

Exide Aircraft Batteries have also gone around the world . . . across the Pacific . . . over every land in every clime. They have millions of miles of air service to their credit. And Exide engineers are constantly striving to improve these batteries.

For electric starting . . . for navigation and landing lights . . . for radio power . . . Exide Aircraft Batteries meet your needs. Write for full information.

Exide
AIRCRAFT BATTERIES

THE ELECTRIC STORAGE BATTERY COMPANY, Philadelphia

Exide Batteries of Canada, Limited, Toronto

KINNEAR
HANGAR DOORS

Years of Experience

IT is now thirty-three years since we began manufacturing and selling Kinnear Doors. Thirty-three years of continuous satisfaction and quality-giving service. The years have brought competition into the field but we exist and thrive because our product is superior, being accepted as the standard of quality everywhere. When we started in business we were thoroughly convinced that the public wanted quality at a reasonable price. The belief, "Quality First," has become a motto that is instilled into every person in our organization. The public does want quality—you want quality in whatever you buy.

We wish you could go through our factories. You could see the pains with which every process in the manufacture of Kinnear doors is handled. It is the attention we give to the little details, as well as the big points, that gives our product that distinction which no other has equalled. The men in the factory are skilled workmen who feel a personal responsibility in every piece of work they turn out.

Our ambition has been to produce a door that would meet all the requirements of aviation buildings, especially the hangars. In order to accomplish this our engineers were given a free hand. They have now turned out both a hand operated and a motor operated door that will meet the demands made upon it.

May we have the opportunity of going into details with you and figuring your requirements?

The Kinnear Manufacturing Co.
MAKERS OF KINNEAR AUTOMATIC FIRE DOORS
General Offices:
5 Fields Ave. Columbus, Ohio

District Offices in:

BOSTON
294 Washington St.

CHICAGO
128 N. Wells St.

CINCINNATI
528 Walnut St.

DETROIT
812 Ford Bldg.

NEW ORLEANS
730 Hibernia Bk. Bldg.

NEW YORK
342 Madison Ave.

PHILADELPHIA
503 Wesley Bldg.

PITTSBURGH
617 Oliver Bldg.

KANSAS CITY, MO.
111 Railway Exchange

WASHINGTON, D. C
1135 Investment Bldg

KINNEAR
ROLLING · DOORS

The *front end* of a plane is like the *hind end* of a mule. . . . .

BUT the same people who will carefully stay away from a mule's heels will unthinkingly rub noses with a 'plane. They haven't learned yet, that the front end of a 'plane demands the same respect as the hind end of a mule.

People must be protected against their own ignorance and thoughtlessness when visiting a flying field. The surest, most efficient way to protect visitors is to restrict them to a fenced safety zone with an Anchor Chain Link Fence.

Let us solve your fencing problems. 75 Anchor offices located in principal cities from coast to coast are ready to advise you or take over all details of erection. Write or wire the office nearest you.

ANCHOR POST FENCE CO.
Eastern Ave. & Kane St., Baltimore, Md.

Albany; Boston; Charlotte; Chicago; Cincinnati; Cleveland; Detroit; Hartford; Houston; Los Angeles; Mineola, L. I.; Newark; New York; Philadelphia; Pittsburgh, St. Louis; San Francisco; Shreveport.

Representatives in other principal cities.

Consult your local classified telephone directory.

ANCHOR
CHAIN LINK
Fence

A NATION-WIDE FENCING SERVICE

Look

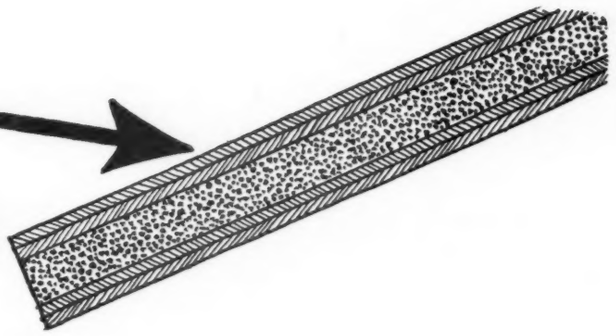

INSULATED

HASKELITE plywood for aircraft

ALTHOUGH HASKELITE and PLYMETL possess the same insulating quality as wood, specially insulated panels with cores of Balsa wood, Celotex, Masonite and similar materials are now being produced. Samples of these insulating panels were shown at the Chicago Exposition.

Builders of aircraft greeted the new insulating panels enthusiastically and are planning to utilize their added insulation, combined with great strength, and light weight for floors and walls to meet the flying public's demand for all weather comfort and durability. 85% of plywood now used is HASKELITE.

Aircraft engineers and builders can secure blue print booklet of aircraft applications on request. It's free—but it's valuable.

PLYWOOD
HASKELITE
PLYMETL

Haskelite Manufacturing Corporation
120 South LaSalle Street, Room 1120, Chicago, Illinois

California Panel & Veneer Company
955 S. Alameda St.,
Los Angeles, California

Aeronautical Chamber of Commerce

Railway & Power Engineering Corporation, Limited
Montreal, Toronto, Winnipeg, New Glasgow

WHAT THIS PILOT KNOWS for—

PILOT C. P. CLEVENGER, out of the wealth of his 10 years' flying experience, explains in simple, interesting language, every movement of the controls for take-offs, landings, straight flight and aerobatics in his nationally famous instruction book—
"MODERN FLIGHT"

STUDENT PILOTS and young men about to enter the game can cut down the number of hours usually necessary before soloing through the wise investment of One Dollar.

HERE IS MY DOLLAR

Gentlemen:
Rush copy of Clevenger's complete flying course.

Name.....

Address.....

Alexander Aircraft Co.

Manufacturers of the Eaglerock
Room 491, Alexander Industries Bldg., Colorado Springs, Colo.

SAVES YOU $50
when you LEARN TO FLY

The ambition of every flying student is to be able to handle a ship alone in the least time possible. Purchase of Clevenger's "Modern Flight" is a long step in that direction.

More Ireland Flying Boats to Curtiss

The success of the Ireland Flying Boat is indicated by increasing sales. The Curtiss Flying Service at their airports in Florida are taking deliveries of these ships as fast as they are being finished.

Demand for air transportation service has prompted Curtiss to put many of these Ireland Flying Boats into immediate commercial operation. Others are being sold to individual sportsmen who appreciate the unusual safety of this improved type of flying boat.

Ireland Flying Boats will be sold by Curtiss Flying Service at all of the airports they operate and plan to establish. Demonstrations may be arranged at Curtiss Field, Garden City or at Palm Beach or Miami, Florida.

A new booklet has been prepared describing Ireland Flying Boats and will be sent to anyone interested upon request.

Ireland Flying Boats

IRELAND AIRCRAFT, Inc.
Garden City, N. Y.
New York Office—501 Fifth Avenue

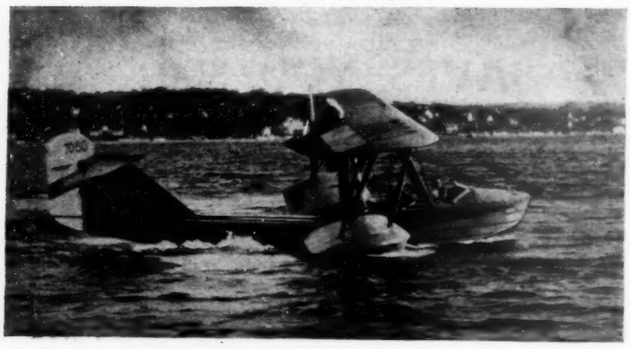

RADIO

ENGINEERING
CONSULTING
CONTRACTING

Aviation *Radio*

The design of our apparatus comprises the most modern and latest equipment developed in the radio industry.

Fully automatic transmission and reception so simplified that no knowledge of radio engineering is required for operation—the transmitter has no manual tuning, the receiver has but a single control.

Each piece of equipment designed especially for the installation on which it will be used, thereby assuring maximum performance and constant reliable service.

Telephone & Telegraph Transmitters
Telephone & Telegraph Receivers
Beacon & Beam Transmitters
Beacon & Beam Receivers
Navigational Instruments

BUNNELL AIRCRAFT RADIO CORPORATION

A Subsidiary of J. H. Bunnell & Co., Inc.
32 PARK PLACE NEW YORK

"How To Use Aviation Insurance Protection Economically and Advantageously"

Insurance Protection Available

aggregates over
$1,000,000 per aircraft

Constructive total loss
Accidental Damage
Fire, Tornado, Theft
Cargo (direct and liability)
Damage to ground property
Airport and Airmeet liability
Life insurance
Public liability
Property Damage
Passenger liability
Personal Accident
Compensation
and
other forms constructed as required

An Open Market
to all Insurance Companies, Reinsurers, Agents and Brokers. Standard conditions amended to meet special requirements.

• • • • Is the title of our new brochure. Ask us for a copy. It explains also our free advisory service founded on 20 consecutive years' practical experience in aviation and supported by our corps of highly qualified aeronautical engineers and our staff of executives, each one of broad practical experience in flying besides long training in insurance.

GOOD SERVICE COUNTS

More aviation claims paid by our organization than by all other organizations throughout the world.

Lowest Rates-Broadest Coverage-Highest Indemnities-Quickest Service

Policies have been issued over a long period of years and, among others, in favor of Federal and State Governments, Boeing Air Transport, Pacific Air Transport, Colonial Air Transport, Colonial Western Airways, National Air Transport, Western Air Express, Robertson Aircraft Corp., Colorado Airways, Northwest Airways, Walter T. Varney, Inc., Southern Dusting Co., Philadelphia Rapid Transit, Stout Air Service, Boston Airport Corp., American Railway Express, Ford Motor Company, Fairchild Aerial Surveys, Fairchild Flying Corp., Pacific Marine Airways, Pitcairn Aviation, United Cigar Stores Co., Royal Typewriter Co., Hamilton Maxwell, Inc., Pulitzer and other race meetings, Universal Motion Picture Corp., Fox Film Corp., American Airports, Inc., Jefferson Airways Corp., Midplane Sales & Transit Co., Stinson Aircraft Corp., Thompson Aeronautical Corp., Atlantic Aircraft Corp., Pratt & Whitney, Caddo Co., Chas. Rogers Productions, Canadian Transcontinental Airways, Ltd., Western Canada Airways, Ltd., S.C.A.D.T.A. of Colombia, S. A., Andian National Corp. of Colombia, S. A., Maddux Air Lines, Scenic Airways, Standard Oil Co. of Cal., Richfield Oil Co. of Cal., Trans-continental Air Transport, The Daniel Guggenheim Fund for the Promotion of Aeronautics, Gene Tunney, and many others including Col. Charles A. Lindbergh, Sir Hubert Wilkins, Anthony Fokker, and other leaders in aviation.

BARBER & BALDWIN, Inc., Graybar Bldg., New York City, *Tel.* Lexington 4316
Underwriting Agents for All-American Insurers and Reinsurers

B&B SERVICE

20 YEARS OF PRACTICAL EXPERIENCE IN AVIATION

Every Pilot *and* Executive

SHOULD HAVE the facts on Aerol Shock Absorbing Struts.

—They make landing comfortable — always.

—They make forced landings less hazardous.

—They protect the plane and cut maintenance cost.

Write today for illustrated booklet.

CLEVELAND PNEUMATIC TOOL CO.
3737 E. 78th St., Cleveland, Ohio

AEROL shock absorbing STRUT

OXY-ACETYLENE EQUIPMENT IS OUR ONLY PRODUCT

Our organization has grown with the industry and has developed equipment to meet every welding and ctuting requirement. Oxy-acetylene equipment is our only product. All our energy is concentrated on its production. For this reason, and because of our efficient manufacturing processes and quantity production, we are able to offer you most excellent equipment at very attractive prices.
Ask for our catalog
Smith Welding Equipment
CORPORATION
Minneapolis, Minnesota
SMITH'S

Challenger!

Comet—OX5—Warner

TAKE your pick—step into the comfortably upholstered, roomy cockpit. Notice the complete instrument equipment and how conveniently they're placed. See how the controls respond to the slightest touch.

Give her just a short run, then up and away. Watch how swiftly she and steadily she climbs—how quickly she obeys. Loop her and roll her—get all the fun that flying provides. Then put her down slowly—surely into the smallest field.

Trim of line—graceful as a bird—easily controlled—strong, sturdy, safe—the ship of ships for commerce or sport—Challenger!

KREIDER-REISNER AIRCRAFT CO. INC. Challenger HAGERSTOWN, MARYLAND, U.S.A.

Write for illustrated booklet telling all about the Challenger.

NEW YORK AVIATION SHOW

In the very heart of the World's greatest Aeronautical market.

FEBRUARY 6TH-13TH

EDUCATIONAL
INSPIRATIONAL
ENTERTAINING

GRAND CENTRAL PALACE

Held under the Auspices of Aviators' Post No. 743, American Legion

Flying Suits *and* Helmets

Winter Weight New Low Prices

belt 3-inch

No. V-36 Moleskin cloth, waterproofed; lined with sheepskin, fleece, ½ to ¾ inch thick. Talon hookless fasteners in front and wrists; gussets and straps at ankles. Collar of good fur. (When ordering state height and chest size.)

$67.50

No. V-37 Khaki cloth, waterproofed, otherwise same as V-36.

$50.00

No. V-38 Khaki cloth, waterproofed, wool blanket lined, shearling collar.

$27.50

Send for catalog AV-3 for complete description

No. V-316 winter weight Helmet, chocolate color leather, sheepskin fleece lining. Each, $5.00.

IHLING BROS. EVERARD CO.

KALAMAZOO, MICHIGAN

Type F, Star Pathfinder Compass

The modern Aircraft Compass

(flush mounting)

Type F, Star Pathfinder Compass has built-in compensating unit, eliminating troublesome loose magnets. Mounts flush with instrument board. Compensating unit is easily accessible by means of removable cover plate. Magnifying cover lens gives great visibility.

CONSOLIDATED Instrument Company of America, Inc.

41 East 42nd Street, New York

Altimeters, tachometers, oil pressure gauges, gasoline gauges, thermometers, inclinometers, clocks, air speed indicators, compasses, navigation lights, landing lights, dash lights, etc.

HAMILTON PROPELLERS ARE USED THE WORLD OVER

HAMILTON PROPELLERS

TRADE MARK

Hamilton Aero Mfg. Co., 60 Keefe Ave., Milwaukee, Wis.

MILESTONES OF PROGRESS

They come from all over

FROM every part of the country, men come to the SWALLOW plant in Wichita to buy SWALLOWS.

Where we have a dealer in the territory, of course we turn the business over to him. Yet there are some places where there is no Swallow dealer as yet, and we are forced to sell direct to the customer.

It's "dollars to doughnuts" that before 1928 is over every state in the Union will be the home of a number of new 1928 Swallows. Somebody will get that nice business. Will it be you?

Better write or wire us today to see if YOUR territory is still open.

SWALLOW AIRPLANE CO.
WICHITA, KANSAS

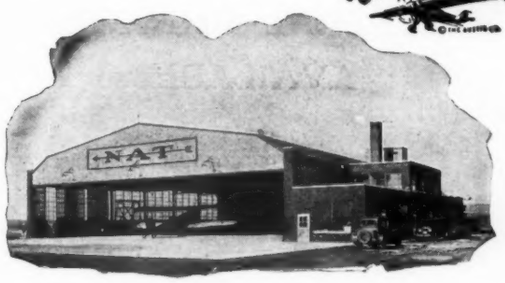

Airports and Aviation Buildings by Austin

COMPLETE *Airport Service* — preliminary surveys and reports, engineering surveys and studies, site selection.

Design and Construction — grading, drainage, lighting, all necessary airport buildings such as hangars, depots, etc. Also aircraft factory buildings.

Ask for approximate costs and booklet "Airports and Aviation Buildings."

THE AUSTIN COMPANY
Airport Engineers and Builders CLEVELAND
New York, Chicago, Philadelphia, Detroit, Cincinnati, Pittsburgh, St. Louis, Seattle, Portland, Los Angeles, San Francisco, Dallas

THE AUSTIN METHOD

AVIATION INSURANCE
in
UNITED STATES AIRCRAFT INSURANCE GROUP

Casualty Companies	Fire Companies
Maryland Casualty Company	National Union Fire Insurance Co.
New Amsterdam Casualty Co.	North River Insurance Co.
New York Indemnity Co.	Pacific Fire Insurance Co.
United States Fidelity & Guaranty Co.	United States Fire Insurance Company

Managers and Underwriting Agents

UNITED STATES AVIATION UNDERWRITERS
INCORPORATED
80 John Street, New York

"IF WE SELL IT—IT'S RIGHT"

WE have yet a few choice, finely conditioned planes for sale. Waco's and Fairchilds, OX-5, Wright J-5 and Hisso powered, at attractive prices.

USED PLANE DEPT.

The EMBRY-RIDDLE Co.
AIRMAIL CONTRACTORS
Lunken Airport Cincinnati, Ohio

Hartshorn
Est. 1860

SQUARE SECTION TIE RODS FOR INTERNAL AIRCRAFT BRACING

SQUARE Section Tie Rods were developed to meet the need for a light, strong, easily adjusted internal wing and fuselage bracing. They are helping commercial planes to withstand those strains and stresses to which they are peculiarly subject.

AERONAUTICAL CHAMBER OF COMMERCE

The flat faces permit adjustment with wrenches at any point along the length of the rod.

Your ship will stand up better—your mechanics do more work with their time, if the ships are equipped internally with Hartshorn Square Section Tie Rods.

Write for Circular A 3

STEWART HARTSHORN CO.
250 Fifth Avenue, New York City

THANK YOU *for mentioning* AVIATION

GENERAL MANAGER AVAILABLE

Have just completed the successful organization of one of America's largest and finest commercial aircraft plants.

Owing to the introduction of new capital and administration into this Company, my future opportunities will be restricted.

Will therefore be interested in hearing from a well financed concern having a quality line of ships, and also a management problem.

BOX NO. 1160

Notrus Hangars



Construc t e d of arched, sectional units—bolted together on the j o b — covered with r u s t l e s s galvanized iron or sheathing and asbestos roofing.

Not a portable h a n g a r, but easily dismanteled and moved — 100% salvage.

Standard sizes for U. S. Dept. of Commerce Class A-B-C airports. Also individual hangars.

Substantial arched roof construction provides unobstructed floor area—space at each side of doors provides work space, storage, office or floor area for actual ship storage.

Attractive introductory price to dealers for first hangar in your territory.

NOTRUS HANGAR CORPORATION

Eastern Representative
GUARANTEE CONSTRUCTION CO.
140 Cedar St. New York, N. Y.

ESPERSON BUILDING
HOUSTON, TEXAS

Have you seen:

The 2 I — two passenger open

The 4 I — four passenger cabin

The 7 I — seven passenger cabin

FAIRCHILD *AIRPLANES*

TITANINE

Registered Trade Mark

A Complete Range of
AIRPLANE FINISHING MATERIALS

Dope-proof paint, black, white, aluminum or grey;
Clear nitrate and acetate dopes;
Ti-Two colored one-material dope;
Pigmented nitrate dopes;
Flexible wing lacquer;
Wood and metal lacquer (for inside and outside finish)

TITANINE, Inc.
Union, Union County, New Jersey
Contractors to the United States Government

CONTINENTAL AIRCRAFT CORP.

AIRPLANE MANUFACTURERS

HEMPSTEAD, L. I. NEW YORK

A Complete, New Catalog

Tycos Instruments
for AVIATION

of *Tycos* Altimeters, Flight Test and Meteorological Instruments is just off the press. Every pilot and airport official should have a copy of this book. We will mail you one free upon request.

Taylor Instrument Companies

ROCHESTER, N. Y., U. S. A.

Canadian Plant
Tycos Building
Toronto

Manufacturing Distributors
in Great Britain
Short & Mason, Ltd., London

For difficult tubular seaming

Union Special Sewing Machines

THE Union Special *"Thirty-Five-Seven"** is especially valuable for closing seams on wing covering sections and a variety of other tubular seaming. This style machine feeds off the arm, making operation simple and convenient. Fast production is combined with the highest quality of work.

Style *"Thirty-Five-Seven"** produces the double locked stitch seam and is available for either two or three needle work.

Send for data on the exclusive features of Union Special Sewing Machines and for samples of their work.



*REG. U. S. PAT. OFF.

UNION SPECIAL MACHINE CO.

400 N. Franklin Street
Chicago, Illinois

A1-19-Gray

SEAMLESS STEEL TUBING

All Aircraft Grades

WAREHOUSE STOCKS for immediate shipment in any quantity.

MILL SHIPMENTS for substantial production requirements.

SERVICE STEEL COMPANY

32 E. Front St. CINCINNATI
1435 Franklin St. DETROIT
216 N. Alameda St. LOS ANGELES

P-384

PARKER TUBE COUPLINGS

promote the use of seamless, non corrosive tube in long lengths with economy and security from corrosion and leakage—*regardless of changing pressures and temperatures.*

Available in sizes from 1/8" to 3" tube in innumerable shapes and numerous alloys.

SEND FOR LITERATURE

The Parker Appliance Co.

10320 BEREA RD., CLEVELAND OHIO, U.S.A.

NITRATE DOPE

NEW PRODUCTION
IMMEDIATE SHIPMENT

Contractors to U. S. Army and Navy

VAN SCHAACK BROS. CHEMICAL WORKS

3358 AVONDALE AVE. CHICAGO, ILL.

WENDELL P. MILLER
and Associates

AIRPORT DRAINAGE ENGINEERING

Engineers
Constructors

208 S. La Salle St., Chicago
85 East Gay St., Columbus, O.

BETTER AIRPORTS WPM AND ASSOCIATES

LET EXPERTS MAKE

Your Air-Cooled Cylinders

Until within the last few years, the quantity production of light weight air-cooled cylinders, has been limited to a very few companies. One of these companies, with twenty-five years' experience in this line, has increased its facilities and will be pleased to quote on castings only, on patterns and castings from your blue prints, or on finished cylinders, machined to your specifications.

If your cylinder designs are not yet complete, our knowledge of the characteristics of alloys of nickel, iron, and steel, may be of value to your designers.

AIR COOLED CYLINDERS

S. Cheney and Son

MANLIUS, N.Y.

? ? ? ?

AQUATITE

Waterproof Plywood

Was Used Almost Exclusively in the Record Breaking

QUESTION MARK

CRESCENT PANEL CO.
Louisville, Ky.

? ? ? ? ? ?

MEYROWITZ LUXOR GOGGLE
U.S. Air Service Model No. 6

Send for Catalog

E. B. Meyrowitz

$10.75

Dept. B, 520 Fifth Ave., New York

PERRY-AUSTEN DOPES

Acetate Nitrate — Clear Pigmented

Perry-Austen Clear Acetate Dope
The Lasting Undercoat

The Best Finish { Undercoats—Our Clear Acetate / Uppercoats—Our Pigmented Dopes

PERRY-AUSTEN MFG. CO.
Contractors to United States Government

Main Office and Works: Grasmere, Staten Island, N. Y.
Tel.: Dongan Hills 707
***Chicago:* 510 N. Dearborn St. Tel.: Superior 6948**

Everything Aeronautical

At

WORLD'S LARGEST AIRPLANE SUPPLY HOUSE

Write for Catalog F

Nicholas-Beazley Airplane Company Inc.
Marshall -- Missouri

Keeping Abreast

of aeronautical activities is possible only by reading

AVIATION

each week. Yearly subscription rates: United States $4; Canada $5; Foreign $6.

AVIATION PUBLISHING CORP.
250 W. 57TH STREET, NEW YORK CITY

TIME PAYMENT SALES

WE are prepared to arrange a plan to meet your requirements for adequate insurance cover on airplanes sold on the time payment plan, protecting the interest of the manufacturer, finance company, or purchaser as may be required.

Aviation Protection, Inc.

Insurance Brokers to Aviation

110 William Street, New York, N, Y.

Telephones: Beekman 5267-4235

A *Compression lock—*

safer!

—no tensile or torsional strains on the tie rod thread

MACWHYTE

Safe Lock Terminals for Tie Rods

Made by Macwhyte Company, 2905 Fourteenth Avenue, Kenosha, Wisconsin. Makers of *Streamline and Round Tie Rods.*

PLYCOR

Birch Aircraft Plywood

Highest Standard of Quality

Standard thicknesses:	0.8 mm. (1/32")	1.0 mm. (1/24")	1.2 mm. (3/64")	1.5 mm. (1/16")	2.0 mm. (5/64")

Standard size sheets: 1000 mm. x 1200 mm. (40" x 48")

PROMPT SHIPMENT FROM STOCK

THE PLYCOR COMPANY

CHICAGO, ILLINOIS
1524 So. Western Avenue

KITTY HAWK

ROUGH GOING? Do all small ships jump around in rough weather? No, not if they have a reasonable wing loading. Give us the ship that always swings back on her course without yawing if she is a little disturbed. KITTY HAWK does that.

BOURDON AIRCRAFT CORP.
Hills Grove, R. I.

Siemens ENGINES

80—115—125 H. P.

Direct from Manufacturer

Regarding Purchase or Service, communicate with

K. G. FRANK

75 West St., New York

General Representative of
Siemens & Halske A.G.



EDO

THE FLOAT MAKERS

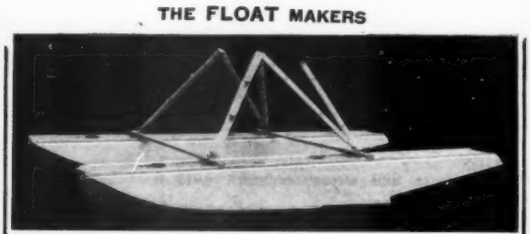

EDO converts land planes into seaplanes by furnishing a complete float installation, which is interchangeable with the wheel landing gear. Its installations are approved by the Department of Commerce. Complete seaplanes incorporating EDO equipment can also be purchased direct from the leading airplane manufacturers. May we send particulars?

THE EDO AIRCRAFT CORPORATION
600 Second St. College Point, L. I.

Books on aviation regardless of where published may be obtained through AVIATION'S book department

THE following books were chosen in an effort to compile a concise list of the best of modern aeronautical publications:

AERODYNAMICS

AERODYNAMICS AND AIRPLANE DESIGN. By Edward P. Warner (598 pages) .....$ 7.50
Text on aerodynamics and its applications to airoplane design, divided into three parts; airfoils and airfoil combinations, performance calculations, maneuverability and stability. 1927 (advanced student).

ELEMENTS OF AVIATION. By Col. V. E. Clark (193 pages).....$ 3.00
Air and the airfoil, airfoils and air flow, stability and control, earth's atmosphere and the effect of altitude. Weights and dimensions.

ENGINEERING AERODYNAMICS. By Walter S. Diehl (282 pages).....$ 7.00
Text for student and engineer on theoretical aerodynamics, design and performance calculations. Includes wind tunnel data on standard airfoils, fuselages, wires, etc. 1928 (advanced).

ANNUALS

AIRCRAFT YEAR BOOK (551 pages)...$5.25
Published by the Aeronautical Chamber of Commerce. Records the events, records, airplanes, and data on aircraft manufacturers for 1927. Back issue obtainabile.

AMERICAN AIRCRAFT DIRECTORY (176 pages) .....$ 3.00
Cloth .....$ 5.00
Directory of the aircraft industry by states and cities. Lists personnel of the various government bureaus, educational institutions, etc., data on aviation competitions and meets, landing fields and seaplane anchorages. 1928. Revisions published periodically.

JANE'S ALL THE WORLD AIRCRAFT (534 pages) $12.75
Descriptions, photographs, and drawings of airplanes, engines, balloons and airships. 1927.

WHO'S WHO IN AMERICAN AERONAUTICS (200 pages, approximately)..$ 1.25
Names and past activities of everyone connected with the aeronautical industry. 1928.

BALLOONS AND AIRSHIPS

AIRSHIP DESIGN. By C. P. Burgess (300 pages) .....$ 9.00
Structural design and performance of rigid airships. 1927 (advanced student).

PRESSURE AIRSHIPS. By Thomas L. Blakemore and W. Watters Pagon (311 pages) .....$ 8.00
Design and construction of non-rigid and semi-rigid airships. 1927 (student).

DESIGN AND CONSTRUCTION

AIRPLANE FLOAT DESIGN. By H. C. Richardson '112 pages.....$ 5.00
Covers design features of various types of floats and their action in operation (advanced) 1928.

AIRPLANE DESIGN AND CONSTRUCTION. By Otterine Pomilio (404 pages) .....$ 5.00
Design and construction of the airplane, performance calculations, and stress analysis. 1919 (advanced).

AIRPLANE STRUCTURES. By Alfred J. Pippard and Laurence J. Pritchard (359 pages) .....$ 7.50
Airplane structures and stress analysis. 1919 (advanced).

DESIGN OF SCREW PROPELLERS. By Henry C. Watts (340 pages).....$ 8.50
Theory, design and construction of airplane propellers. 1920 (advanced).

MODERN AIRCRAFT. By Victor W. Page (855 pages) .....$ 5.00
Construction of airplanes and engines with descriptions of modern types. Data on aircraft accessories, airships and balloons, inspection, rigging, etc. 1927 (elementary student).

ENGINES

AIRCRAFT ENGINE INSTRUCTOR. By A. L. Dyke (372 pages).....$ 5.28
Handbook on construction, maintenance and repair of aircraft engines, engine accessories and instruments. 1928.

AIRCRAFT POWER PLANTS. By Edward T. Jones, Robert Insley, F. W. Caldwell, and Robert F. Kohr (208 pages) .....$ 4.25
Heat engines explained and compared, with practical notes on operating features. Design and construction of propellers, water ballast recovery. 1926 (advanced student).

THE AIRPLANE ENGINE. By Lionel S. Marks (454 pages) .....$ 6.00
Theoretical and practical design of aircraft engines. 1922 (advanced).

TESTING OF HIGH SPEED AND INTERNAL COMBUSTION ENGINES. By Arthur W. Judge (392 pages).....$ 7.50
Engine tests apparatus, methods, and analysis of results with special reference to aircraft engines. 1924 (advanced).

FLYING INSTRUCTION

AEROBATICS. By Horatio Barber (78 pages) .....$ 3.50
Essential elements of flight instruction and more advanced evolutions such as looping, spinning, etc. Revised edition 1927 (student).

PRACTICAL FLIGHT TRAINING. By Lieut. Barrett Studley 428 pages).....$ 5.00
Manual of practical flying for those taking flight instruction. Well illustrated. 1928.

PRACTICAL FLYING. By Major B. Q. Jones (240 pages) .....$ 3.00
Good book for students gives specific answers on points essential to proper piloting. 1928.

GENERAL

ABC OF FLIGHT. By W. Laurence LePage (141 pages) .....$ 1.50
Beginner's text on the fundamentals of flight, the airplane, flying instruction and engines. 1928 (elementary).

AIRCRAFT HANDBOOK. By Fred H. Colvin and Henry F. Colvin (464 pages).$ 4.00
Care and rigging of airplanes, maintenance and servicing of engines, instruments, air commerce regulations, construction of airports. Revised edition 1928 (student).

AIRMEN AND AIRCRAFT. By Henry H. Arnold (216 pages).....$ 3.50
Non-technical description of modern airplanes and of the instruction courses given in the military services, including accounts of various exploits of the air. 1926 (elementary).

THE AIRPLANE SPEAKS. By Horatio Barber (148 pages) .....$ 3.50
Non-technical description of the airplane and the theory of flight. Revised edition 1927 (elementary).

BOOK OF THE AEROPLANE. By J. Laurence Pritchard (254 pages) .....$ 3.00
Short history of aviation, theory of the airplane, ground organization, and engines. 1926 (elementary).

INSTRUMENTS, NAVIGATION AND METEOROLOGY

AERONAUTICAL METEOROLOGY. By Willis R. Gregg (144 pages) .....$ 2.50
Meteorological information supplied in convenient form for the pilot. 1925.

AIRCRAFT INSTRUMENTS. By Herbert N. Eaton and others (269 pages)....$ 5.00
Theory, construction and operation of modern aircraft instruments. 1926 (advanced student).

LINE OF POSITION BOOK. By P. V. H. Weems (44 pages) .....$ 2.50
Necessary details for the determination of celestial lines of position. 1928.

PRIMER OF AIR NAVIGATION. By H. E. Wimperis (128 pages).....$ 2.50
Navigation of the airplane, from ground or astronomical observations. 1920 (elementary).

PRINCIPLES OF AEROGRAPHY. By Alexander McAdie (318 pages).....$ 4.00
Text on meteorology including cloud studies, study of the atmosphere, forecasting, water vapor, floods, frosts, etc. 1927 (elementary).

LAW

LAW OF AVIATION. By Roland Fixel (286 pages) .....$ 7.50
Municipal, state, national, and international aviation law. Operations, insurance, patents, etc. 1927.

MATERIALS

METALLURGY OF ALUMINUM AND ALUMINUM ALLOYS. By Robert S. Anderson (913 pages) $10.00
Mining, production, metallurgy physical properties, corrosion, heat treatment, and fabrication of aluminum and its alloys. 1925 (advanced).

MODEL AIRPLANES

BEGINNING TO FLY. By Merrill Hamburg .....$ 2.50
How to build and fly model airplanes with additional chapters on full size planes. 1928.

BUILDING AND FLYING MODEL AIRCRAFT. By Paul Edward Garber (300 pages) .....$ 2.25
Complete handbook for all model builders and tournament contestants. 1928.

NARRATIVE

EUROPEAN SKYWAYS. By Lowell Thomas (524 pages) .....$ 5.00
A 25,000 mile air trip over Europe. 1927.

FIRST WORLD FLIGHT. By Lowell Thomas (328 pages) .....$ 5.00
The U. S. Army world flight as related to the author by Lieutenants Smith, Wade, Harding, Nelson, Arnold, and Ogden. 1925.

RECORD FLIGHTS. By Clarence Chamberlin (286 pages) .....$ 2.50
The author's experiences in the air including his trans-Atlantic flight. 1928.

SKYWARD. By Richard E. Byrd (359 (pages) .....$ 3.50
Early training, later experiences, and long flights of the author. 1928.

WAR BIRDS (277 pages) .....$ 2.00
Diary of an unknown aviator at the front.

WE. By Charles A. Lindbergh (318 pages) .....$ 2.50
Flying experiences of the author. 1927.

WINGED DEFENSE. By William Mitchell (261 pages) .....$ 2.50
The needs and opportunities for the aerial defence of the United States. 1921.

OPERATIONS

AIRPORTS AND AIRWAYS. By Donald Duke (178 pages) .....$ 5.00
Airport location and construction; airport publicity; airways and aids to aerial navigation. 1927.

TRANSPORT AVIATION. By Archibald Black (245 pages) .....$ 3.00
An analysis of commercial aviation and its possibilities. 1926.

PHOTOGRAPHY

AERIAL PHOTOGRAPHS. By Dache M. Reeves (307 pages) .....$ 5.00
Study and military application of aerial photographs. 1928 (student).

AIRPLANE PHOTOGRAPHY. By Herbert E. Ives (442 pages) .....$ 4.00
The airplane camera, photography, developing and printing. 1920.

Book Department
Aviation Publishing Corporation
250 W. 57th Street, New York, N. Y.

**Prices include postage to points in the United States. Books may be sent C.O.D.*

AIRCRAFT SERVICE DIRECTORY

See our Advertisement
on page 85 of January 12 issue
PIONEER INSTRUMENT COMPANY
254 LEXINGTON AVE. BROOKLYN NEW YORK

TRIUMPH
MAGNETIC
FUEL GAGES FOR AIRCRAFT
NEW MODELS FOR COWL, WING, OR SPECIAL TANKS
Manufactured by
THE BOSTON AUTO GAGE COMPANY
PITTSFIELD, MASSACHUSETTS

STEARMAN, STINSON AND MONOCOUPE
GEO. A. WIES, Inc.
Hangar — *12 Juniper Ave.*
Curtiss Field — *Mineola, N. Y.*

AIR ASSOCIATES INC.
Eastern Distributors
LOCKHEED "VEGA"
Hangar: Curtiss Field, Long Island, N. Y.
City Office: 535 Fifth Ave., New York City
AIR ASSOCIATES, INC.
Aviation Supplies and Equipment

SHOWALTER-ASSOCIATES INCORPORATED
Airport Planners Architects Engineers
2210 Park Ave.
DETROIT
Suite 247 — Write or Wire

AIRPLANE SPRUCE
Rough Green-Kiln Dried Rough-Air Dried or Finished to your sizes. Prompt shipments in carloads and less than carloads. We supply many of the largest manufacturers in the United States and Europe.
Specialists in Airplane Spruce for Fifteen Years
J. V. G. POSEY & COMPANY
Public Service Building — PORTLAND, ORE.

RUSCO
AERO PRODUCTS
Shock Cords, Aero Rings, Safety-Belts, Grade "A" Aero Cloth, Braids, Lacings, Tapes, Elastic and Non-Elastic Webbings
Write for complete circular
the RUSSELL Mfg. Co.
349 BROADWAY — *Aero. Division* — NEW YORK

Everything for the Airplane
LARGEST AIRPLANE SUPPLY HOUSE IN THE WEST
A complete line of parts and accessories for aircraft at lowest prices. A money-back guarantee on everything sold.
WRITE OR WIRE US YOUR REQUIREMENTS.
CRAWFORD AIRPLANE COMPANY
"Masters of the Air"
350 Washington Blvd. — Venice, California

BLACK & BIGELOW, INC.
Air Transport Engineers
551 Fifth Avenue, . . New York, N. Y.

—Telephones—
GARDEN CITY 5529-W — CEDARHURST 1234
Addington Aircraft Co.
SWALLOW DISTRIBUTORS
Connecticut, New Jersey, New York, Maryland, Massachusetts
P. O. BOX 82 - MINEOLA, N. Y.
Hangar 60 — Curtiss Feld

AVIATION ENGINES REBUILT
Our equipment includes HEALD CYLINDER GRINDER, LANDIS CRANKSHAFT GRINDER, WADELL LINE REAMING FIXTURES for main and connecting rod bearings.
OX5'S A SPECIALTY
Can furnish all parts.
BRING YOUR ENGINE BACK TO FORMER EFFICIENCY
Write for information and prices.
Spencer-Turnbull Co., 278 Main St., Hartford, Conn.

ACCOUNTING — FINANCING
Carl David Oppenheimer, B.C.S.
Certified Public Accountant
742 South Hill Street, Los Angeles, Calif.
1440 Broadway, New York City, N. Y.
Former War Pilot, Reserve Officer Specializing in Aviation Accounting

LUDINGTON
LUDINGTON PHILADELPHIA FLYING SERVICE, Inc.
Operators of Philadelphia Airport
FAIRCHILD Distributors WACO
Most completely equipped airport in Pennsylvania
ALL SERVICES
Best and Quickest Repair Facilities in East

OLE FLOTTORP'S RECENTLY DEVELOPED PROPELLER
is very efficient and operates with less fluttering or vibration
For sale by all supply dealers or factory
Flottorp Propeller Company
1836 LINDEN AVE., S. E.
GRAND RAPIDS, MICHIGAN

PHENIX NITRATE CLEAR DOPE
at $1.35 per gal. in 50 gal. steell drums. Drums extra at $7.00 and full refund if returned in 90 days, freight prepaid. $1.43 per gal. in 50 gal. Wood Barrels. $1.45 per gal. in 30 gal. Wood Barrels. $1.60 per gal. in 5 gal. Boxed Cans.
Wood Barrels and Cans included and not returnable.
Immediate shipment f. o. b. Factory. All fresh made from new and high grade materials. No war stock or reworked materials. Phenix Aircraft Products Co., Williamsville, N. Y.

FLYERS INCORPORATED
OX5 and Whirlwind overhauling, all types airplane rebuilding; most complete shop in central and northeastern New York.
ALBANY AIRPORT, N. Y.

STRESS ANALYSIS
AIRCRAFT DESIGN
AIRPORT CONSULTANTS
PRODUCTION ENGINEERING
HUGH L. THOMPSON CO.
1306 Waldheim Bldg. — Kansas City, Mo.

Different—Advanced—Superior
"MONOID" Propellers
Exclusive construction details plus the famous patented tipping method, make "MONOID" propellers practically indestructible. Send today for complete description and prices.
PARAGON ENGINEERS, INC., BALTIMORE, MD.

AIRPLANE SPRUCE
Large assortment of kiln dried Spruce, graded in accordance with U. S. Specifications by Pacific Lumber Inspection Bureau. Write for prices on one piece or a carload.
FRANK PAXTON LUMBER CO.
KANSAS CITY, KANSAS

Edward A. Stalker, 302 Eng. Bldg.
AIRPLANE DESIGN
Stress Analysis
Performance Tests
Aerodynamic Investigations
Ann Arbor -:- Michigan

SEAMLESS STEEL TUBING
Made to Aircraft Specification 1025-D
Warehouse stock also mill shipment.
THE CLEVELAND TOOL & SUPPLY COMPANY
1427-1437 West Sixth St. — Cleveland, O.

CHOICE TERRITORY STILL OPEN TO DEALERS!
Distributors for the American Eagle Airplanes in New York, New Jersey, Pennsylvania, Connecticut and Florida.
AMERICAN EAGLE AIRCRAFT DISTRIBUTORS
Incorporated
83 Huguenot Street — New Rochelle, N. Y.

EXCEPTIONAL VALUES
ENGINES
INSTRUMENTS
GIE INTERNATIONAL AERONAUTIQUE
WRITE FOR NEW PRICE LIST — 1003 RALAND AVE. BALTO. MD.

AEROTECH Inc
Aeronautical Engineering Design, Stress Analysis, Reports, Appraisals.
Complete Testing Facilities
Moline, Ill.

WHERE TO FLY

California

PACIFIC TECHNICAL
SAN DIEGO UNIVERSITY CALIF.
HOME STUDY COURSES
IN
AIRPLANE DRAFTING
WEEMS SYSTEM OF NAVIGATION
AIRPORT MANAGEMENT
AERONAUTICAL ENGINEERING
GROUND SCHOOL OF AERONAUTICS
PRACTICAL SHOP WORK
FLIGHT INSTRUCTION
Affiliated with T. C. Ryan Flying School
Write for Catalog

California

MAHONEY-RYAN AIRCRAFT CORP'N

Owners of Ryan Airlines and Ryan Flying Co.

Builders of Col. Lindbergh's *"Spirit of St. Louis"* give complete flying instruction the entire year. Students have an opportunity to study factory, field and airline methods.

SAN DIEGO, CALIFORNIA

California

LEARN AVIATION with RYAN

The ONE School that gives COMPLETE quality training. Specializing in long, thoro Ground & Air courses producing experts and commercial pilots.

San Diego has perfect flying weather year 'round. Greatest continuous flying activities of any city in the United States.

It Means Something to be a Ryan Graduate

Send for Descriptive Catalog.

T. C. RYAN FLYING SCHOOL

Gentlemen: Please send me your descriptive catalog.

NAME .....

ADDRESS .....

3366 BARNETT AVENUE SAN DIEGO CALIFORNIA

California

Western College of Aeronautics

154 W. Slauson Ave. Los Angeles, Calif.

One of the finest technical and practical air courses in the world

The Western Course equips you for positions of executive capacity

Engineering Designing Flying

Licensed Pilots Send for catalog

District of Columbia

Potomac Flying Service

School of Aviation

Hoover Field, Washington, D. C.
COMPLETE FLYING AND GROUND COURSES
Individual Attention—Easy Payment Plan — Modern Equipment — Military Trained Pilots—Washington's Oldest and Best Flying Field
Largest Passenger Carriers in U. S.

Florida

LEARN TO FLY in the South THIS WINTER!

The South's outstanding aviation school offers you ideal flying weather, latest type Travel Air Planes and a thorough course of instruction under recognized experts. Decide now to learn to fly—write for details and list of books recommended for preliminary study.

McMULLEN AVIATION SCHOOL
TAMPA, FLA.

Georgia

PITCAIRN AVIATION of GEORGIA, Inc.

10-HOUR FLYING COURSE, conducted at Candler Field, Atlanta, Ga., a 4-way flying field. All-year-round school employing modern flying equipment including Pitcairn Orowings. No liability bond required.

Write for Details

Land Title Building
PHILADELPHIA

Illinois

Learn to Fly at a Midwest Airways Corporation School

Under the direction of John H. Livingston

Three large Airports in the central west—at Aurora, Ill., Monmouth, Ill., and Waterloo, Iowa.

We are training students to fly because we need pilots for the planes we sell.

Largest distributors of commercial aircraft in the central states.

MIDWEST AIRWAYS CORPORATION
Waco and Ryan Distributors

LEARN TO FLY
BY ENROLLING IN ONE
OF THE SCHOOLS LISTED ON
THESE PAGES

Louisiana

Be a Licensed Pilot



SOUTHERN AERONAUTICAL SERVICE

605-7-9 AUDUBON BLDG.
New Orleans, La.
The Best Aviation School in the South

Maryland

REDUCED RATES
For Flying Instructions Now Offered to Prospective Students

Our price for complete course will enable you to save enough to pay for your board and lodging. Only modern equipment used. Wacos and Eaglerocks. School and field located near Baltimore.

THE STEINMETZ ENGINEERING CO.
717 W. North Ave. Baltimore, Md.

Maryland

Learn to Fly in Modern Planes at
TRED AVON FLYING SERVICE, INC.
Easton, Maryland
THE PERFECT FLYING COUNTRY
Complete 10 hour course including solo and ground course, $200.00.
10 and 50 hour solo courses at reasonable rates.
Board and lodging near field for $10.00 a week.
Write for Details

Missouri

PARKS AIR COLLEGE



Complete flying and ground courses under licensed transport pilots. New Travel Airs with OX5, Whirlwind, and Caminez motors. Send for free copy of "Skyward Ho!" our profusely illustrated catalog.

PARKS AIR COLLEGE
294 Ms. Theo. Bldg.
St. Louis, Mo.

Nebraska

Nebraska's Largest Flying School

subsidiary

MORTON AIRCRAFT, INC.

Dealing with every phase of Aviation, Solo and Advanced Training, Ground Mechanics, with Factory Building and Repair advantages at Airport. Write for details.

GRAND ISLAND FLYING SCHOOL
GRAND ISLAND, NEBRASKA

WHERE TO FLY

New Jersey

NEWARK AIR SERVICE
INC.

LEARN TO FLY!

Six new ships. Students trained by expert instructors having at least 10 years' active flying experience. Rates moderate, no bond for solo. Most conveniently located air port in metropolitan area. 30 minutes from N. Y. C. Take tube to Newark and No. 4 bus to

NEWARK METROPOLITAN AIR PORT
Newark, N. J.
Write Capt. J. O. Donaldson at above address
Telephone: Mulberry 1310

New York

FLY!
Licensed Planes
Licensed Instructors
Modern Equipment
Write for Information and Catalogue

Barrett Airways, Inc.
BEDFORD ROAD (ROUTE 22)
Armonk, New York
Tel. Armonk Village 1564
N. Y. Office—Tel. JERome 7745
"In the Heart of Westchester County"

New York

AVIATION ENGINEERING SCHOOL
Tel Circle 1010
225 West 57th St., New York City
Flying Instruction on New Planes

AVIATION:—If it is worth learning—learn it right. Complete, practical training in every branch of aeronautics. We train you for all government licenses. Day and Evening Classes.

New York

Learn to Fly Now
Have your license by spring

Solo	$150
Private Pilot time	250
Limited Commercial	450
Mfg. Design and Welding	150

Hogan-Moyer Aircraft Corp., Syracuse, N. Y.

New York

CURTISS FLYING SERVICE, Inc.
Clinton Road Garden City, N. Y.
In 1927 this Company flew more than 365,000 miles, carried 10,700 passengers, and graduated 224 flying students.
Air fleet of sixteen planes; equipment and personnel licensed by Department of Commerce. Phone Garden City 2508.
Write for Flying School Booklet

Advertise Services and Products in the Aircraft Service Directory

North Carolina

PITCAIRN AVIATION of NORTH CAROLINA, Inc.

10-HOUR FLYING COURSE, conducted at the Greensboro Municipal Airport, Friendship, N. C., a 4-way flying field operated by this Company. All-year-round school employing modern flying equipment including Pitcairn Orowings. No liability bond required.
Sales Agents for Challenger Airplanes
Write for Details
Land Title Building
PHILADELPHIA

Ohio

FLYING SCHOOL OF THE
EMBRY-RIDDLE
AIRMAIL - CONTRACTORS
LUNKEN AIRPORT, CINCINNATI, O.

Thorough, painstaking methods are responsible for this school's country-wide reputation. Leading figures in aviation send students here. Ten hours minimum instruction, 20 if necessary for 1 hour guaranteed solo. No bond, only modern planes. Noted pilot-designers conduct ground school.
Illustrated Folder on Request
- Distributors - FAIRCHILD

Ohio

LEARN TO FLY
RAVENROCK AIRPORT
PORTSMOUTH, OHIO

Where you will have the advantage of having competent instructors with long experience. Flying instruction under the supervision of "Pat" Love, veteran flier. Up-to-date equipment of "Waco" and "American Moth" planes.
We guarantee to teach you to fly—giving you at least ten hours in the air. No liability bond required for when we turn you loose we know you can fly.
Complete course, including ground school, $200 for 10 hours; $500 for 50 hours; $1500 for 200 hours.
PORTSMOUTH AERO CORPORATION

Pennsylvania

PITCAIRN AVIATION of PENNSYLVANIA, Inc.

10-HOUR FLYING COURSE. 4-way flying field, at Willow Grove, Pa., the largest in the East, in midst of ideal flying country. All-year-round school. Modern flying equipment, including Pitcairn Orowings. Reasonable board and lodging near field. No liability bond required.
Write for Illustrated Booklet
Land Title Building
PHILADELPHIA

Pennsylvania

KEYSTONE AIRPORT
"FLYING COLLEGE"

Where you really learn to Fly. Primary and Advanced Flying Instruction Accompanied by Ground School. We teach Navigation, Meteorology. New Production Planes. Instructors are Transport Pilots Write for Particulars.
KEYSTONE AIRPORT
EBENSBURG, PA.

South Carolina

PITCAIRN AVIATION of SOUTH CAROLINA, Inc.

10-HOUR FLYING COURSE, conducted at the Spartanburg Municipal Airport, Spartanburg, S. C., 4-way flying field operated by this Company. All-year-round school employing modern flying equipment, including Pitcairn Orowings. No liability bond required.
Sales Agents for Challenger Airplanes
Write for Details
Land Title Building
PHILADELPHIA

Texas

T. A. T. FLYING SCHOOL, Inc.
A Division of
TEXAS AIR TRANSPORT, Inc.
Air Mail Contractors—Cam 21-22
All Instruction Under Personal Supervision of U. S. Transport Air Mail Pilots

Instruction on all types of ships. Extensive ground school courses, each of which is taught by specialists. Entire school recognized and approved by U. S. Department of Commerce. A year 'round training school located at the air terminal of the Sunny South.

For information, address T. A. T. FLYING SCHOOL, Box 746, Ft. Worth, Texas.

Texas

LEARN TO FLY THIS WINTER ON LOVE FIELD WITH TEXAS DISTRIBUTORS
TRAVEL AIR and MONOCOUPE
Solo and Advanced Courses
TRAVEL AIR WAYS CO.
LOVE FIELD - DALLAS, TEXAS

Virginia

PITCAIRN AVIATION of VIRGINIA, Inc.

10-HOUR FLYING COURSE, conducted at Richmond's Municipal Airport, Fort Lee, Va.; a 4-way flying field operated by this Company. All-year-round school employing modern flying equipment including Pitcairn Orowings. No liability bond required.
Write for Details
Land Title Building
PHILADELPHIA

CLASSIFIED ADVERTISING

10 cents a word, minimum charge $2.50, payable in advance. 15 cents a word if box is used.
Address replies to box numbers, care AVIATION, 250 W. 57th St., New York

FOR SALE

FOR SALE: Lincoln Page, dual control, OX-5, turns 1425 ground, 125 hours. Extras OX-5 motor completely overhauled propeller, wheel, tire, barrel, overhead and many other OX-5 parts. LS-5, 180 Hisso "E," turns 1600 ground. Just overhauled, only four hours in the air. Equipped with landing and navigating lights, Extra, Hisso "A" motor completely overhauled, wheel, two 900x200 tires, two magnetos, pistons, propeller Hamilton 751, valves, springs, in fact every extra for a flying circus. Both ships just recovered and have C's. Guaranteed as good as new and looks like new. Will guarantee all the above in first class shape. Best bid over $5,000.00 takes all the above. Both ships are ready to flyaway. Bids close February 15th. P. O. Box 229, Omaha, Nebr.

EAGLEROCK, NEW OX-5 motor, less than 100 hours, practically new, exceptionally attractive price. May be purchased on time payment plan. Farrell, 1728 First Ave., New York City.

HEAVIER MAIL loads necessitating larger equipment release for immediate cash sale: Fokker J-5 Universal, Boeing J-4 training, Travel Air J-4 three-place, Wright motor parts. Miscellaneous equipment, steel and wood propellers. Price on request. Pacific Air Transport, Inc., Oakland, Calif,

PARACHUTE FOR sale: 28 foot Irving back pack parachute, guaranteed as good as new. Jumped only a few times. Cost new $375.00. Priced now $250.00. Written guarantee. Box 1146, AVIATION.

CIRRUS ENGINE Mark II 80 hp., four-in-line. World's most efficient light engine. New import. Immediate delivery, crated Curtiss Field, $1,800.00. Wire Air Associates, Inc., 535 Fifth Ave., New York City.

MACHINE SHOP service on OX-5's. Cylinders reground, new pistons, pins and rings. Graphite guides and inserted seats installed, Oversize pins installed in valve actions. Main and connecting rod bearings line reamed. All work guaranteed. New OX-5 parts. Write for complete circular. Heckman Machine Works, 4026 West Lake St., Chicago, Ill.

METEORPLANE NEW model M-T-2, demonstrator on field. Now booking a few orders for quick delivery. Wire or write with $350.00 deposit and be assured of delivery for early spring. Send 10c. for circular and neat flying toy plane. Dilts S. McHugh, Liberal, Kans.

FOR SALE: New jumping balloon. A wonderful attraction for drawing crowds. Manufactured by Meadowcroft Balloon Co. Guaranteed in perfect condition, Cost $700.00 new. Wire us your offer. Chesapeake Aircraft Co., Logan Field, Baltimore, Md.

FOR SALE: New monocoupe, perfect condition. Never been flown. $2,100.00 our field. Are taking on new line of planes. Chesapeake Aircraft Co., Logan Field, Baltimore, Md.

FOR SALE: New monocoupe, about 12 hours, perfect condition, $2,370.00. Good used OX-5 motors, $370.00. Radiators, instruments, etc. Edwards, Brice & Karr, P. O. Box 385, Bowie, Texas.

FOR SALE: Set of Standard J-1 clipped wings, wood, fittings, struts OK flight, minus one wire for rigging. Price $150.00 crated, H. Alsop, 31 Clifford St., Hartford, Conn.

FOR SALE: One Gnome 165 hp., air-cooled, brand new, $75.00 in Hartford. Never run in service. H. Alsop, 31 Clifford St., Hartford, Conn.

IDEAL SITE for aeroplane manufacturing plant located in southern city. Two buildings five and six thousand square feet, and also suitable office. Year 'round climate and good labor conditions. One-half mile from landing field. Aerial photos on request. W. T. Betts, Agt., Chester, S, C.

FOR SALE: Glenn Martin biplane, also monocoupe both slightly damaged, less motor, propeller. Rebuilt, overhauled and good used OX-5 motors reasonable. We trade guaranteed rebuilt OX motors like new for $200.00 and your old motor. P. O. Box 4111, Tampa, Fla.

J-1 STANDARD OX-5, new covering last fall, seven coats dope, dual control. Original with steel tubing struts to replace cabane. Duco job on fuselage and tail group. Good wood. Kept in hangar. $1,000.00 flyaway, Earl Watson, Morrison, Ill.

FOR SALE: One new 80 hp., LeRhone absolutely new and fully complete including tools, $125.00. One new 100 hp., Gnome, fine condition and complete, $75.00. J. T. Potts, care Clyde Steamship Co., Jacksonville, Fla.

WRITE ABOUT aircraft supplies and overhauled model A Hisso motor complete with hub and exhaust manifolds, ready to install. No junk. $450.00 crated. J. L. Schroeder, Harrisburg Blvd., Houston, Texas.

FOR SALE: Waco, 1928 model 10, OX-5. Run 28 hours. Perfect throughout, Some extras, $2,450.00. C. Dallas, Buffalo, N. Y., Airport.

FOR SALE: One set complete Waco 9 wings including balanced ailerons in perfect condition. Will sell set complete or separate. E. A. Forner, 503 Madison St., Jackson, Mich.

FOR SALE: Ryan Brougham Wright Whirlwind engine. Fine condition. Only 200 hours. Privately owned. Price $9,000.00. Address C. F. Lytle, Mexia, Texas.

ATTENTION AVIATORS: Valve guides installed on OX cylinders, $1.50 per guide. Removable valve seats installed, $1.00, Descriptive literature upon request. All work guaranteed. Illinois Flying Co. New Location, 4 West 4th St., Sterling, Ill.

FOR SALE: OX-5s rebuilt, refinished and steel fuselage new. Wings and fuselage designed and built to order. Rebuild wings, planes, motors. We refinish all motors. Kent Kronsbein, 2301 Calumet Ave., Chicago, Ill.

FOR SALE: Waco Whirlwind, four months old. Run 36 hours. Loaded with extras. Finished in Duco red. Brakes. Had best of care, Will sacrifice. Take other ship in trade. C. Dallas, Buffalo, N. Y., Airport.

REBUILT OX-5 special, $425.00. Will consider Hisso 180, 220 or 300 hp. in trade. Motor is practically new. Will give a guaranteed performance. For details Geo. H. Eiermann, 3812 N. Kildare Ave,, Chicago, Ill..

STANDARD J-1 with model A Hisso motor. Ship in good condition. Enclosed cab. Motor excellent. Many accessories. Sacrifice for $850.00 cash. R. G. Diehl, Harvey, N. Dak.

FOR SALE: Waco 10, Curtiss OX-5 with Kirkham valve action and high compression pistons, cost $300.00 extra, Hamilton propeller. Ship brand new; only 19 hours. Owner going to Europe. Will sacrifice $2,700,00. See Martins, Hangar 25, Curtiss Field. N. Y.

REBUILT OX-5 motors like new, $375.00. Used OX-5 motors, $275.00. Like new cylinders, $15.00, slightly used $10.00. OX parts cheap. Jostes Aircraft Supply Co., St. Louis, Mo.

FOR SALE: OX-5 Hammondsport motor, brand new, $900.00. Thoroughly rebuilt OX-5, $550.00. Air King, less motor and propeller, $600.00. Waco 10, OXX-6 motor, Scintilla magneto, fine condition, $2,150.00. New York Aircraft Distributors Inc., Curtiss Field, Garden City, L. I.

CURTISS JN-4D dual control. A good flying airplane priced for quick sale. Complete with OX-5 motor $750.00. Will deliver for expenses. Wisconsin Air Lines, South Sheridan Road, Kesnosha, Wis.

FOR SALE: Three OX-5 Waco 10s; one OX-5 Jenny excellent condition, also Canuck Standard. Exceptional bargains. A. Nordstrom, 438—48th St., Moline, Ill.

COMPLETE REBUILT OXX-6, new magnetos, all new bearings, rings and overhead, $350.00. Electric starter and lots of new spares, $700.00. Box 1161, AVIATION.

FOR SALE: New Cessna monoplane Whirlwind engine. Bought for transcontinental race but not entered. With special equipment sells for $9,500.00. First $7,500.00 takes it. Owen Haugland, Ranger, Texas.

AMERICAN EAGLE, extra nice OX-5 motor, slightly used. Traded in on larger plane. You can't tell this one from new. $2,150.00. Waco 9, in excellent condition with OX-5 motor, $1,150. American Eagle Aircraft Corp, 2800 East 13th St., Kansas City, Mo.

FOR SALE: One Gnome 160 hp., rotary airplane motor brand new ignition equipment included. Also one Dixie magneto, six cylinder, new. Make an offer. P. O. Box 71, Sheppton, Pa.

FOR SALE: New or used Aeromarines, model 39B. Seaplanes or landships with 180 Hisso or OXX-6 Curtiss or without motors. Also lot of spares to ships and motors. Box 1163, AVIATION.

POSITIONS WANTED

PILOT 2,000 hours, all types, desires steady position with progressive company. Thorough mechanic. R. Field, 134 N. Hancock, Madison, Wis.

POSITION WANTED by thoroughly experienced pilot. Can furnish excellent references as to character and ability. Box 1148, AVIATION.

LIMITED COMMERCIAL pilot with 75 hours solo on Travel Airs, Wacos and Eaglerocks desires position with private owner or reliable coneern. Can give excellent reference. Walter Zimmerman, Lock Haven, Pa.

WANTED: JOB in factory or airport as helper. Will work free first two months. Box 1151, AVIATION.

TRANSPORT PILOT, engine and airplane mechanic. Barnstorming, cross-country and student experience. Married. Age 30. Desire new connection. Box 1153, AVIATION.

EX-ARMY PILOT, West Point graduate, experienced on all service-type ships, night flying, wishes connection. Box 1154, AVIATION,

EXPERIENCED AERO designer desires position with a well financed firm. Understands hauling complicated structures by least work and three moments. Box 1155, AVIATION.

LIMITED COMMERCIAL pilot, 150 hours cross country and barnstorming experience. Will work cheap. Box 1157, AVIATION.

TRANSPORT PILOT with nearly 1,000 hours desires connection with reliable concern. Norman Smith, 5273 Ridge Ave., Philadelphia, Pa.

SITUATION WANTED: Parachute leaps, wing walking, aerial trapeze. Want contract for coming season. A good worker. Box 1158, AVIATION.

EX-ARMY PILOT, college graduate, executive ability, formerly Royal Flying Corps and U. S. Air Service, flying experience abroad and U. S., desires connection. Box 1164, AVIATION.

EXPERIENCED YOUNG man stenographer and bookkeeper desires position with aircraft firm. Desire to work up and learn some part of business. Box 1165, AVIATION.

MISCELLANEOUS

$50.00 REWARD: Irving pongee seat pack parachute No. 10412 stolen. R. O, Bone Co., Inglewood, Calif.

ARE YOU anxious to become a licensed pilot, but have not the means? Write F. A. Sanders, E 1724 Gordon, Spokane, Wash.

SLIGHTLY CRACKED Standard J-1 less motor to trade for late model Ford. L. Martin, 2108 Windsor Ave., Waco, Texas.

STUDENTS: OPPORTUNITY become transport pilots. Advertiser will take three students for L. C., course (50 hours) at $675.00. Those showing merit will have chance to work and become transport pilots. Must start immediately. Located in east. Write or wire. New production jobs. Box 1162, AVIATION.

EQUIPMENT WANTED

WANTED: USED OX-5 motors or parts. Also OX-5 crankcases and OXX-6 crankcases. Box 782, AVIATION.

WANTED: LIGHT two-place plane. Less engine. Any condition. Not over $400. Give full particulars first letter. Frank Edwards, Chilliwack, B. C.

WANTED: USED Wright J-5 motor with propeller and starter. Erik G. Froberg, 2223—4th Avenue North, Seattle, Wash.

WANTED: PONTOONS for late model Fairchild or Mahoney. Give full description. Lowest price first letter. C. Bristow, 1406 Schilling Ave., Chicago Heights, Ill.

WANTED: NEW production ship in flying condition. Will trade even a Muscle Shoals lot valued at $1,750.00. Dr. Brandenburg, Robinson Bldg., Rock Island, Ill.

HELP WANTED

WANTED: BY major mail contractor—pilot with cross country night and bad weather flying experience. Those with less than 2,000 hours flying on larger equipment need not apply, Steady employment, good salary. Box 1091, AVIATION.

DRAFTSMAN LAYOUT with several years' aircraft experience. Apply Keystone Aircraft Corp., Bristol, Pa.

WANTED: SERVICE manager and chief mechanic for responsible progressive airplane dealer and operator. Pilot preferred. Write giving references. Salary $2,600.00 yearly to start. Box 1156, AVIATION.

ESTABLISHED CORPORATION requires the services of American aeronautical engineers, production managers, airplane and engine mechanics, instructors. Only experienced men needed. Box 1159, AVIATION.

CHECKER: EXPERIENCED on airplane design work. State age, experience and salary. Apply Keystone Aircraft Corp., Bristol, Pa.

Classified
Advertisements
Inserted in
AVIATION
Will Bring Results

Index to Advertisers

A
Addington Aircraft Co. ... 197
Aerotech, Inc ... 197
Air Associates, Inc ... 197
Aircraft Service Directory ... 197
Alexander Aircraft Co. ... 188
American Eagle Aircraft Distributors, Inc. ... 197
Anchor Post Fence Co. ... 186
Austin Co., The ... 191
Aviation Protection, Inc. ... 195
Aviators Post (American Legion) ... 190

B
Barber & Baldwin, Inc. ... 189
Barrett Co., The ... 151
Bendix Brake Co. ... 153
Berry Bros., Inc ... 183
Bethlehem Steel Co. ... 181
Black & Bigelow, Inc. ... 197
Boston Auto Gage Co., The ... 197
Bourdon Aircraft Corp. ... 195
Bunnell Aircraft Radio Co. ... 188
Box 1160 ... 192

C
Cheney & Son, S. ... 194
Cie Internationale Aeronautique ... 197
Classified Advertising ... 200-201
Cleveland Pneumatic Tool Co. ... 189
Cleveland Tool & Supply Co. ... 197
Consolidated Instrument Co. of America, Inc. ... 190
Continental Aircraft Corp, ... 192
Crawford Airplane Co. ... 197
Crescent Panel Co. ... 194
Curtiss Aeroplane & Motor Co., Inc. ... 154

E
Edo Aircraft Corp. ... 195
Electric Storage Battery Co., The ... 185
Embry-Riddle Co. ... 191

F
Fairchild Aviation Corp. & Subsidiaries ... 192
Flottorp Propeller Co. ... 197
Flyers, Inc. ... 197
Frank, K. G. (Siemens & Halske) ... 195

H
Hamilton Aero Mfg. Co. ... 190
Hartshorn Co., Stewart ... 191
Haskelite Mfg. Corp. ... 187

I
Ihling Bros. Everard Co, ... 190
Ireland Aircraft, Inc. ... 188

K
Kinnear Mfg. Co. ... 186
Kreider-Reisner Aircraft Co., Inc. ... 190

L
Laird Airplane Co., Inc., E. M. ... 184
Ludington Philadelphia Flying Serv., Inc. ... 197

M
Macwhyte Co. ... 195
Mahoney-Ryan Aircraft Corp. ... 202
Meyrowitz Inc., E. B. ... 194
Miller, Wendell P. and Associates ... 193
Mohawk Aircraft Corp. ... 182

N
Nicholas-Beazley Airplane Co., Inc. ... 194
Notrus Hangar Corp. ... 192

O
Oppenheimer, Carl, David ... 197

P
Paragon Engineers, Inc. ... 197
Parker Appliance Co. ... 193
Paxton, Frank Lumber Co. ... 197
Perry-Austen Mfg. Co. ... 194
Phenix Aircraft Products Co. ... 197
Pioneer Instrument Co. ... 197
Plycor Co., The ... 195
Posey & Co., J. V. G. ... 197
Pratt & Whitney Aircraft Co. ... 156

R
Russell Mfg. Co. ... 197

S
Scintilla Magneto Co. ... 155
Service Steel Co. ... 193
Sherwin-Williams Co. ... 219
Showalter, Lloyd and Associates ... 197
Smith Welding Equipment Co, ... 189
Spencer-Turnbull Co. ... 197
Stalker, E. A. ... 197
Standard Oil Co. of N. Y. ... 152
Strauss & Buegeleisen ... 192
Swallow Airplane Mfg. Co. ... 191

T
Taylor Instrument Co. ... 193
Texas Pacific Coal & Oil Co. ... 150
Thompson, Hugh L. Co. ... 197
Titanine, Inc. ... 192

U
Union Special Machine Co. ... 193
U. S. Aviation Underwriters ... 191

V
Van Schaack Bros. Chemical Works, Inc. ... 193

W
Where to Fly ... 198-199
Wies, Geo, A., Inc. ... 197
Wright Aeronautical Corp. ... 220

HERE
we shall go on building good ships

It is called the new Mahoney-Ryan factory. We think of it as a pledge given permanent form in masonry and steel. It is a mile-stone in the march of a young industry now coming of age.

This modern, daylight plant adjoins Lambert Field, the great airport of St. Louis, Missouri. The site covers nine acres. Provides every known facility for the production of **trustworthy ships.**

And now in quantity production is the new Mahoney-Ryan Brougham, which will carry six in comfort and security when powered by the Wright Whirlwind J-6 engine, 300 horsepower, or five with the J-5 Whirlwind.

Built into this ship are the engineering principles proved sound in the world's greatest endurance flights. In cabin refinements, it approximates the luxury of a high-class motor car. It delivers ten miles to the gallon of gasoline and its safe cruising radius is eight hundred miles.

The Mahoney-Ryan Brougham takes off faster and lands slower, with its full load, than any other plane of its type. It is the only plane of its type with a service ceiling of over 16,000 feet. It is the only plane powered with one engine that has lifted a useful load of 2,500 pounds from a field 7,600 feet above sea level.

These facts have been demonstrated in open competition; they are beyond dispute. Because of these facts, the Mahoney-Ryan Aircraft Corporation builds and sells more Whirlwind cabin monoplanes than any other maker. This volume makes possible the attractive price.

Send for descriptive booklet, fully illustrated, which is gladly forwarded upon request.

AFTER completing his New York to Paris flight, Col. Lindbergh said: "I had what I regarded and still regard as the best existing plane to make the flight." The Mahoney-Ryan Brougham is a Sister Ship, further developed and refined, adapted to the most searching demands of commercial air travel or personal use. ***U. S. Department of Commerce Approved Type Certificate No. 25.***

Present representation includes these leading distributors:

AIRCRAFT & AIRWAYS OF AMERICA.*Pittsburgh, Pa.*
MASSACHUSETTS AIRWAYS CORP..*Springfield, Mass.*
CAPITOL AIRWAYS, INC.....*Washington, D. C.*
BUFFALO AIRCRAFT DISTRIBUTORS..*Buffalo, N. Y.*
MENEFEE AIRWAYS, INC.....*New Orleans, La.*
KNAPP FLYING SERVICE.....*Ypsilanti, Mich.*
LOUISVILLE POINT LUMBER CO....*Louisville, Ky.*
CAPITOL AIRWAYS, INC.....*Indianapolis, Ind.*
MIDWEST AIRWAYS, INC.....*Milwaukee, Wis.*
NORTHROP AEROPLANE CO....*Minneapolis, Minn.*
MIDWEST AIRWAYS CORP'N.....*Aurora, Ill.*
BEACON AIRWAYS OF AMERICA, INC.....
.....*Kansas City, Mo.*
INTERSTATE TRANSIT LINES.....*Omaha, Neb.*
RAPID AIR-LINES, INC.....*Rapid City, So. Dak.*
SCENIC AIRWAYS, INC.....
.....*Phoenix & Grand Canyon, Ariz.*
MISSION AIRPLANE SERVICES...*San Antonio, Tex.*
DIXIE AVIATION COMPANY.....*Fort Worth, Tex.*
THOMPSON FLYING SERVICE.*Salt Lake City, Utah*
MUTUAL AIRCRAFT CORP'N....*Los Angeles, Calif.*
RANKIN FLYING SERVICE.....*Portland, Oregon*
M. A. ZUNIGA.....*Central America*
COUNT G. BONMARTINI.....*Rome, Italy*
AIRGOLD, LIMITED.....*Sidney, Australia*

In territory not yet taken up, we offer an attractive proposition to distributors qualified to handle the line. Correspondence invited.

The MAHONEY – RYAN AIRCRAFT CORP'N

Anglum (St. Louis County) Missouri

Owners of Ryan Air Lines ***San Diego, Cal.*** **and Ryan Flying Company** ***St. Louis, Mo.***

THANK YOU *for mentioning* AVIATION

AERONAUTICAL ENGINEERING

Supplement of

AVIATION

CONTENTS

Proportioning the Plane for Lateral Stability
By B. V. Korvin-Kroukovsky

The Modern Aerodynamic Theory in Design
By Ivan H. Driggs

Thrust Horsepower and Engine Efficiency
By Lieut. Comdr. J. M. Shoemaker

PUBLISHED EVERY MONTH

January, 1929

The Modern Aerodynamic Theory in Design

By IVAN H. DRIGGS
Vice Pres. & Mgr. Driggs Aircraft Corp.

IN the last few years the Prandlt Theory has come to be recognized as a very useful principle in the hands of the airplane designer or technician. However, full use is not generally made of the simplifying formulae resulting from it. The average person is too prone to hold to old ideas. The writer feels that a fuller use and understanding of this theory will greatly clarify the thinking upon the subject of the factors that affect airplane performance.

This article is written to assist in the above undertaking and it will set forth a few formulae that have resulted from the study of the subject. Part of these expressions are original and some are due to other writers. No attempt will be made to prove the truth of the general theory of Induced Drag as first suggested by Dr. Prandtl. The reader is referred to any modern text book on this subject for the general proof.

According to Dr. Prandtl the drag of an airplane wing in a perfect fluid, i. e. a fluid without viscosity, is given by

$$D = L^2/\pi q b^2 \qquad (1)$$

Where D = drag
L = lift
$q = \frac{1}{2}\rho V^2$
b = span

He also states that the same formula may be applied to the multiplane if a correction factor to be applied to the value of the span, b^1. This correction factor is greater than unity so that the value of b used in the above expression is greater than the actual span of the cellule in the case of the multiplane. The value of this factor is about 1.1 for the average biplane, so that

$$b = 1.1\ b^1$$

where b^1 = actual span of cellule.

Equation (1) may be expressed in the form of coefficients as follows,

$$C_i = C_l^2/R \qquad (2)$$

Where C_i = induced drag coefficient
C_l = lift coefficient
R = aspect ratio = b^2/S
S = total wing area

expressed in engineering units of lb. per sq. ft.-mi. per hr. equation (2) becomes

$$K_{xi} = 125\ K_y^2/R. \qquad (2a)$$

In figure 1 has been plotted the above expression for wing drag as found by Prandtl and the actual measured drag of the Clark Y aerofoil. It can be seen that the theoretical and the actual curves disagree by a practically constant amount below the angle of maximum lift. This does not necessarily prove an error to the theory but rather that all the facts are not considered by it. In the mathematical treatment from which Dr. Prandtl derived expression (1) it was necessary to assume a fluid without viscosity. This assumption is not strictly true in the case of the atmosphere and consequently we have the difference as shown by Fig. 1.

By testing a number of aerofoils of different aspect ratios but of the same section it has been found that the difference above noted is in all cases the same. This quantity is then a function of the wing section only and is called section drag.

One of the first uses to which equation 1 was put was the correction of wind tunnel results of one aspect ratio to apply to a cellule of another ratio. This correction is done by means of the following equation, correcting from aspect ratio A to aspect ratio X,

$$C_{dx} = C_{da} - C_l^2/\pi(1/A - 1/X) \qquad (3)$$

or $$(K_x)_x = (K_x)_a - 125\ K_y^2(1/A - 1/X) \qquad (3a)$$

Equation (3) is now the standard method used by practically everyone to transfer the wind tunnel results at one aspect ratio to any other, or to correct for biplane effect. The value of the aspect ratio to be used in the above expression is *not* the span divided by the chord but the expression,

$$R = (kb^1)^2/S.$$

When we consider the complete airplane we must introduce one more division of the drag, namely that due to the fuselage, landing gear, tail surfaces and structural bracing. This resistance has been called very properly the parasite drag since it produces no useful work. We then have three parts to the resistance of the complete airplane,

1. The induced drag = $L^2/\pi q b^2$.
2. Wing section drag = $C_s qS$.
3. The parasite drag = $C_p qS_p$.

The wing section drag and the parasite drag are similar and may be grouped together under parasite as a division representing the difference between the total drag and the induced drag. That is,

$$D_t = L^2/\pi q b^2 + 1.28 q S_p \qquad (4)$$

where the value of the area, S_p, is made up of the wing section drag as well as the structural parasite.

In Fig. 2 we have plotted the polar curve for the VE-7 airplane as determined from full flight test. This curve shows that the value of S_p is practically constant throughout the range of angles investigated. The dotted curve is given to show the actual deviation from the above assumption. It is true that all airplanes may not show such agreement, but the VE-7 is a fairly representative type and there are probably other airplanes that are considerably better in this respect. In all cases of full flight analysis that the writer has carried out the agreement between the two curves has been equally as good and better in a few cases.

This discussion has been given to show that the prin-

ciples given in the preceding paragraphs very closely follow the facts as shown by the full flight polar of a specimen airplane. A great number of the engineering formulae used every day show discrepancies from the actual facts as great, if not greater, than those shown in this case. Their simplicity and ease of application justify them. We believe that in this case, also, the simplicity of equation (4) and the great number of laws that may be derived from it fully justify and recommend the above assumptions for general use.

If we differentiate equation (4) with respect to q and place the result equal to zero for a minimum we find,

$$dD_t/dq = 1.28\ Sp - L^2/\pi q^2 b^2 = 0$$
$$1.28qS_p = L^2/\pi qb^2.$$

This demonstrates a very interesting and useful principle, i.e., *at the velocity of minimum drag the induced drag equals the parasite drag.*

$$q(\text{min. drag.}) = L/2b\sqrt{S} \qquad (5)$$

$$V(\text{min. drag}) = (14\sqrt{L}/\sqrt{b}\sqrt[4]{S_p}). \qquad (5a)$$

Substituting in equation (4) we have the minimum drag.

$$D_t(\text{min.}) = 1.28L\sqrt{S_p}/b. \qquad (6)$$

Since the value of ρ, the density of the air, does not occur in equation (6), the minimum drag is independent of altitude, and depends only on the weight (equivalent to L), the parasite area and the span.

From equation (6) we may find the value of the maximum L/D. Since the weight is constant and equals L, the max. L/D is given:

$$L/D(\text{max}) = .782b/\sqrt{S_p}. \qquad (7)$$

This is a very useful expression and can best be remembered as:

The maximum L/D equals three-fourths of the equivalent wing span divided by the square root of the parasite area in sq. ft.

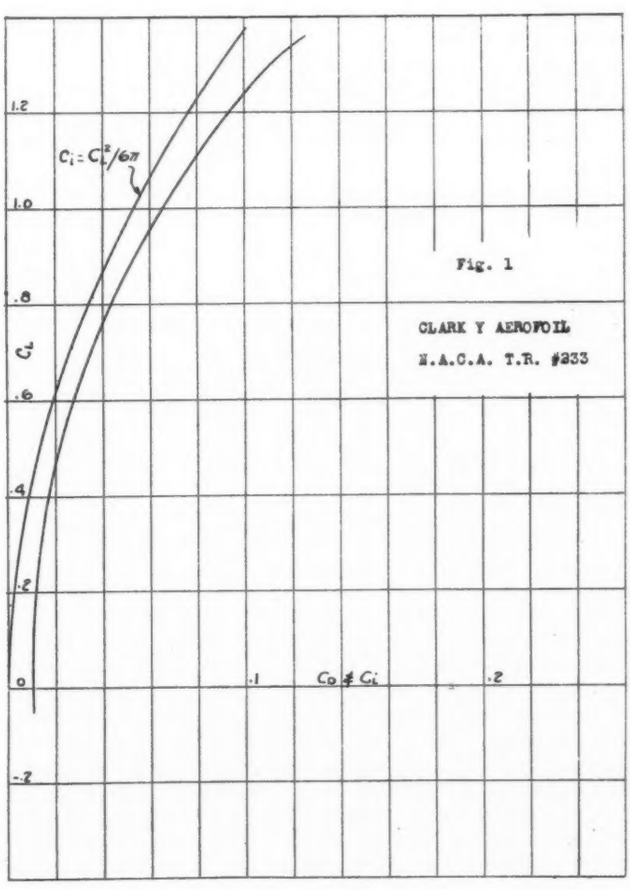

To show the type of results obtained we will take the following example:

Let $b = 30$ ft.
$S_p = 5.5$ sq. ft.
Then $L/D(\text{max.}) = .782 \times 30 \div 2.34 = 10.$
If $S_p = 9$ sq. ft.
$L/D(\text{max.}) = .782 \times 30 \div 3 = 7.8$

Both of the above results are very reasonable, in fact the writer has checked a great number of model tests and found surprisingly close results between all of them and the above equation.

Formula (7) is especially useful in connection with calculations using Breguet's expression for range or endurance, as well as the equations for performance developed by Lieut. Walter S. Diehl.

The methods employed above are capable of demonstrating some very interesting rules for use with the design of gliders or soaring machines. Equation (7) of course is directly applicable to the case of the glider in which case the problem is to glide the greatest distance from a given starting point. Provided that sufficient area is provided that the speed given by formula (5) can be attained at a lift coefficient not too close to the maximum, the maximum distance that can be obtained by any glider from a given starting point will depend upon the span and parasite only and is given by

$$D = .782\ Hb/\sqrt{S_p} \qquad (8)$$

Where D = Max. distance from starting point to end of flight,
H = Height of start over end of flight.

If we consider an airplane gliding downward at a speed V with a gliding angle of α, and if u equals the speed of vertical descent

$$u = V \sin \alpha$$
or for small angles
$$u = V \tan \alpha$$
but $\tan \alpha = D/L$
therefore $u = VD/L$

Substituting the value of D_t from equation (4) and then differentiating the value of u with respect to V for a minimum, we find that the value of u is a minimum when

$$q = .289L/b\sqrt{S_p} \text{ in absolute units} \qquad (9)$$

$$V = 10.62\sqrt{L}/\sqrt{b}\sqrt[4]{S_p} \text{ engineering units} \qquad (9a)$$

Substituting equation (9) back into equation (4) and the expression for u we find the value of the minimum sinking speed,

$$u\ (\text{min.}) = 1.12\sqrt{L}\sqrt[4]{S_p}/\sqrt{\rho}\sqrt{b^3} \quad \text{absolute} \qquad (10)$$

$$u\ (\text{min.}) = 15.68\sqrt{L}\sqrt[4]{S_p}/\sqrt{b^3} \quad \text{engineering} \qquad (10a)$$

but $L = C_l Sq$ or $L = K_y SV^2$

Substituting in equation 9 we find

$$S = 3.46b\sqrt{S_p}/C_l \text{ absolute} \qquad (11)$$

$$S = .0088b\sqrt{S_p}/K_y \text{ engineering} \qquad (11a)$$

This is the area to give the soaring machine in order that the value of the sinking speed as given by formula (10) may be realized. The value of C_l or K_y used in the above expression should not be the maximum lift coefficient but should be somewhat less. The actual value used should be approximately at that point where the flow is still stable and the polar curve of the wing is still following the theoretical induced drag polar.

It is seen from the above expressions that the weight of a soaring machine does not determine its area nor does the weight enter into the expression for minimum sinking speed to a very large degree. This explains why some of the most successful German soaring machines have been somewhat heavy but have enormous spreads and are as clean as possible. The designers have sacrificed weight in building structures that are very clean and have

a very great wing weight due to excessive spans. The planes are made as clean as possible in order to keep down the necessary wing area as given by formula (11). The writer does not want in any way to give the impression that weight is not important in the case of a soaring machine, but rather that it is not of major importance. An example will be used to illustrate the point.

let $b = 40$ ft.
$S_p = 2$ sq. ft.
$C_l = 1.00$
$L = 400$ lb. $= W$
then $S = 3.46 \times 40 \times 1.414 \div 1.00 = 196$ sq. ft.
u (min.) $= 1.12 \times 20 \times 1.19 \div .0487 \times 253$
$= 2.16$ ft. per sec.

If the weight were increased 10%
u (min.) $= 2.27$ ft. per sec.

If the span is increased 10%, the area S is also increased 10% with an attendant increase in weight of say 3%, but the value of the minimum sinking speed becomes

u (min.) $= 1.12 \times 20.3 \times 1.19 \div .0487 \times 292$
$= 1.9$ ft. per sec.

This is a decrease of 12% in minimum sinking speed. If we were to go on increasing the span and therefore the area and weight we might finally reach a point where any further increase in spread would have such an effect upon the weight both due to increased area necessary and increased bending loads on the wings that no further decrease in the minimum sinking speed would result. Although no increase in S_p was assumed in the above comparison actually an increase of wing area would affect that quantity to some extent. This would naturally affect the optimum span that could be used for any problem.

The whole question of the design of the soaring machine as far as aerodynamics is concerned is well covered by the above equations. To the mind of the writer the problem of designing a soaring plane can be simply summarized as follows: Make the fuselage, landing gear and tail surfaces as light and as clean as possible. Choose an aerofoil with sufficient depth to provide strength and one with a small center of pressure movement. The drag coefficient of the aerofoil at a point somewhat less than the burble point should be as small as possible. With the above quantities determined apply equation (11) with an estimated value of the total parasite area and a chosen value of the span. From the area resulting check the value of S_p assumed and determine the total weight. Find the value of the min. sinking speed from (10). Repeat using various values for b and plot the results against b. From such a curve it can very readily be determined which is the best span to use and the minimum sinking speed corresponding.

The problem is more complicated than the simple statement above due to the fact that there is no simple mathematical formula that gives the variation of wing weight with span and area. The consideration of this problem is outside the scope of this paper, but the writer hopes to publish a paper at a later date that will consider this aspect of the question. At present it would be necessary to design and calculate the weights of the various wings under consideration.

In previous paragraphs we have considered the airplane as without power. It is possible to write an equation of power required for flight from equation (4) as follows:

$D_t = .637\, L^2/\rho V^2 b^2 + .637 \rho V^2 S_p$ rewriting equation (4)
$D_t = 125\, L^2/V^2 b^2 + .00327 V^2 S_p$ in engineering units.

Multiplying through by V and dividing by 550 in one case and 375 in the other we have the equation of power required,

$P_r = L^2/3Vb^2 + .00000872 V^3 S_p$ engineering units (12a)
$P_r = .00116 L^2/\rho V b^2 + .00116 \rho V^3 S_p$ absolute (12)

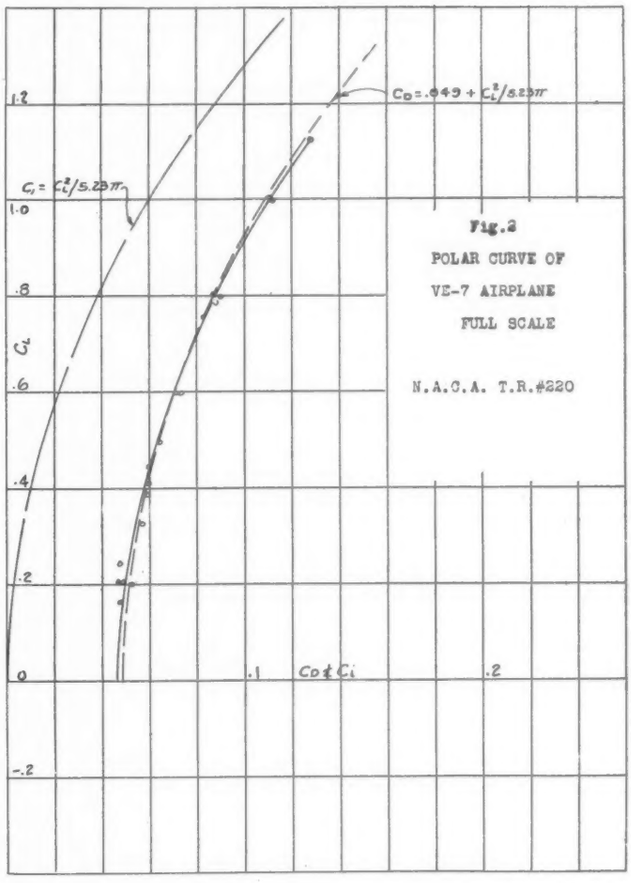

By differentiating the above expressions and placing the result equal to zero for a minimum we are able to obtain the speed that gives the least power as well as the value of the least power.

$dP_r/dV = .00348 \rho V^2 S_p - .00116 L^2/\rho V^2 b^2$
$.00116 L^2/\rho V^2 b^2 = .00348 V^2 \rho S_p$.

From the above equation it can be seen that *at the speed of minimum power the induced drag is three times the parasite.*

q (min. power) $= .289 L/b\sqrt{S_p}$ absolute (13)

V (min. power) $= 10.62\sqrt{L}/\sqrt{b}\sqrt[4]{S_p}$ (13a)

The above equations are the same as formulae (9). Therefore the speed at which we have the least power is the same at which the least sinking speed occurs.

P_r (min.) $= .0066\sqrt{L^3}\sqrt[4]{S_p}/\sqrt{\rho}\sqrt{b^3}$ absolute (14)

P_r (min.) $= .042\sqrt[4]{S_p}\sqrt{L^3}/\sqrt{b^3}$ engineering units (14a)

These formulae are very different from those generally used in showing the dependance of the power required upon the airplane characteristics. Generally, wing loading is considered the most important of those characteristics. In these formulae, however, the ratio of Weight to Span or span loading is the most important. The wing area enters into the equations in a secondary manner. It is still important for the best possible performance from a given set of conditions. Commonly the wing area is determined from the landing speed desired, with a tendency to increase that as much as possible in order to cut down the parasite. This policy is correct if a racing plane is desired, but for commercial uses where weight carrying and economy are desired better results may be obtained by the uses of the formulae given in this paper. In general all airplanes have too small a wing area for the optimum performance. To illustrate this point we have cal-

culated Table I. The values of the quantities given were taken from full flight tests, and therefore do not contain any element of speculation. In all cases the value of C_1 for equation (11) has been taken as unity, that is $C_1 = 1.00$. In a paper to follow it will be shown that practically all good aerofoils will give the minimum area according to formula (11) at the value of the lift coefficient.

TABLE I

Airplane	Actual Wing Area	Sp	b	k	Calculated S_w	Per Cent. Difference
IL-1	602	24.35	46.	1.083	850	41%
XB1-A	406	13.5	39.4	1.087	545	34%
PW-1	269	9.3	32.	1.085	366	36%
MB-3	250.5	8.9	26.	1.125	302	20%
IL-6	417	13.5	43.7	1.00	556	33%
VE-7	285	8.4	34.1	1.13	387	35%
D. W. C.	693	24.25	50.	1.112	948	37%
CO-1	480	18.5	55.75	.90	746	55%
CO-4	417	14.5	39.	1.05	540	29½%
D-7	236	8.6	25.3	1.06	272	15%
Messenger	152	5.5	20.	1.10	179	18%
DH-4	440	17.55	42.5	1.12	690	57%
PW-8	262	8.1	32.	1.08	340	30%
MB-2	1121	58.8	74.2	1.06	2090	86%

From the above table it can be seen that an increase of wing area would have allowed the value of the minimum power according to equation (14) to have been attained with a consequent increase in ceiling and minimum radius of turn, or in the case of the bombers, an increase in endurance. It is true that the maximum speed would be diminished by an increase in parasite due to larger wings, but the speed at altitudes would not have been materially affected. In fact a little closer study in the elimination of structural parasite would have been much more logical than the reduction of wing area to increase the high speed.

To summarize, we have found a rational formula for the drag curve of an airplane over the useful range, and from that have determined the minimum drag and consequently the maximum L/D, and the velocity at which they occur. From a resulting power equation we have also found the value of the minimum power and the speed at which it occurs. We have shown that the wing area should be determined from the speed of minimum power rather than the landing speed desired. We have also investigated the case of the glider and soaring speed and have given the minimum sinking speed for the soarer.

There are numerous other uses to which these equations may be put. By introducing an equation of Power Available we may easily find the maximum speed, the absolute ceiling, the minimum radius of turn, the maximum rate of climb at the ground and at any altitude, the maximum range and the maximum endurance. Also we may find a very rational way to classify different aerofoils and to choose the one best suited to a given problem. The writer plans to take up the additional problems in later papers.

TECHNICAL REVIEWS

Research Paper No. 35, Department of Commerce Bureau of Standards, by E. Z Stowell—This paper describes a method of transmitting unidirectional beacon signals for the aural or visual guidance of aircraft. The method consists in transmitting directive and non-directive fields simultaneously with the proper phase and amplitude relations between them to secure unidirectional transmission.

These signals increase the efficiency of the beacon from the power standpoint, reduce interference from other beacons, and reduce the number of radiated courses to one. It is believed that the polar characteristic of the radiated field is about the optimum for aircraft use.

National Advisory Committee for Aeronautics, Technical Report No. 294, The Measurement of Maximum Cylinder Pressures, by Chester W. Hicks.—The work presented in this report was undertaken at the Langley Memorial Aeronautical Laboratory of the National Advisory Committee for Aeronautics to determine a suitable method for measuring the maximum pressures occurring in aircraft engine cylinders. The study and development of instruments for the measurement of maximum cylinder pressures has been conducted in connection with carburetor and oil engine investigations on a single cylinder aircraft-type engine. Five maximum cylinder-pressure devices have been designed, constructed, and tested, in addition to the testing of three commercial indicators.

Values of maximum cylinder pressures are given as obtained with various indicators for the same pressures and for various kinds and values of maximum cylinder pressures, produced chiefly by variation of the injection advance angle in a high-speed oil engine. It is the high pressure of short duration that is most difficult to measure, because the time of its duration is so short that little work can be done to operate an indicator.

The investigations conducted thus far indicate that the greatest accuracy in determining maximum cylinder pressures can be obtained with an electric, balanced-pressure, diaphragm or disk-type indicator so constructed as to have a diaphragm or disk of relatively large area and minimum seat width and mass.

National Advisory Committee for Aeronautics, Technical Report No. 292, Characteristics of Five Propellers in Flight, By J. W. Crowley, Jr., and R. E. Mixson.—This investigation was made by the National Advisory Committee for Aeronautics at Langley Field for the purpose of determining the characteristics of five full-scale propellers in flight. The equipment consisted of five propellers in conjunction with a VE-7 airplane and a Wright E-2 engine. The propellers were of the same diameter and aspect ratio. Four of them differed uniformly in thickness and pitch and the fifth propeller was identical with one of the other four with the exception of a change of the airfoil section. The propeller efficiencies measured in flight are found to be consistently lower than those obtained in model tests. It is probable that this is mainly a result of the higher tip speeds used in the full-scale tests. The results show also that because of differences in propeller deflections it is difficult to obtain accurate comparisons of propeller characteristics. From this it is concluded that for accurate comparison it is necessary to know the propeller pitch angles under actual operating conditions.

National Advisory Committee for Aeronautics, Technical Report No. 300, The Twenty Foot Propeller Research Tunnel of the National Advisory Committee for Aeronautics, By Fred E. Weick and Donald H. Wood.—This report describes in detail the new propeller research tunnel of the National Advisory Committee for Aeronautics at Langley Field, Va. This tunnel has an open jet air stream twenty feet in diameter in which velocities up to 110 m.p.h. are obtained. Although the tunnel was built primarily to make possible accurate full-scale tests on aircraft propellers, it may also be used for making aerodynamic tests on full-size fuselages, landing gears, tail surfaces, and other aircraft parts, and on model wings of large size.

Thrust Horsepower *and* Engine Efficiency

By LIEUT. COMDR. J. M. SHOEMAKER
Bureau of Aeronautics, Navy Department, Washington, D. C.

THE several fundamental requirements of an aircraft engine have been discussed by many. The commonly accepted fundamental requirements, set down without reference to their relative importance, are:

(1) Minimum weight per hp.
(2) Maximum dependability.
(3) Maximum durability.
(4) Maximum economy.
(5) Minimum cost.
(6) Maximum ease of maintenance.

In addition to the above requirements, I should like to present for consideration a requirement which, for want of a better name, I have called "Maximum effective thrust per horsepower." This requirement has to do with the effective thrust available in an aircraft power plant.

An aircraft engine's direct output is brake horse power, while the output of the airplane power plant (which includes the propeller) is thrust horse power. The t.hp. developed is, of course, dependent on the efficiency of the propeller used. The propeller should be so designed as to deliver the maximum t.hp. possible with the given conditions. For purposes of comparison, it is assumed that this is the case,—that all the aircraft power plant types discussed have the most efficient propellers possible.

Aircraft engine design affects the effective thrust horsepower in two ways,—directly and indirectly. The direct effect is the speed of rotation at which the engine develops its power. The efficiency of a propeller increases with:

$$\frac{V}{ND}$$

where V=speed of advance of the aircraft, N=speed of rotation of the propeller and D=propeller diameter.

Hence, a high-speed engine with a propeller driven at crankshaft speed is less efficient than a slower turning propeller in the same aircraft. (The slow-speed propeller will be of slightly greater diameter, but the effect of change in r.p.m. will be much greater and hence the latter will have much more effect on propeller efficiency). A high-speed direct-drive propeller may also suffer a loss of efficiency due to excessive propeller tip speed. There is very little definite information as to the tip speed beyond which propeller efficiency falls off, but we have not been far wrong in assuming that it is in the neighborhood of 900 ft. a sec.

We see that the effect of high crankshaft speeds is to lower thrust horsepower directly due to its affect on peller

$$\frac{V}{ND}$$

and on propeller tip speed. Consequently, with high-speed engines it is necessary to incorporate reduction gearing between the crankshaft and the propeller shaft in order to reduce propeller speeds. This reduction gearing is an additional complication due to its reduction of engine durability, dependability, and ease of maintenance and increase in engine weight per hp. and engine cost. In addition, the transmission of engine b.hp. through gearing to the propeller shaft involves a slight loss in power, although this does not amount to more than a few per cent.

Until recently, American practice in the use of reduction gears was to employ a 2:1 reduction ratio. The latest ideas as to the choice of the proper reduction gear ratio take into account the increase in propeller diameter and propeller weight due to reduction gearing. The disadvantage of increased propeller weight is self-evident. Increase in propeller diameter, while maintaining the same ground (or structure) propeller tip clearance, not only requires additional weight of structure but the added length of supporting structure increases the parasite resistance of the aircraft. For these reasons, the latest practice in regard to reduction gear ratios is to choose one which will give a value of:

$$\frac{V}{ND} \text{ in excess of } 27$$

(where V=m.p.h., N=r.p.m. and D=ft.), and a propeller tip speed not greater than 900 ft. per sec. Working to these values will give a propeller efficiency somewhere near the maximum, and yet will insure that propeller diameter and weight are held to a minimum.

The indirect effect of engine design on the effective t.hp. of an aircraft power plant is the drag (air resistance) of the engine as installed. The thrust of the propeller overcomes the drag of an aircraft, of which drag that due to the engine is an important component. So if the engine is of such a shape or size that its inherent air resistance is high, the effective thrust is proportionately diminished. One of the drawbacks of the radial engine is its high drag. This can be cut to a minmum by totally enclosing the engine with cowling, but with an increase in weight of structure and an evident sacrifice of visibility (in a single engine tractor installation).

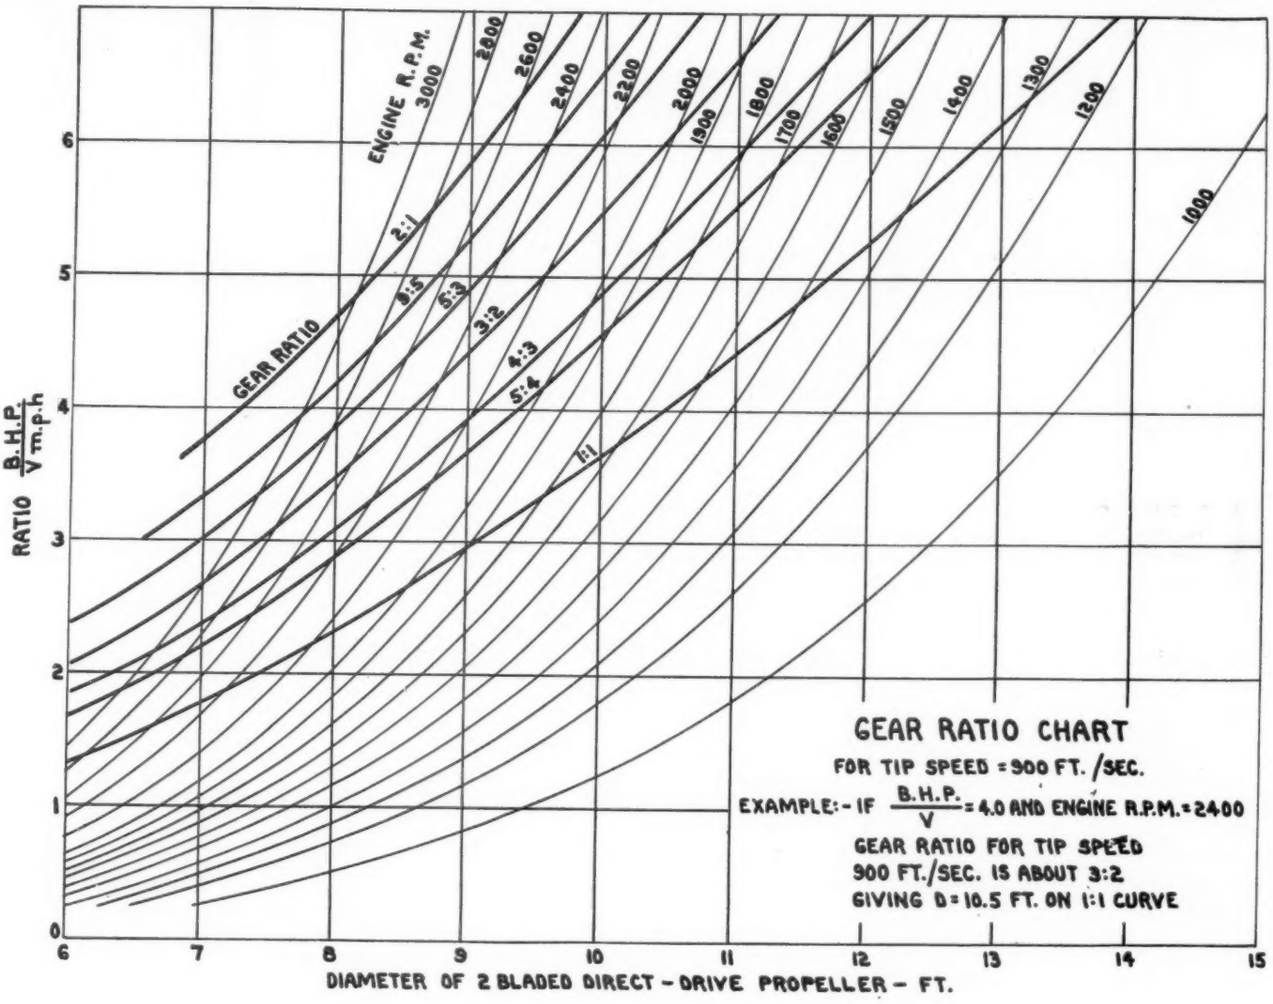

The two factors—direct and indirect—which influence the effective thrust per hp. of an aircraft engine are themselves conflicting. An engine which is designed to develop a certain b.hp. at high r.p.m. will be smaller and lighter than a larger displacement, slower turning engine of the same horsepower, and its air resistance in flight will be less. The high-speed engine will probably require reduction gearing for the purpose of obtaining reasonable propeller characteristics, and this will add to the power plant weight and complication (and, in aircooled engines, will call for additional care to insure proper cylinder and oil cooling).

The chart presented herewith was computed and drawn by Lieutenant Walter S. Diehl of the Bureau of Aeronautics, Navy Department. It can be used both for the determination of the correct gear ratio and the approximate propeller diameter required with such a gear ratio. In using this chart, care must be taken to insure that the b.hp. employed for the computation of

$$\frac{\text{B.HP.}}{\text{V}}$$

is the propeller shaft b.hp. This will be 2 or 3 per cent. lower than the crankshaft b.hp. due to mechanical losses in the reduction gearing. The propeller diameter obtained from this chart will be that of a conventional detachable-blade two-bladed metal propeller. Should this be too great for use, a three-bladed propeller may be employed. This will permit a reduction of propeller diameter to 0.95 that of a two-bladed propeller. The substitution of a three-bladed for a two-bladed propeller will entail a loss in propeller efficiency of about 2 per cent.

Proportioning *the* Plane *for* Lateral Stability

By B. V. KORVIN-KROUKOVSKY

IN our previous paper on Stability on Controllability of Airplanes[1] we gave quite comprehensive discussion on the subject of lateral stability. We explained the meaning of lateral stability, considered in turn all the elements on which it depends, and proceeded to consider the combined effect of these elements on flight of uncontrolled models. We extended the discussion further and analysed the effect of different types of lateral stability or instability on the action and "feel" of controls. Our discussion, however, was purely qualitative. Our aim was to explain the subject in such a way as to enable the test pilot to make correct diagnosis of the airplane he is testing, and to convey his information to the designer in terms, the meaning of which would be clear to both. The explanation of the problem was definite enough to show the designer the way to correct the defects of his machine after receiving the report from test pilot. The lack of quantitative date, however, made it impossible to predict the characteristics of the airplane in regard to aileron and rudder control from the design data. In this paper we will supplement our previous papers, and will give approximate formulæ for preportioning the amount of dihedral and fin area, so as to obtain the desired kind and degree of lateral stability.

We defined the lateral stability as the ability of an airplane to maintain the flight in a straight line with the span of the wings horizontal, and the tendency to return to this attitude after each disturbance. The mathematical theory shows that lateral stability of an airplane in case of straight flight depends on nine different characteristics, and in case of curved flight it is involved in thirty-six different characteristics, making the problem exceedingly complicated. It shows mercy, however, attributing predominant importance to only two of these characteristics, namely to stability in roll and stability in yaw[2]. The stability of an airplane in yaw and in roll is a necessary condition for the lateral stability, but it is not sufficient condition. The relation between the stability in yaw and the stability in roll is even more important than their individual values. The airplane will become laterally unstable if the stability in yaw is excessive, as well as if it is insufficient. The excess of stability in roll, as well as the lack of it, leads to lateral instability. The whole problem of securing lateral stability is essentially that of balancing these two elementary characteristics.

Let us imagine a perfectly normal and well balanced airplane in a straight flight, and let it be suddenly banked by a gust of wind or by pilot's action. The force of gravity remains vertical, but the lift force of the wing remains normal to the span and therefore is inclined by the angle of bank, as this is shown in Fig. 1. These two forces, when added geometrically, leave the unbalanced component directed along the span of the airplane. This competent produces the side slip which brings into play the forces and moments affecting the lateral stability. Fig. 2 shows the airplane banking and sideslipping. The velocity of sideslip v added geometrically to the forward velocity U produces the angle of yaw ψ. As the airplane is sideslipping to the left, the air pressing on the vertical fin and rudder produces the yawing moment Nv. This

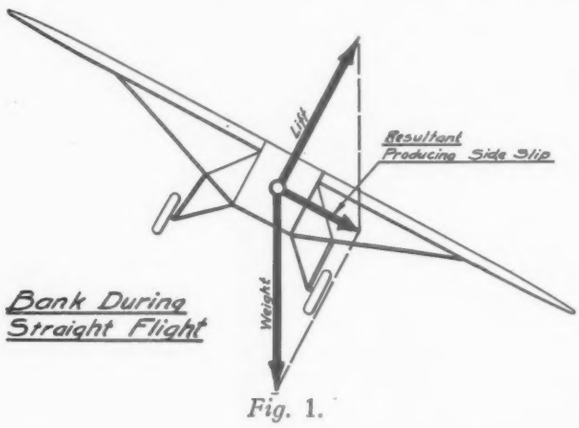

Fig. 1.

moment yaws the airplane to the left, to head it into the relative wind with the angular velocity r. This tendency of the airplane to head into relative wind is known as the *stability in yaw.*

As the airplane yaws to the left under action of the moment N_v, generated by the fin action, its right hand wing moves forward and left hand one moves backward. This motion is combined with forward velocity U and results in right hand wing moving through the air with higher velocity than left hand one. The wing moving faster generates more lift than wing moving slower, and the difference in lift generates the rolling moment L_r, tending to roll the machine in the direction of the original bank. Thus we find that presence of the vertical fin made the machine stable in yaw by generating the moment Nv, but it had secondary effect generating the moment L_r which is dertimental to stability in roll. It tends to roll the machine in wrong direction, and to increase the bank.

The slide slip, however, acts directly on wings, as well as on fin and rudder. If the wings are set at a certain angle of dihedral, they generate the rolling moment Lv which is a stabilizing moment. This moment tends to lift the wing on the side of the side slip, ie. when side slip is to the left it tends to lift the left wing, thus reducing the bank. Here now is the question of lateral stability in a nutshell. If the stabilizing moment Lv due to dihedral is some-

For references see end of article.

MANUFACTURERS' SPECIFICATIONS ON AMERICAN COMMERCIAL AI

THE TABLE BELOW IS BELIEVED TO BE ACCURATE BUT *AVIATION* DOES NO

This table will appear monthly and corrections and sugg

MANUFACTURER	Designation	Price of Plane at Factory	Type	No. of Seats	Make of Engine	Total Rated HP.	Make of Propeller	Span	Wing Area (Sq. Ft.)	Length Overall	Height Overall	Weight Empty (Lb.) With Water If Water Cooled Engine is Used	Pay Load (Lb.)	Disposable Load (Lb.)	Normal Gross Weight Loaded (Lb.)	Performance Level As Supe		
																High Speed in M.P.H.	Cruising Speed in M.P.H.	Landing Speed
Advance Aircraft Co.	Waco 10	$5,535	OBL	3	Sh12	125	H,Hs,SS	30'7"	286	23'9"	9'	1330	370	800	2025	107	93	35
Advance Aircraft Co.	Waco 10	$2,035*	OBL	3	OX5	90	Hs	30'7"	286	23'6"	9'	1225	360	800	2025	96	85	35
Advance Aircraft Co.	Waco 10	$2,585*	OBL	3	E	150	H,Hs,SS	30'7"	286	23'6"	9'3"	1508	600	1092	2600	115	105	40
Advance Aircraft Co.	Waco 10	$7,341	OBL	3	J5	200	H,Hs,SS	30'7	286	22'6"	9'3"	1550	600	1050	2600	135	118	40
Aero-Craft Mfg. Co.	Aero-Coupe	$5,800	SBL	3	W	110	F	32'	250	24'	8"6'	1100	550	1000	2100	110	100	38
Alexander Aircraft Corp.	Eaglerock A-1	.....	OBL	3	J5	200	.....	36'8"	330	24'11"	9'11"	.....	.....	.....	2491	130	..	39
Alexander Aircraft Corp.	Eaglerock A-2	$2,250*	OBL	3	OX5	90	.....	36'8"	330	24'11"	9'11"	.....	.....	.....	2442	100	87	34
Alexander Aircraft Corp.	Eaglerock A-4	.....	OBL	3	E	180	.....	36'8"	330	24'11"	9'11"	.....	.....	.....	2618	121	..	40
American Eagle Aircraft Co.	.....	$2,985	OBL	3	OX5	90	H, Hs	30'	300	24'6"	8'4"	1227	840	830	2057	101	85	30
Fokker Aircraft Corp.	F-7 & C-2	$44,500	CML	10-12	3-J5	600	H	63'3"	630	49'2"	12'9"	5480	2000	3720	9060	122	100	55
Fokker Aircraft Corp.	Universal	$14,200	CML	5-7	J-5	200	H, Hs	47'9"	341	33'	8'9"	2100	1200	1900	4000	118	98	48
Fokker Aircraft Corp.	Super Univ	$19,340	CML	6-8	P Ww	400	SS	50'6"	382	36"	8'11"	2800	1230	2200	5000	140	118	42
Fokker Aircraft Corp	Fokker F-10	$60,000	CML	14	3-PWw	1200	SS	71'2"	728	50'8"	12' 5"	7200	2640	4950	11500	148	125	55
Arrow Aircraft Corp.	Arrow-Sport	$2,257	OBL	2	LB	60	.....	25'6"	178	19'2"	6'11"	524	....	450	974	105	..	36
Bach Aircraft Co.	Air Yacht	$31,800	CML	10-12	2Sh12-pww	650	2 Sty ,SS	52'	412	36.1	9'6"	3300	....	3200	6500	150	110	45
Bellanca Aircraft Corp.	CH	$14,500	CML	6	J5	200	Hz	4'4"	273	24'9	8 6	1850	2229	3284	5134	125	110	46
Berliner Aircraft Co.	CM4	$3,290	OML	3	OX5	90	H,Hs	36	219	25'10"	8	1400	....	900	2300	105	85	41
Berliner Aircraft Co.	CM5	$8,950	OML	3	J5	200	SS	36'	219	25'10"	8'	1675	....	1025	2700	130	110	45
Bird Wing Commr. Airplane Co.	.....	$2,795	OBL	3	OX5	90	Hz	31' 4"	303	23 6"	8' 7	1236	550	1019	2255	90	80	30
Boeing Airplane Co	40-B	$24,500	SBL	3	P Wb	400	H M	44'2"	545	33'4"	11'8"	3543	1428	2536	6079	132	..	57
Boeing Airplane Co.	40-C	$22,500	SBL	5	P Ww	500	H M	44'2"	545	33'4"	11'8"	3522	1445	2553	6075	129	..	57
Boeing Airplane Co.	B-1E	$18,500	CBF	6	P Ww	400	H W	39'8"	545	32'6"	12'	3090	750	1460	4550	115	..	59
Boeing Airplane Co.	B-1D	$15,000	CBF	4	J5	200	.....	39' 8"	466	30'9"	12'	2442	720	1000	3442	95	..	52
Bourdon Aircraft Corp.	Kitty-Hawk	.....	OBL	3	Sh11	96	W	28'	23	21'11"	8'6 ½"	1115	....	....	1883	110	90	40
Breese Aircraft Co.	.....	.....	CML	6	J5	200	SS	41'	260	27	10'6"	155	....	1000	2550	120	115	43
Buhl Aircraft Co	Airsedan-C5A	$13,500	CBL	5	J5	200	SS	42'	334	28	10'	2072	1000	1628	3700	120	95	50
Buhl Aircraft Co.	Airsedan CA-3(	$12,000	CQL	3-4	J5	200	M	36'	240	28'	8'6"	1800	655	1400	3200	139	115	45
Buhl Aircraft Co.	Junior Airsedan	$8,000	CQL	3	W	110	M	36'	240	25'	8'6"	1500	520	1000	2500	110	90	40
Cessna Aircraft Co.	3-120	$5,750	CML	3	A	120	H. Hz	40'6"	2.4	23'8"	7 4	1250	480	750	2000	125	1.0	45-5
Cessna Aircraft Co.	4 125	4.075*	CML	4	Sh12	125	H. Hz	40'6"	224	23' 8	7 4	1260	760	1030	2280	1..	1. 5	45
Cessna Aircraft Co.	4-200	$9,800	CML	4	J5	200	H Hs	40'6"	224	23 8	7 4'	1350	800	1070	2420	120	128	45-5
Command Aire Inc.	Comm'd-Aire	$2,450*	OBL	3	OX5	90	H	31'6"	300	24'6"	8'	1275	375	800	2075	104	85	36
Command Aire Inc.	Heinkel H.D. 40	$25,000	CBL	2	PWw	400	M	57'	250	39'	14'	3100	2500	4400	....	140	.	54
Crawford M. & A. Mfg. Co.	A1	$1,500	OML	2	LR	80	own	30'	150	17' 9"	7'	950	..	450	1400	98	64	47
Crown Motor Carriage Co.	B3	.....	OBL	2-3	K-5	100	S	28' 6"	236	21' 3"	8' 5"	850	330	700	1500	110	90	35
Curtiss-Robertson Airplane Mfg. Co.	Robin	$4,000	CML	3	OX5	90	Hz	41'	245	25'9"	7 10"	1489	328	728	2217	101	85	46
Driggs Aircraft Corp.	Duet II	$1,900	OBL	2	A3	35	Hz	28'	140	19'6"	6'	450	...	370	820	85	75	46
G. Elias & Bro. Inc.	Aircoupe	$3,350	CML	2	A	80	Elias	28' 1½"	192	21'	7'2"	870	518	564	1334	96	80	25
Fairchild Airplane Mfg. Co.	FC-2W2 land	.....	CML	5	P Ww	400	SS	50'	332	32'10"	9'4"	2781	....	2719	5500	140	110	55
Fairchild Airplane Mfg. Co.	FC-2 land	.....	CML	5	J5	200	CR	44'	290	30' 11"	9'	2150	845	1456	3650	122	103	53
Federal Aircraft Corp.	CM-1	$12,500	CM	5	J4B	200	We	37' 6"	262	29' 3"	9'	2080	630	1395	3475	125	105	40
Gates-Day Aircraft Corp.	GD-24	$5,200	OBL	5	E	180	H	45'	350	26'	11'	1700	800	1300	3000	115	95	35
Gulls Aircraft Corp.	Crusader	.....	CBL	4	Sh12	125	Hm	32' 9	245	23'	8'1"	..	...	.	2400	110	90	45
Hamilton Metalplane Co.	H-45	.....	CML	8	PWw	400	H	54' 5"	387	34'8"	9'4"	3300	1153	2408	5750	135	115	50
Hamilton Metalplane Co.	H-47	.....	CML	8	PWh	500	H	54' 5"	387	34 8"	9'4"	3450	1045	2.00	5750	140	120	55
Heath Airplane Co.	Parasol	$695	OML		H	23	own	23'	94	16'9"	5' 11"	290	.	225	515	70	65	32
International Aircraft Corp.	F-17	$2,950	OBL	3	OX5	90	H	35'	325	25	9'6"	7480	320	620	2100	100	87	35
International Aircraft Corp.	F-18	$12,250	CBL	6	J5	200	SS	37'	360	27'6"	10'6"	2200	950	1550	3750	125	110	40
Ireland Aircraft Inc.	Neptune	$14,600	CMA	5	J5	200	CR	40	350	31'6"	11'6"	2250	750	1358	3608	95	85	46
Irwin Aircraft Co.	M-7-2	$1,165	OBL	1	179	25	own	20'	105	13'6"	5'9"	275	100	300	575	90	75	28
Keystone Aircraft Corp.	Pronto	.....	OBL	3	J5	200	.....	39' 11"	365	26'9"	.....	1975	..	1310	3285	112	..	..
Keystone Aircraft Corp.	Pathfinder	.....	CBL	12	3-J5	600	.....	66'6"	1150	46'	.....	6536	1x00	4481	10841	112	..	57
Kinner A. & M. Co.	Courier	.....	OML	2	K-	100	SS	35'	216	23'	7'	915	...	550	1465	120	110	35
Kreider-Reisner Aircraft, Inc.	Challenger	$2,400*	OBL	3	OX5	90	Hs, H	30' 1"	285	23'9"	9'4"	1200	412	811	2000	102	.	39
E. M. Laird Airplane Co.	Commercial	.....	OBL	3	J5	200	SS	34'	300	23'6"	9'3"	1550	800	.	.	130	10	40
Laird Aircraft Corp.	Whippoorwill	.....	CBL	4	J-5	200	.....	36'	351	27	9	1650	...	1000	2650	125	105	40
Lincoln Aircraft Co.	Lincoln-Page	.....	OBL	3	OX5	90	.....	32'	300	.....	.....	1200	450	1000	2200	100	..	35
Lockheed Aircraft Co.	Vega	.....	CML	5-7	J5	200	SS We	41'	275	27'5"	8'6"	1650	1000	1550	3200	135	110	50
Lockheed Aircraft Co.	Air Exp	.....	CML	5-7	P Ww	400	SS	41'	275	27'5"	8'6"	1850	1000	1845	3845	167	135	55
Loening Aeronautical Engr. Corp.	Cabin Amphibian	$26,700	CBA	5-7	PWw	400	SS	45'	504	34'8"	13'2"	3400	1200	2000	5400	120	..	50
Mahoney-Ryan Aircraft Corp.	Ryan B1	$12,200	CML	5	J5	200	H W	42'	290	27'5"	9'10"	1870	800	1430	3300	126	108	49
Metal Aircraft Co.	Flamingo G-1	.....	CML	6-8	PWw	400	SS	48'	354	30'	9'	2800	...	2050	4850	140	120	48
Mono Aircraft Inc.	Monocoupe	$2,675	CML	2	V	55	Hz	30'	158	19'6"	6'3"	700		475	1175	90	75	35
Mohawk Aircraft Corp.	Pinto	$2,775	OML	2	V	55	....	30'6"	124	22'	6'3"	850	200	500	1350	100	85	35
National Airways System, Inc.	Air Kirg	$2,395	OBL	3	OX5	90	Hs	34'1"	310	25'5	9'	1290	...	800	2090	105	85	35
Nilas Aircraft Co	Williams	.....	OML	1	Ss	40	.....	26'	108	18	6'6"	440	...	...	...	85	..	30
Pheasant Aircraft Co., Inc.	B-10	$2,375	OBL	3	OX5	90	Hz	32'6"	283	23'6"	9'	1297	600	785	2082	100	90	35
Pitcairn Aviation Inc.	Mailwing	$10,000	OBL	1-3	J5	200	SS	33'	252	22'10"	8'10"	1612	600	770	2512	136	105	45
Pitcairn Aviation Inc.	Super Mailwing	.....	OBL	1-2	J5	200	.....	33'	262	22'10½"	9'3"	1840	....	1160	3000	128	110	45
Pitcairn Aviation Inc.	PA-4	.....	OBL	3	OX5	90	Hz	30'	226	21'10"	8'7"	1165		785	1950	101	82	45
Prudden Aircraft Corp.	S E-1	$22,500	CML	8	PWw	400	SS	57'	427	38'	9'5"	3000	1290	2065	5065	114	96	59
Richmond Airways, Inc.	Sea Hawk	.....	OMF	5	C6	160	.....	46'	317	28'		1700		1000	2700	95		45
Sikorsky Mfg. Co.	S-37	.....	CBL	18	2P Wh	1000	.....	100'	1049	45'6"	16'3"	8000	4060	7000	15000	122	112	58
Sikorsky Mfg. Co.	S-38 Amphibion	.....	CQA	10	2P Ww	600	SS, H	71'8"	720	40'3"	13'10"	6000	2210	4000	10000	125	110	55
Simplex Aircraft Corp.	Red Arrow	$3,950	CML	2	K5	100	Sty	33'4"	148	20' 3"	6'10"	1000	...	600	1600	125	110	40
Starling Aircraft Co.	.....	.....	OB	3	OX5	90	..	32'	....	23'4"	9	1237		600	1837	104	95	30
Stearman Aircraft Co.	C-2-K	$6,740	OBL	3	Sh12	125	H, Hz	35'-28'	296	24'	9'	1285	350	865	2150	110	90	38
Stearman Aircraft Co.	C-2-B	$8,730	OBL	3	J5	200	H, CR	35'-28'	296	23	9'	1438	400	962	2400	130	110	41
Stinson Aircraft Corp.	SM-1D	$12,500	CML	6	J5	200	H	45' 10"	292	32'	8'6"	2400	1340	2100	4500	125	105	56
Stinson Aircraft Corp.	Junior SM-2	$6,950	CML	4	W	110	Wd	41'6"	236	26'3"	7'9"	1510	593	990	2500	110	94	46
Spartan Aircraft Co.	C-3	$5,250	OBL	3	Wal	135	.....	32'	293	22'11"	8'9"	1300	448	850	2150	115	100	37
Stout Metal Airplane Co.	4 AT	.....	CML	12	3J5	600	SS	74'	785	49' 10"	12'8"	6000	2200	3800	10000	114	100	55
Swallow Airplane Mfg. Co.	Commercial	.....	OBL	3	OX5	90	.....	32'	300	24'	8'6"	1470	360	730	2200	100	.	35
Taylor Bros. Aircraft Co.	Chummy	$3,800	SML	2	K-5	100	.....	34'	175	22'	7'6"	950	160	550	1500	110	100	38
Texas-Aero Corp.	Temple	.....	OML		J5	200	.....	39'4"	225	25'10"	8'3"	....	567		2250			
Thaden Metal Aircraft Co.	T-1	...	CML	7	P Ww	400	.....	53	....	35	11	2900		2200				
Thunderbird Aircraft, Inc.	W-14-O	$2,950*	OBL	3	OX5	90	Sty	31'	278	24'8"	9'7"	1433	340	815	2248	114	95	40
Thunderbird Aircraft, Inc.	W-14-H	...	OBL	3	E	150	Sty	31'	278	24'8	9'7"	1551	5'0	945	2496	135	110	42
Travel Air Mfg. Co.	2000	$2,950	OBL	3	OX5	90	H, Hs	34'8"	296	24'2"	8'9"	1350	350	750	2100	100	..	42
Travel Air Mfg. Co.	4000	$9,100	OBL	3	J5	200	H	34'8"	296	23'6"	9'9"	1600	600	1000	2600	130	..	45
Travel Air Mfg. Co.	5000	$13,000	CML	5	J5	200	SS, H	48'7"	282	30' 10½"	18'8½"	2175	944	1625	4100	128	107	50
Travel Air Mfg. Co.	9000	.....	OBL	3	Sh12	125	W	34'8"	296	24'2"	8'9"	1250	360	960	2210	105	..	42
Wallace Aircraft Co.	Touroplane	$2,500*	CML	3	A	80	Hz	37'	205	23'6"	7'6"	850	320	650	1500	95	82	40
Whitco Aircraft	Hum Bird	$2,150	OBL	3	OX5	90	Hz	33'1"	318	23'6"	8'3"	1050	450	850	1900	97	90	35
Western Airplane Corp.	King Bird	$2,500	OBL	3	OX5	90	Hz	35'	320	25'4"	9'	1200	600	800	2000	95	85	30
Zenith Aircraft Corp.	Albatross	$35,000	CML	14	3-Sh12	375	Sty.	90'	1032	50'	12'6"	1000	5000	7000	2.000	100	95	35

TYPE
A—Amphibian
B—Biplane
C—Closed
F—Flying boat
L—Landplane
M—Monoplane
O—Open
Q—Sesquiplane
S—Semi-closed
W—Seaplane

ENGINE: One engine unless stated in italics.
A—Ansani
C6—Curtiss
E-Wright Hispano-E
FC—Fairchild Caminez
H—Henderson
179—Irwin
J5—Wright Whirlwind
K—Kinner
L—Liberty
LB—Le Blond
LR—LeRhone
OX5—Curtiss
P Wb—Pratt & Whitney Hornet
P Ww—Pratt & Whitney Wasp
SR—Super Rhone
SH—Siemens Halske
Sz—Szekely
V—Velie
Wal—Walter
W—Warner
*—Price without engine

PROPELLER:
CR—Curtiss Reed
H—Hamilton
Hs—Hartsell
M—Metal
Sty—Story
SS—Standard Steel
W—Wood
We—Westinghouse

FUSELAGE AND WING
B—Bolted
Cor.—Corrugated
D—Duralumin
F—Fabric cover
Mon—Monocoque
O—Open section
BRAKES:
B—Bendix
Ex—Extra
H—Hydraulic

CIAL AIRPLANES AND SEAPLANES AS COMPILED BY *AVIATION*

N DOES NOT ASSUME RESPONSIBILITY FOR THE FIGURES GIVEN

orrections and suggestions are invited

Performance With Full Load at Sea Level As Supplied by Manufacturers.

High Speed in M.P.H.	Cruising Speed in M.P.H.	Landing Speed in M. P. H.	Climb at Sea Level in F. P.M	Climb to 10'000 in Minutes	Service Ceiling in Feet	Fuel Capacity in Gallons	Normal Range in Miles	Normal Fuel Consumption at Cruising Speed Gal. Per Hr.	Fuselage Construction	Wing Construction	Are Wings Wired for Lighting?	Type of Control	Brakes	Type of Shock Absorber	Type of Pontoon Provided on	Additional Cost a Seaplane	Dept. of Commerce Type Certificate Number	Performance Figure Guaranteed?	
107	93	35	..	..	....	37	....	....	Wl-ST	Wd-F	Yes	SPD	Ex.	O-S	EFH	$1,100	26	....	Advance—Waco Siemens
96	85	35	..	..	13,000	48	450	8	Wl-ST	Wd-F	Yes	SPD	Ex	O-S	EFH	....	13	....	Advance—Waco OX—5
115	105	40	..	..	15,000	76	..	....	Wl-ST	Wd-F	Yes	SPD	Ex.	O-S	EFH	$1,100	42	....	Advance—Waco Hisso
135	118	40	1200	..	18,000	65	..	12	Wl-ST	Wd-F	Yes	SPD	Ex.	O-S	EFH	$1,100	41	....	Advance—Waco W—J—5
110	100	38	900	..	12,000	44	400	6.6	Wl-ST	Wd-F	Yes	SD	B	Arl	....	$1,000	Apl.	Yes	Aero-Craft—Coupe
130	..	39	1080	..	17 900	..	..	....	Wl-ST	Wd-F	....	SCD	....	RC	E	....	56	....	Alexander—Eaglerock A-1
100	87	34	514	..	11,500	46	435	10.3	Wl-ST	Wd-F	....	SCD	....	RC	E	....	7	Yes	Alexander—Eaglerock A-2
121	..	40	840	..	14,700	..	..	....	Wl-ST	Wd-F	....	SCD	....	RC	E	....	58	....	Alexander—Eaglerock A-3
101	85	30	575	45	12,000	42	425	7.5	Wl-ST	Wd-F	Yes	SPD	Ex.	RAR	E	$990	17	Yes	American Eagle
122	100	55	720	24	12,500	185	580	32	Wl-ST	Wd-P	Yes	DeCD	Yes	RAR	....	....	Apl	....	Atlantic—Fokker F7 & C-2
118	98	48	500	40	11,500	78	600	12	Wl-ST	Wd-P	Yes	SCD	Yes	RC	M	$2450	9	....	Atlantic—Fokker Univ.
140	118	42	1000	.5	18,000	120	700	20	Wl-ST	Wd-P	Yes	SCD	Yes	RAR	M	$3110	Apl	5%	Atlantic—Super Univ.
148	125	55	1400	10	18,000	286	580	60	Wl-ST	Wd-P	Yes	DeCD	Yes	RAR	....	....	..	....	Atlantic—Fokker F-10
105	..	38	680	..	15,200	..	..	..	Wl-ST	Wd-F	....	S	....	RC	....	....	..	....	Arrow—Sport
150	110	45	1100	12	18,000	170	500	32	Wd-P	Wd-F	Yes	DeCD	S-B	Hy-C	..	....	..	Yes	Bach—Air Yacht
120	110	46	850	..	13 000	92	800	10	Wl-ST	Wd-F	Yes	St D	Yes	RC	D	....	47	....	Bellanca—CH
105	85	41	450	40	13,000	37	400	8	WEST	Wd-F	Ex.	SPD	Ex.	O-S	None	....	39	5%	Berliner—CM-4
138	110	45	..	..	..	60	550	12	Wl-ST	Wd-F	Ex.	SPD	B	O-S	None	....	Apl	5%	Berliner—CM-5
90	80	30	460	80	10.000	35	325	9	Wl-ST	Wd-F	Yes	SCPD	Ex.	RC	E	$490	Apl	Yes	Bird Wing—No. 6
132	..	57	800	16.5	15,100	140	..	25	Wl-ST	Wd-F	Yes	S	S	O	....	....	27	....	Boeing—40-B
129	..	57	600	25.3	12,000	140	..	20	Wl-ST	Wd-F	Yes	S	S	O	....	....	54	....	Boeing—4C-C
115	..	59	1000	18.5	12,000	80	..	20	Wd	Wd-F	Yes	De	....	....	....	....	..	....	Boeing—B-1E
95	..	52	..	..	12,000	40	..	..	Wd	Wd-F	Yes	DeD	....	..	....	....	23	....	Boeing—B-1D
110	90	40	..	..	12,000	37.5	..	6.5	Wl-ST	Wd-F	...	SPD	....	RD	....	....	Apl	....	Bourdon Kitty Hawk
121	115	43	900	..	15.500	80	550	9.5	Wl-ST	Wd-F	....	....	....	RC	....	....	..	....	Breese
120	95	50	700	45	13,500	70	..	15	Wl-ST	Wd-F	Yes	SC	Yes	OS	Met	•2,500	33	....	Buhl Airsedan
139	115	45	900	15	14,000	90	700	14	Wl-ST	Wd-F	Yes	SP	Yes	OS	Met	$3,000	46	5%	Buhl Special Airsedan
110	90	40	600	25	11,000	..	600	7	Wl-ST	Wd-F	Yes	SP	Yes	OS	Met	$2,000	Apl	5%	Buhl Junior Airsedan
125	110	45-50	1000	..	....	42	400	10	Wl-ST	Wd-F	Yes	SPD	Ex.	RAR	....	....	Apl	5%	Cessna Aircraft Co.
1..	1.5	45	1000	..	....	4..	400	10	Wl-ST	Wd-F	Yes	SPD	Ex.	RAR	....	....	Apl	5%	Cessna Aircraft Co.
170	125	45-50	1400	..	..	42	400	12	Wl-ST	Wd-PF	Yes	PD	Ex	RAR	....	....	Apl	5%	Cessna Aircraft Co.
104	85	36	550	..	10,000	..	400	....	Wl-ST	Wd-PF	Yes	S	No	RC	E	$1,100	53	....	Command-Aire
140	..	54	..	..	18,000	..	600	....	Wl-ST	Wd PF	Yes	DeD	Yes	Arl	M	$2,000	..	5% N	Heinkel H.D. 40
98	64	47	..	..	15,0..	40	5..	6	ST-Wd	Wd-F	No	D	....	RC	....	....	No	5%	Crawford A/
110	90	35	750	45	14,000	27	400	6	Wd	Wd-F	No	SD	No	Gra	....	....	Apl	Yes	Crown—B3
101	85	46	400	..	11,500	51	607	7	Wl-ST	Wd-FD	Yes	S-PC	No	RAR	....	....	40	5%	Curtiss—Robin
85	75	46	560	..	15.000	15	375	3	Wl-ST	Wd-FD	Yes	SC	No	RAR	None	....	15	5%	Driggs—Dart II
96	80	25	590	..	10,000	20	400	4	Wl-ST	Wd-F	Yes	SC	No	Elias	None	....	..	....	Elias—Aircraft
140	110	55	1050	13	17,500	160	900	20	Wl-ST	Wd-F	Yes	S-CP	Yes	Hy	F	....	61	....	Fairchild—FC-2W 2 land
122	105	53	580	27	13,100	110	710	15.5	Wl-ST	Wd-F	Yes	S-CP	Yes	Hy	F	....	10	....	Fairchild—FC-2 land
126	105	40	..	..	..	84	750	10	Wl-ST	Wd	Yes	SC	Yes	Arl	....	....	..	....	Federal Aircraft—(M-1
115	95	35	800	14	16,000	56	600	....	DR-F	Wd-F	Yes	SCP	Ex.	O-S	E	$2500	Apl	5%	Gates—Day—New Standard
110	90	45	600	..	11,500	45	420	....	Wl-ST	Wd-F	Yes	DeD	B	O	....	....	..	....	Gillis—Crusader
135	115	50	950	20	16.000	140	600	21	D-eor.	D-eor.	Yes	De	Yes	Arl	H	$2500	..	5%	Hamilton—H-45
140	120	55	1000	16	18,000	140	600	23	D-eor	D-eor	Yes	De	Yes	Arl	H	$2500	..	5%	Hamilton—H-47
70	65	32	200	..	..	3.3	120	....	R-ST	Wd-F	No	SC	No	RC	....	....	..	....	Heath—Parasol
100	87	35	600	..	10.500	40	450	....	Wd	Wd-F	Yes	S	Ex	O	....	....	35	....	International—F-17
125	110	40	850	..	14,000	67	500	....	Wd	Wd-F	....	S	Std.	O	....	....	Apl	....	International—F-18
96	85	46	650	35	11,000	65	500	12	ST-D	Wd-F	Yes	DeD	No	OC	....	....	Apl	5%	Ireland—Neptune
90	75	28	400	65	12,000	8	300	1.7	Wd	Wd-F	Yes	SC	....	RC	W	$175	..	6%	Irwin—M-T-2
112	..	..	800	..	14,000	60	..	....	Wl-ST	Wd-F	....	....	....	....	....	....	..	....	Keystone—Pronto
112	..	57	570	..	..	..	500	....	Wl-ST	Wd-F	....	....	....	....	....	....	..	....	Keystone—Pathfinder
120	110	35	900	..	20,000	..	800	7	Wl-ST	Wd-F	....	....	S	Gr	....	....	..	....	Kinner—Courier
102	..	39	548	..	12,000	..	400	....	Wl-ST	Wd-F	Ex	SD	No	RC	EH	$1,100	19	5% N	Kreider-Reisner—Challenger
130	10	40	1350	10	....	80	600	....	DT, S	Wd-F	..	SPA	....	....	....	....	..	....	E. M. Laird—Commercial
125	105	40	..	15	....	..	..	....	Wl-ST	Wd-F	Yes	DeD.	Std	RC	....	....	..	....	Laird—Whippoorwill
100	..	35	600	..	....	42	500	....	Wl-ST	Wd-F	....	....	....	....	....	....	28	....	Lincoln—Page
135	110	50	1000	16	15,900	100	700	10	Wmon.	Wd-P	Yes	SC	H	RC	E	....	Apl	5%	Lockheed—Vega
167	135	55	1460	10	17.250	100	1000	18	Wmon.	Wd-P	Yes	SC	H	RC	....	....	Apl	5%	Lockheed—Air Express
120	..	50	..	..	14.000	140	650	....	Wd-D	Wd-F	Yes	DeC	Ex.	RC	....	....	34	....	Loening—Amphibian
126	108	49	1000	..	16,000	83	700	10-11	Wl-ST	Wd-F	..	SC	B	Gra	E	$1,800	25	Yes	B. F. Mahoney—Ryan B/
140	120	48	1250	..	..	150	1000	18	Wl-ST	D	Yes	DeDC	S	Arl	..	....	..	....	Metal—Flamingo
90	75	35	700	..	....	..	..	..	Wl-ST	Wd-F	Yes	S Pl	..	RAR	E	....	..	....	Mono Aircraft—Monocoupe
100	85	35	650	..	10,000	22	350	4.6	Wl-ST	Wd-F	No	S Pl	No	Gra	....	....	95	Yes	Mohawk—Pinto
105	85	35	600	..	15,000	35	396	8	Wl-ST	Wd-F	No	S	No	RC	....	....	29	....	National Airways—Air King
85	..	30	925	..	..	..	360	....	Wl-ST	Wd-F	..	SC	Std	RAR	....	....	Apl	....	Nilac—William
100	90	35	500	25	12,500	38	400	9	Wl-ST	Wd-F	Ex.	SPD	Ex.	RC	EH	$1,000	36	....	Pheasant—Hi/o
136	105	45	1600	..	11,000	60	600	....	Wl-ST	Wd-F	Yes	S	Yes	Arl	....	$900	18	5%	Pitcairn—PA-5
128	110	45	..	..	....	76	..	....	Wl-ST	Wd-F	Yes	S	....	Arl	....	....	..	....	Pitcairn—PA-6
101	82	45	..	..	..	35	400	....	Wl-ST	Wd-F	..	S	....	Gra	....	....	..	....	Pitcairn—PA-4
114	96	59	750	..	12,000	110	540	17	D-eor.	D-eor.	Yes	DeDC	Yes	P	....	....	..	....	Prudden—S-E-1
95	..	45	..	..	..	42	..	..	Wd-D	Wd-F	....	DeCP	....	....	....	....	..	....	Richmond Airways—Sea Hawk
122	112	58	650	..	15.000	370	790	50	DOR, B	DOR, B	....	De D	Hy	RDO	....	....	Apl	5%	Sikorsky—S37
125	110	55	880	15	19,400	200	500	36	Wd-D	DOR, B	Yes	DeD	....	DOS	WD	....	60	5%	Sikorsky—S38 Amphibion
125	110	40	1000	17	16.000	..	1250	5.5	Wl-ST	Wd-F	Yes	S	....	....	....	....	..	5%	Simplex—Red Arrow
104	95	30	..	15.000	..	40	400	..	Wl-ST	Wd-F	....	SD	....	HyC	....	....	..	....	Starling
110	90	38	625	..	12,000	50	500	7	Wl-ST	Wd-F	Yes	PC	St.	RHy	D	....	Apl	5%	Stearman—C-2-K
130	110	41	1000	..	18,000	65	620	11.5	Wl-ST	Wd-F	Yes	PC	St	RHy	D	$1,200	Apl	5%	Stearman—C-2-B
125	105	55	900	..	14.000	90	750	11	Wl-ST	Wd-F	Yes	DeD	Std.	Hy	M	$2,500	74	....	Stinson—SM-1-D
110	90	46	500	..	13,500	42	500	7	Wl-ST	Wd-F	Yes	DS	Std.	Hy	....	....	48	5%	Stinson—Junior
115	100	37	800	12.5	18,000	50	600	8	Wl-ST	Wd-F	Yes	DS	No	RC	....	....	73	Yes	Spartan—C-3
114	100	55	..	..	14,000	235	840	30	D-eor.	D-eor.	Yes	DeD	St	O	....	....	..	....	Stout—Ford—4AT
100	..	35	600	..	..	36	500	..	Wl-ST	Wd-F	..	..	....	RC	....	....	21	....	Swallow—Commercial
110	100	38	850	..	....	30	500	6	Wl-ST	Wd-F	Yes	SP	....	RAR	....	....	..	Yes	Taylor Bros.—Chummy
..	..	..	..	..	..	50	..	....	Wl-ST	Wd-F	....	S	....	....	....	....	..	....	Texas—Temple
..	..	..	..	..	..	120	..	..	D-eor.	D-eor	..	De	....	Gra.	....	....	..	....	Thaden Metal—T-1
114	95	40	800	20	15,000	43	440	10	Wl-ST	Wd-F	Yes	SpeD	Ex	R	EH Ex	$1,100	Apl	5%	Thunderbird W14-O
135	110	42	1000	16	16.000	60	440	15	Wl-ST	Wd-F	Yes	SpeD	Ex	R	EH Ex	$2,950	Apl	5%	Thunderbird W-14-H
100	..	42	..	..	12,000	42	410	8	Wl-ST	Wd-F	Yes	SPC	No	RC	....	....	30	....	Travel Air—2000
130	..	45	..	..	20,000	60	..	12	Wl-ST	Wd-F	Yes	SPC	No	RC	....	....	32	....	Travel—4000
128	107	50	700	..	13,500	78	650	12	Wl-ST	Wd-F	Yes	DeD	Yes	O	....	....	Apl	....	Travel Air—6000
105	..	42	..	..	..	68	650	..	Wl-ST	Wd-F	Yes	SPC	....	RC	....	....	38	....	Travel Air—Siemens
95	82	40	670	37	11,000	28	500	5.25	Wl-ST	Wd-F	Yes	SPD	....	Hy	....	....	..	....	Wallace—Touroplane
97	90	35	600	..	14,000	40	350	8	Wd Wl8	Wd-F	No	S	....	C	E	....	Apl	5%	Whites—Humming Bird
95	85	30	600	20	12,000	..	500	8	Wl-ST	Wd-F	No	SC D	No	RC	Own	$1,000	No	5%	Western—King Bird
100	85	35	600	..	20,000	300	1000	20	Wl-ST	Wd-F	Yes	C	Yes	Arl	No	....	..	Yes	Zenith—Albatross

FUSELAGE AND WING CONSTRUCTION

olted
-Corrugated
Duralumin
abric cover
-Monocoque
pen section

LAKES:

endix
Extra
Hydraulic

P—Plywood cover
R—Riveted
S—Steel
T—Tubing
Wd—Wood
Wl—Welded

L—Lockheed
S—Saussedde
Std—Standard

LIGHTS:

N—Navigation lights

CONTROL:

A—Arens
C—Cables
D—Dual
De—Wheel
P—Push rods
S—Stick
Pl—Pedal

SHOCK ABSORBER

Arl—Aerol
C—Cord
D—Compression
Gra—Grass
Hy—Hydraulic
O—Oleo
P—Pneumatic
R—Rubber
RAR—Russo Aero Rings
S—Coil Spring
T—Trombone

PONTOONS:

D—Duralumin
E—Edo
F—Fairchild
H—Hamilton
M—All metal
W—Wood

TYPE CERTIFICATE:

Apl—Applied for and is pending

GUARANTEE:

N—New

what larger than destabiliging moment L_r due to yaw, the machine will gradually roll to the right and after one or two slight oscillations will resume the original attitude. This is the case of normal stability. If on the other hand, the Lv is smaller than moment L_r due to yaw, the latter will roll the machine to the left thus increasing the bank. Increased bank will cause increase of the side slip, which

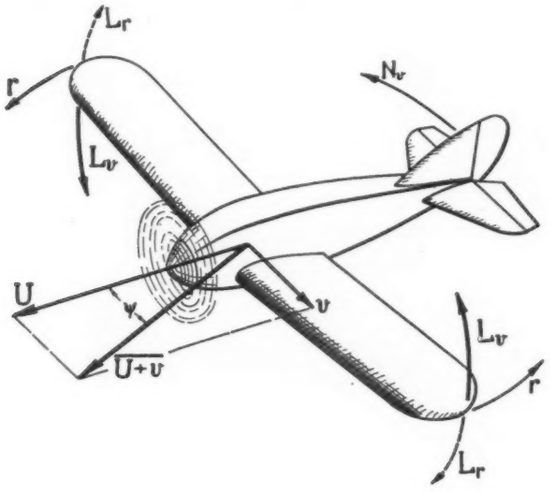

Fig. 2.

will in turn increase the rate of yaw and the destabilizing moment L_r. Here we have the case of small initial side slip generating yaw, and yaw aggravating the side slip. The machine deviates from the straight flight and travels along the spiral path, gradually tightening the turns. This is the case of *spiral instability,* which is characterized in actual airplanes by tendency to overbank on the turns, and in ability to make perfect turns by using ailerons alone, while holding the rudder practically neutral.

Were the moment Lv due to dihedral very large, and the moment L_r due to yaw very small, the machine side-slipping to the left would level out too quickly. The forces due to angular as well as translational velocity of roll and of side slip would carry the machine past the normal attitude, and would make it bank to the right. The bank to the right would cause the side slip to the right, and the cycle would be repeated on right hand side. Instead of the straight flight we have here the series of large oscillations alternating from one side to another. This case is known under the name of *unstable oscillations.* Actually the nature of flight varies from gentle persistant roll all the way up to severe oscillations increasing with each beat, depending on just how large is the dihedral and how small is the fin area. Slight further decrease of fin area or increase of the dihedral would lead to *spin instability,* when the machine unstable in yaw tends to turn around and to fly tail first. Thus we see that while the moment L_r—rolling moment due to yaw—is destabilizing, and the excess of it leads to spiral instability, a certain amount of it is quite necessary. It tempers the moment Lv—rolling moment due to side slip, the violence of which leads to unstable oscillations if not properly tempered. As the strength of the moment L_r for any given airplane depends on the strength of yawing moment Nv, we come to conclusion that there must be certain optimum value of the ratio of Nv to Lv at which the stability can be obtained.

The rolling moment due to side slip which we designate by Lv depends on the amount of the fin area above the center of gravity, on sweepback of the wings and on the dihedral. The dihedral, however, has so much more effect on the moment Lv than all the other factors combined that we can concentrate on it all our attention and disregard the rest. Theoretical considerations[3] show that magnitude of the moment L_v can be determined by the formula.

[1] $$Lv = K\,b\,\beta\,S\,n\,U$$

where:

b—is half span of the wing in ft.

β— the angle of dihedral, which we will measure in degrees.

U— the speed of flight.

S— wing area in sq. ft.

n— slope of the lift coefficient curve which depends on the aspect ratio and can be determined with sufficient accuracy by the empirical formula.

$$n = \frac{0.1\ R}{R+2}$$

where R—aspect ratio determined as

$$R = (2b)^2/S$$

K— numerical constant the value of which is of no interest to us now.

The experiments confirm the formula [1] for the angles of attack within the flying range, but show that even straight wing has certain degree of stability in roll. In order to account for this in the following work we will add ½ deg. to the actual dihedral, using $\beta + 0.5$ instead of β in formula [1].

The yawing moment due to side slip, which is designated by Nv, depends mostly on the side area and shape of the fuselage and on the combined area of the vertical fin and rudder. The yawing moment due to fin and rudder can be determined by the formula:

[2] $$Nv = K\,s_t\,l\,n_1\,U$$

where s_t—is combined area of the fin and rudder.

l — distance from the center of gravity of the airplane to center of pressure on the vertical tail surface, which is located at 25 per cent. of its mean chord. Actually we will measure the distance l from the center of gravity to the rudder hinge. The error thus introduced is very small, and the work of measuring and computing the data is made considerably easier.

n_1—slope of the lift coefficient curve for the vertical tail surface. In view of a very small aspect ratio of vertical tail surfaces ordinarily used, the n_1 varies but little, and we can assume for it the average value of 0.030.

U—speed of the flight.

The yawing moment due to fuselage can be determined in a similar way by the formula

[3] $$Nv = 0.015\,K\,s_f\,X\,U$$

where

s_f—side area of the fuselage in sq. ft.

X—distance of center of pressure on the fuselage from the center of gravity. X is positive if the center of pressure is behind the center of gravity, and negative if it is ahead of it. The center of pressure is assumed to be at 25 per cent of the fuselage length.

0.015—a constant taking place of n_1 used for the fin.

Now we can combine the formulæ 1, 2 and 3 and write the expression for the ratio of Nv and Lv as

[4] $$K = \frac{N_v}{L_v} = \frac{0.030\ s_t\ 1 + 0.015\ s_f\ X}{b\,S\,n\,(\beta + 0.5)}$$

The coefficient K we will call hereafter the *coefficient or lateral stability.* The discussion given above makes us expect that certain values of this coefficient will correspond to stability, while certain higher values will correspond to spiral instability, and certain lower values will correspond to unstable oscillations. In order to find out just what these values are, we will turn now to con-

sideration of the few actual cases characteristic for diffent kinds of stability and instability.

As the first example we will consider Aeromarine Mailplane AM-1 the photograph of which is shown on Fig. 4. This machine was built in 1923 for replacement of DH-4 airplanes used at that time by the Air Mail. The choice of it as an example for this article is justified by the fact that writer was placed in charge of its design, and is therefore thoroughly familiar with all its details, as well as with subsequent troubles. It was realized that Air Mail pilots were accustomed to DH-4's, and the attempt was made to have the characteristics of the new machine somewhat similar to DH-4. Yet it was desired to improve the "directional stability," as the feature most important for the cross country flying. To achieve this end the fuselage was made about three feet longer and the vertical tail surfaces were somewhat increased in size. At the same time the upper wing containing almost 2/3 of the wing area was made straight, and only lower wing had the dihedral of 3°, so that mean dihedral was only 1.15° instead of 3° for DH-4. The resulting difference between these two machines can be seen in Fig. 3. Turning to the notation used in this paper we can say that moment Nv was increased while the moment Lv was decreased.

The flight tests were disappointing. The machine did not become "directionably stable," but on the contrary had to be kept on its path by the pilot. Either one or another wing would become heavy. After the spiral glide through the opening in the clouds the pilot found it difficult to level it. The ailerons were heavy and ineffective, despite being balanced. The rudder would swing the machine around, but there its effect ended, the machine did not tend to bank in response to it. To make a long story short, the machine displayed what we know now to be spiral instability. Check of the lateral stability coefficients now, five years after it was built, shows the coefficient of 93 for this machine, as against 51 for DH-4 which had satisfactory stability characteristics.

This example was related here in such detail as it is a very typical case of encountering the spiral instability because of a common misconception of the term "directional stability." The directional stability depends on the ratio of stability in yaw to stability in roll, and not on stability in yaw alone. Were the present day knowledge available in 1923, the plane described above could have been very easily corrected by adding but 1 deg. of dihedral, which would reduce the stability coefficient to 56.

As the second example we will consider the flying boat "Malolo" designed by the writer and built by Edo Aircraft Corp. in 1927. The boat was designed for the specific purpose of experimenting with lateral controls, the object being to develop the machine which amateur pilots of little experience could use safely. It was realized by that time that lateral stability depends on the coordination of the stability in roll and the stability in yaw, but the quantitative knowledge of their relation was lacking. The machine was designed therefore as a braced monoplane, so that dihedral could be easily changed by using the bracing struts of different lengths. The stability in yaw could be easily changed by changing the size of the fin and rudder.

For the first flights it was rigged with a dihedral of 6 deg. and with the vertical tail surface of 19.6 sq. ft.

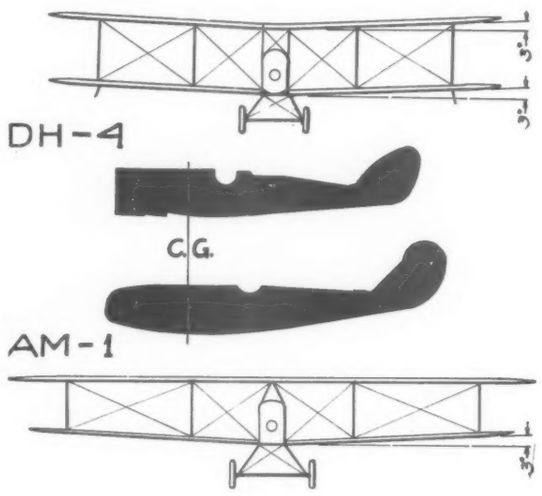

Fig. 3

It became immediately apparent, however, that such a rigging produced the instability classified as "unstable oscillations." It was necessary to control the boat all the time in order to fly on a straight line, and the controlling had to be done by the rudder. The use of ailerons did not help to keep it on a straight course, and the less they were used the better it was. When all the controls were held in a neutral position at about cruising speed, the generation and mechanics of the oscillations became quite evident. The boat was observed to deviate from the straight course, banking more rapidly than turning, until it overbanked and sideslipped. Then it leveled out rather briskly and banked to another side repeating the cycle. The flight consisted of a series of turns alternatively to the right and to the left apparently quite steady and persistent, without any tendency either to increase or die out. The banks reached about 30 deg. Average direction of the flight was maintained quite well, and while making these turns the machine felt steadier and more secure than in normal flight with its odd tendency to hunting.

Fig. 4. Front view of the Aeromarine mail plane AM-1

For the next experiment the dihedral was reduced to 3 deg., the boat not being changed in any other way. It was found that it behaved much better, but not quite well yet. It is probable that were it tested first in this condition, its handling would be classified as "peculiar," "so-so" or some similar vague expression. The test pilot, however, being familiar with all the symptoms from the first tests, detected them easily in this case, and was able to reproduce the oscillations. These, however, were much more gentle, the bank on each turn not increasing beyond 20 deg. It was evident that instability was much less pronounced, but still remained of the same type—"unstable oscillations."

For a third experiment the vertical fin and rudder were changed, increasing the vertical tail area from 19.6 to 27.8 sq. ft. Dihedral remained the same and the boat was not changed in any other way. The boat was found to be very good on lateral controls and was flown for several hours in this condition. During one of these flights with rather heavy load the boat was accidentally stalled during the climb and began to settle or sink. Quite rapidly it sank through some 150 ft. of altitude, hit the water on almost even keel and rebounded, all this without the least tendency to swerve or fall on the wing. It is really the lack of these familiar signs that allowed an experienced pilot to stall the machine. The use of ailerons and of the ruder was tried on very flat glides and they were found to be quite effective at low speed. This is particularly interesting, because while the boat had "unstable" rigging, several pilots complained of very weak controls. It proves that it is unadvisable to pass judgment on controls, until the lateral stability is properly adjusted.

Returning to the "coefficient of lateral stability," we find that in its best, most stable condition, the boat had a coefficient of 44; in the second experiment, displaying moderate instability, the coefficient was 26, and in the most unstable condition it was 15. Thus we see that a low value of the coefficient indicates the presence of the type of instability known as unstable oscillations, and the high value—found in Mailplane AM-1—indicates the spiral instability. In Table I we collected the data on a number of airplanes for which we computed the coefficient of lateral stability. The airplanes are divided in three groups—first one containing the machines definitely known to display spiral instability, the second one containing two cases of "Malolo" displaying unstable oscillations and third is the largest group of 38 airplanes which are supposed to be satisfactory. Some machines in this group, such as Aeromarine E0 and De Haviland 4 are definitely known to the writer to be satisfactory, others are assumed to be satisfactory in absence of information to the contrary. As these machines were chosen at random from the airplanes in use, one can expect the average value of the coefficient to be fair approximation to the best value. The choice of the airplanes listed in the Table I was limited to airplanes of American or English manufacture, as the conception of the stability and the tendency of designers in these two countries are very similar. The French airplanes as a rule have very little dihedral, and we are inclined to consider many of them as spirally unstable. German designs show no definite tendency and their airplanes vary from complete lack of dihedral to very large dihedral. It is useless to consider the problem of airplane stability as something abstract. The opinions of the pilots on what is required in the way of stability depend on their training and their past experience. We are concerned in this article with the definite problem of giving the rule for proportioning of the airplanes to satisfy the tastes of American and English pilots. In our study therefore we use the statistics of the American and British airplanes.

TABLE I.

Coefficient of lateral stability for several airplanes.

Make and Model of Airplane	*Coefficient*
Spiral Unstability:	
(a) Aeromarine E0—Exper. Large Fin	109
(a) Aeromarine Mail Plane AM-1	93
Curtiss JN-4	108
Unstable Oscillations:	
(e) (c) (a) Edo Malolo—Experimental 1	15
(e) (c) (a) Edo Malolo—Experimental 2	26
Supposedly Normal:	
(a) Aeromarine E0—as built	72
(a) Aeromarine E0—Exper. large fin and dihedral	25
(a) Aeromarine AMC	85
(a) Aeromarine—40	36
Avro 504	52
Blackburn—"Sprat"	27
Boeing—Mail Plane	93
Bristol—"Badmington"	88
Bristol—Fighter	43
Boulton & Paul "Bugle"	43
Consolidated PT-1	89
Curtiss "Fledgeling"	87
(a) Curtiss NC-1	95
(a) Curtiss HS-2L	37
De Haviland 4	51
De Haviland "Moth"	63
De Haviland "Conberra" 61	32
De Haviland 66	76
(a) (c) (e) Edo Malolo—Experimental 3	44
(b) Fairey III	87
Gloster "Grouse II"	38
Gloster "Grebe II"	53
International F-17	57
(c) Lockhead "Vega"	91
(c) Lone Eagle	38
Marine Bomber NBS-1	79
(d) Mercury 6W-3	91
Pitcairn "Fleetwing"	78
Pitcairn "Mailwing" PA-5	53
Pitcairn "Orowing"	70
(e) Ryan "Brougham"	67
SE-5a	44
(a) Short "Calcutta"	41
Sopwith "Camel"	56
(e) Stinson—SM-1	86
(a) Supermarine "Southhampton"	80
Swallow 1927	89
(e) Travel Air—5000	28
Average for supposedly normal airplane	62

Remarks:

(a) Flying Boat.
(b) Float seaplane.
(c) Cantilever Monoplane—½ deg. added to designed dihedral to allow for deflection of wings.
(d) One degree of dihedral is allowed for every 6 deg. of sweepback.
(e) Wing bracing struts are considered as lower wings at large dihedral. Only ½ of the area of struts is taken into account.

We find that average value of the coefficient of lateral stability for the machines in use in this country or in England is 62. If we adjust the dihedral and vertical fin area in design of a new airplane to give the coefficient of 62 we can be reasonably certain that it will have the normal characteristics in respect to aileron and rudder controls. Certain amount of deviation is permissible, of course, and probably the range from 40 to 80 is perfectly

safe. It is the writer's belief, that it is not safe, however, to go to the limit of variation shown by the airplanes listed in the table as supposedly normal. To start with, it is only recently that we began to understand correctly the meaning of lateral stability. The lack of definite standard of comparison and the dependence on personal opinion of different pilots is responsible for wider variation of characteristics of different airplanes than it is necessary.

On the other hand we should not forget that in this method we took into account only two most important characteristics, and neglected seven less important ones. The variation in these neglected characteristics may widen or narrow down the range of permissible values in the coefficient of lateral stability. Thus Aeromarine AMC was satisfactory with coefficient as high as 85, while Aeromarine AM-1 showed marked spiral instability at only slightly higher value of 93. Aeromarine E0 is satisfactory at 25, while the "Malo" displayed "unstable oscillations" at 26. We repeat that we can be reasonably certain only of narrow range near the best value of 62, but that we cannot deviate far from it, without risk of instability.

We want to call the reader's attention to the fact that value of coefficient of lateral stability indicates the *kind* of stability or instability and not the *degree* of it. If the coefficient is low, the airplane tends to oscillate badly about the straight line of flight repeatedly crossing it, and it can be controlled best by the rudder. If the coefficient is high, the airplane tends to deviate from straight path for good and to assume spiral flight. It can be controlled best by ailerons. Even if the coefficients do not deviate far enough from the normal value to cause actual instability, they indicate the nature of controls on turns, favoring the use of rudder in one case and ailerons in another.

If the coefficient has normal value of 62, the airplane is stable in the sense that it has no tendency to deviate from the straight course on its own accord, and that use of ailerons and rudder is well balanced. Whether the airplane will return to normal flight after some disturbance or not depends on the actual amount of dihedral or fin surface, which control the degree of stability.

The airplane with no dihedral and exceedingly small fin area may be proportioned to have the coefficient of 62. It will have then no tendency to deviate from the normal flight, and in calm weather it can be flown with hands off. On turns it has no tendency to overbank, neither has it any preference to correct bank. If it is disturbed by a gust of wind, or by a jerk of controls it will side slip or skid indefinitely without any tendency to right itself. We say that this airplane is neutral in regard to stability.

The normal airplane must have fair amount of the fin surface, and the dihedral proportioned so as to give the normal value of the coefficient of 62. Then not only it will not deviate from straight flight on its own accord, but will return to it after each disturbance. On turns it will have definite preference to correct bank, and will assume it naturally, even if rudder and aileron movements are not properly coordinated by the pilot. It can be controlled by either ailerons or rudder, or by any combination of both. Not requiring very fine coordination of these two controls, it will be easy to fly.

So, the ratio of stability in yaw to stability in roll, which we termed the coefficient of lateral stability, must have certain fixed value if instability is to be avoided. We suggest the fixed value of 60. The degree of stability is determined by actual amount of stability in yaw or of stability in roll. The designer can have here very wide choice of their amount. As long as the machine is stable and ailerons and rudder have thereby their natural effects, the degree of stability is of secondary importance. There is one condition, however, which leads us to choice of rather high degree of stability. This is the condition of controllability at the angles above stalling and freedom from incipient spin.

When the airplane is stalled and reaches the angle at which autorotation is possible, the drop of one wing is accompanied by large increase of drag of this wing. This drag is further increased by lowering the aileron, when the pilot attempts to check the roll. Greatly increased drag of the dropping wing yaws the airplane to the same side, and the yaw generates additional rolling moment accelerating the autorotation. These events follow one another in rapid succession and the deadly incipient spin develops. Theory and practice agree in that incipient spin can be prevented, and the plot can retain the control of the machine, if the rudder is powerful enough to overcome the yawing tendency of the wing. It has been shown[2] that this condition is fulfilled, if

$$[5] \qquad \frac{s\ l}{S\ b} \geq 0.05$$

where s—area of the fin and rudder in sq. ft.
S—area of wings.
b—half span.
l—distance from center of gravity to the center of pressure on fin and rudder, or approximately to the rudder hinge.

This expression calls for somewhat larger fin and rudder area than is found on most of the present day airplanes.

We suggest to the designer, therefore, to choose the area of his vertical tail surface from the consideration of controllability at low speed and at the angles above stalling, using formula [5]. Once the area of the vertical tail surface is decided upon, the amount of dihedral needed for stability can be easily determined from the formula [4]. Let us assume for example that we are laying out the design of an airplane and have decided already on the wing area of 300 sq. ft., on the span of 32 ft. and on the length of tail from center of gravity to the rudder hinge of 15 ft. Let us assume, moreover, that side area of the fuselage is equal to 60 sq. ft., and that nose of the fuselage projects 7 ft. ahead of C.G., making total length of fuselage, including propeller spinner, 22 ft. The center of pressure on the side of fuselage we will assume to be at 25 per cent. of its length, i. e. 5. 5 ft. from the bow or 1.5 ft. ahead of center of gravity. From the expression [5] we have:

$$\frac{s \times 15}{300 \times 16} = 0.05$$

hence

$$\mathbf{S} = \frac{0.05 \times 300 \times 16}{15} = \mathbf{16\ sq.\ ft.}$$

Aspect ratio $R = 32^2/300 = 3.41$

$$n = \frac{0.1\ R}{R+Z} = 0.063$$

from expression [4], substituting $\beta + 0.5$ instead of β. and K=60 as explained above, we have

$$60 = \frac{0.030 \times 16 \times 15 - 0.015 \times 60 \times 1.5}{0.063 \times 300 \times 16 \times (\beta + 0.5)} \times 10{,}000$$

or

$$18144\beta = 72000 - 13500 - 9070 \times 49430$$

$$\beta = \mathbf{2.7\ deg.}$$

Thus we find that our airplane should have the mean dihedral of 2.7 deg. and the vertical tail area of 16 sq. ft.

(1) *"Stability and Controllability of Airplanes"— Aviation, April 27, 1925.*
(2) *A. C. A. Rep. and Memo. No. 1077.*
(3) *E. P. Warner "Aerodynamics" page 410.*
(4) *"The Control of Stalled Airplanes"— The Journal of Royal Aeronautical Society, June, 1926.*

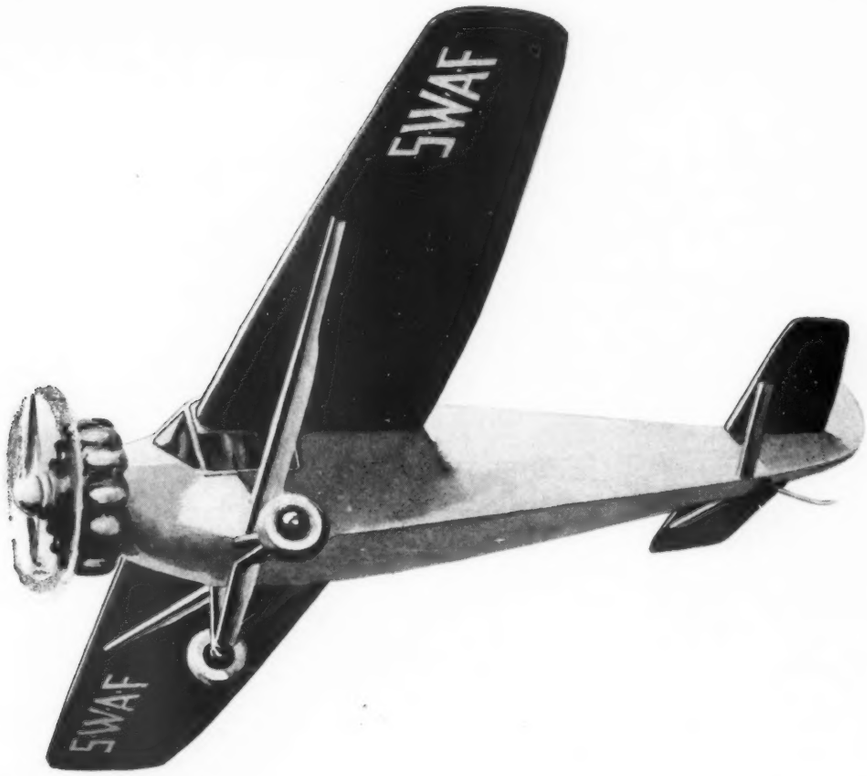

NOW
S-W Protective Coatings for Aircraft

After months of research, testing and experimentation, Sherwin-Williams now announces a complete line of super finishes and protective coatings for aircraft.

These new products meet every requirement of modern airplane finishing. They include a superior quality of Lacquer Enamel and Dope upon which leading aircraft manufacturers have already put the stamp of approval. Each product has indisputably proved its superior merit and in every way it measures up to Sherwin-Williams standards—famous for quality the world over.

Send coupon or write for the Sherwin-Williams Airplane Finish Color Card. It will bring prices and full particulars of the greatest line of protective coatings for airships thus far put on the market.

THE SHERWIN-WILLIAMS CO.
Cleveland, Ohio
Largest Paint and Varnish Makers in the World

SHERWIN-WILLIAMS
AIRPLANE FINISH

THE SHERWIN-WILLIAMS CO.,
Dept. 701—601 Canal Road, N. W., Cleveland, Ohio
Please send complete data on Opex Lacquer Enamels and other finishes for aircraft.
Business Title..... Name.....
Address..... City..... State.....

THANK YOU *for mentioning* AVIATION

POWER - POWER - POWER!

Whirlwind Power

150 H.P. — 225 H.P. — 300 H.P.

that combines SAFETY *with* SPEED



THE new Wright Production Programme is gauged to meet the needs of plane builders and commercial air line operators who want Whirlwind efficiency in a wider range of plane design than the original Whirlwind provided.

NOW, builders and operators will find the new Whirlwind Series in power sizes that cover every phase of commercial and private flying augmented by a nation-wide Service Organization that reaches into every aviation center.

The public knows and trusts
Wright Engines

WRIGHT AERONAUTICAL CORPORATION
Paterson, N. J., U. S. A.
CANADIAN WRIGHT LIMITED, Sole Licensees for Canada, Montreal
AUTHORIZED PARTS DEALERS
Air Associates, Inc., *Curtiss Field, Long Island, N. Y.*
Pacific Aeromotive Corp., *Los Angeles, Cal.*
Stout Air Services, Inc., *Dearborn, Mich.*

AERONAUTICAL CHAMBER OF COMMERCE

"NOR WILL ANY AGE FORGET THE FIRST FRAIL CRAFT WHICH BLAZED THE TRAIL OF MAN'S CONQUEST OF THE UPPER BLUE!"

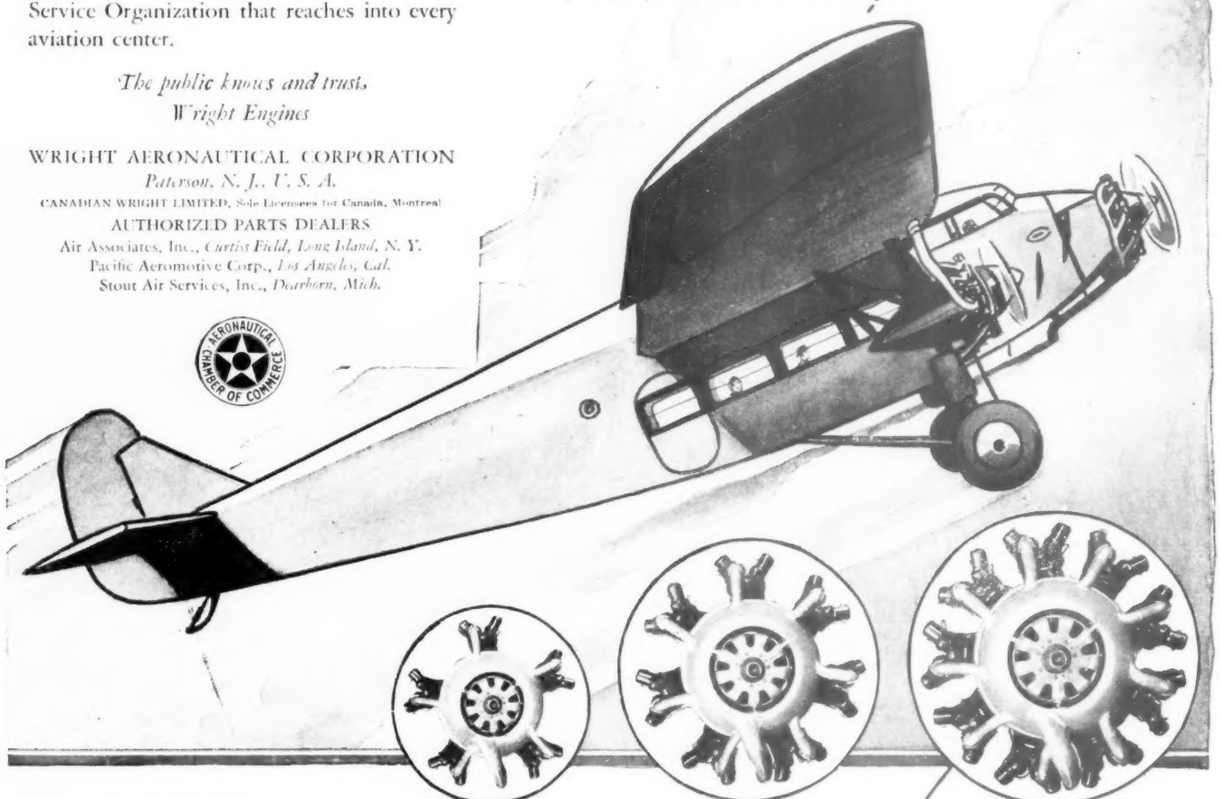

WRIGHT

The FIRST NAME *in* FLYING